SAMSUNG

3 CD CHANGER
MINI MINI COMPONENT
MAX-909/910/916/929/930/932(P)
MAX-936/938/939/940/941

SERVICE Manual

MIMI MIMI COMPONENT SYSTEM

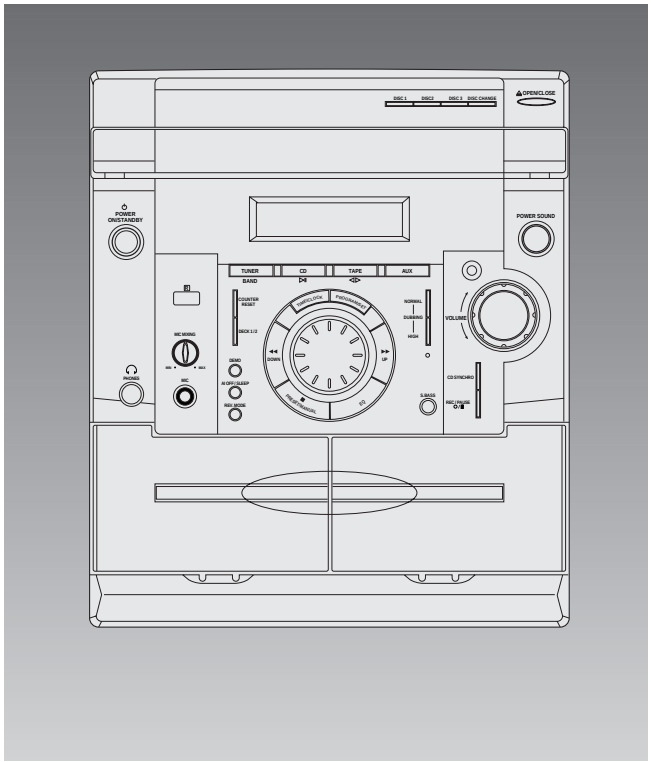

CONTENTS

1. Alignment and Adjustments
2. Exploded Views and Parts List
3. Electrical Parts List
4. Block Diagrams
5. PCB Diagrams
6. Wiring Diagram
7. Schematic Diagrams

* Comparision chart

MODEL NAME	POWER	Connecting SPK	SPK Type	Basic Model
MAX900	15W	PS920E	ONE WAY	MAX900
MAX909	40W	PS929E	ONE WAY	MAX910
MAX910	40W	PS930E	180° UNDIRECTIONAL	MAX910
MAX916	40W	PS936E	270° UNDIRECTIONAL	MAX910
MAX920	15W	PS920E	ONE WAY	MAX920
MAX929	40W	PS929E		MAX930
MAX930	40W	PS930E		MAX930
MAX936	40W	PS936E		MAX932
MAX932(P)	40W	PS932	PS932E + PSC90 + PSR90	MAX932
MAX938	40W	PS938	PS938E + PSC90 + PSR90	MAX932
MAX939	60W	PS939E	THREE WAY	MAX940
MAX940	60W	PS940E	270° UNDIRECTIONAL	MAX940
MAX941	60W	PS941SE	PS940E + PSR90	MAX940

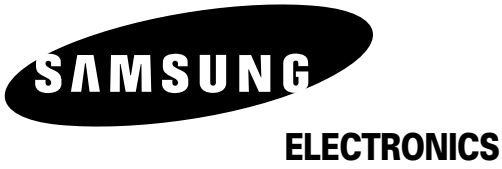

© Samsung Electronics Co.,Ltd. MAR. 1999
Printed in Korea
Code no. AH68-00073D

1. Alignment and Adjustments

1-1 Tuner

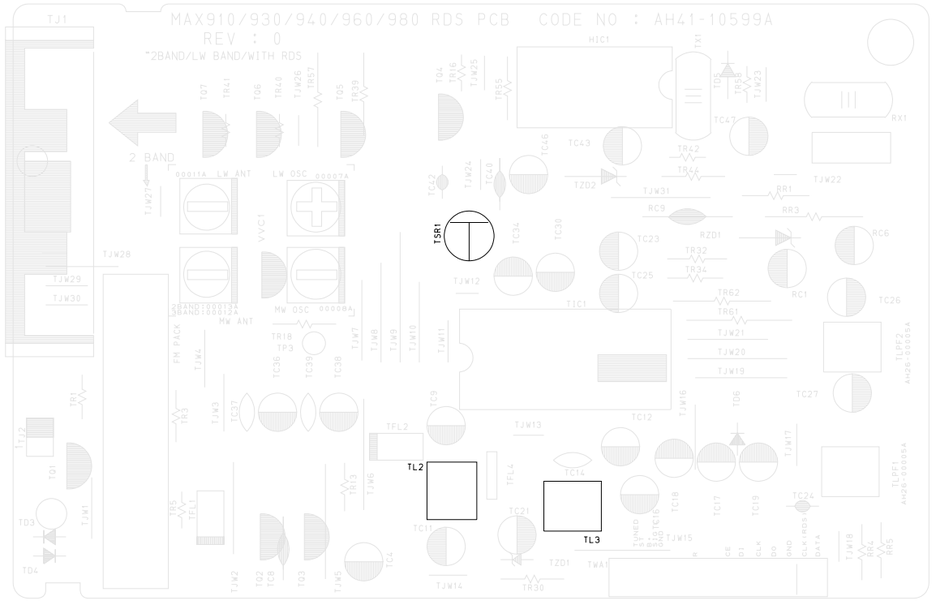

Fig1-1. Adjustment location of Tuner Part

FM Search Level Adjustment	
SSG FREQ.	98 MHz
Adjustment point (TSR1)	BEACON SENSITIVITY SEMI-VR(10KΩ)
Output	1kHz 28dB
Adjust IVR1 so that "TUNED" of FLT is lighted (Figure 1-3)	
4Gain : 20dB(CE standard)	

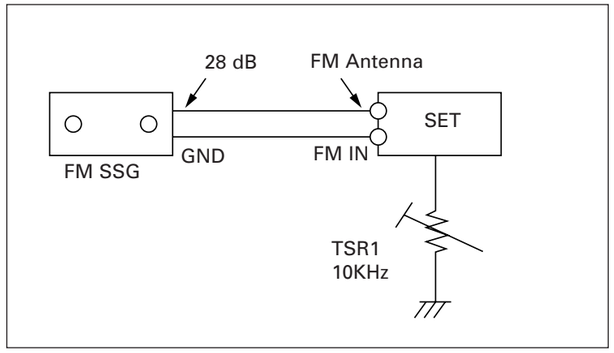

Figure1-3 FM Auto Search Level Adjustment

AM(MW) I.F Adjustment	
SSG FREQ.	450 kHz
Frequency	522 kHz
Adjustment point (TL2)	AM I.F COIL
Maximum output (Figure 1-4)	

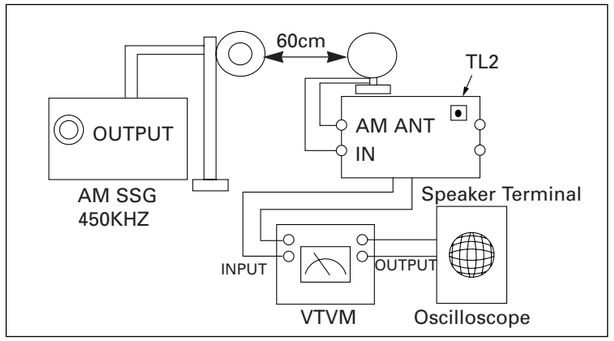

Figure1-4 AM I.F Adjustment

* When adjusting T.H.D., readjust I/F coil on the Tuner Pack.

FM THD Adjustment	
SSG FREQ.	98 MHz
Adjustment point (TL3)	FM DETECTOR COIL
Output	60 dB
Minumum Distortion (0.3% below) (Figure 1-2)	

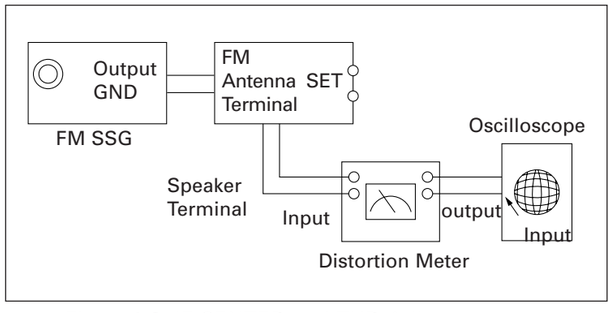

Figure1-2 IF CENTER and THD Adjustment

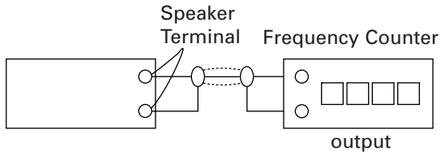

Figure 1-5

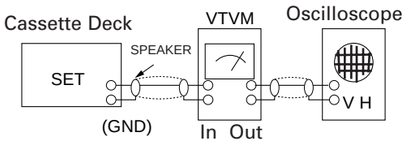

Figure 1-6



Figure 1-7

1-2 Cassette Deck

1-2-1 To Adjust Tape Speed

Notes
* Measuring tape: i) MTT-111 (or equivalent)
(Tapes recorded with 3kHz)
ii) MTT-5512 (or equivalent)

- Adjust SPEED Control

Step	Item	Tape	Pre-Setup	Adjust Point	Standard	Figure	Remark
1	SPEED Control	MTT-111N (3KHZ)	Press play button after puting tape into the Deck1	UVR2(COMMON)	3 kHZ ±1%	Fig. 1-5	Front PCB
				DVR3(Only MAX909/910/916)	3 kHZ ±1%	Fig. 1-5	Main PCB
2	HI SPEED Control	MTT-111 (3KHZ)		No Adjustment	-	Fig. 1-5	5200~6600Hz Check

- Adjust Record Frequency

Step	Item	Tape	Pre-Setup	Adjust Point	Frequency Range	Figure	Remark
1	L,R Unbalance	MTT-112B (1KHZ)		DVR4	±0.5dB	Fig. 1-6	SPEAKER VTVM (A-DECK)
2	Record Frequency	MTT-5512	Press Rec button after connecting (Fig1-6)	DL4	60KHZ±1KHZ (Only MAX909/910/916) 85KHZ±1KHZ(COMMON)	Fig. 1-6	DCW4

- Adjust Azimuth

Step	Item	Tape	Pre-Setup	Adjust Point	Standard	Figure	Remark
1	Azimuth	MTT-113CN		Adjustment screw of HEAD	8KHZ	Fig. 1-7	Output:Maximum

- Adjust Rec Bias Voltage

Step	Item	Tape	Pre-Setup	Adjust Point	Votage Range	Remark
1	Rec Bias Voltage	MTT-5512 (3KHZ)		SVR1 SVR2	7V±0.5V	Connect to MWF6 from AC Meter.

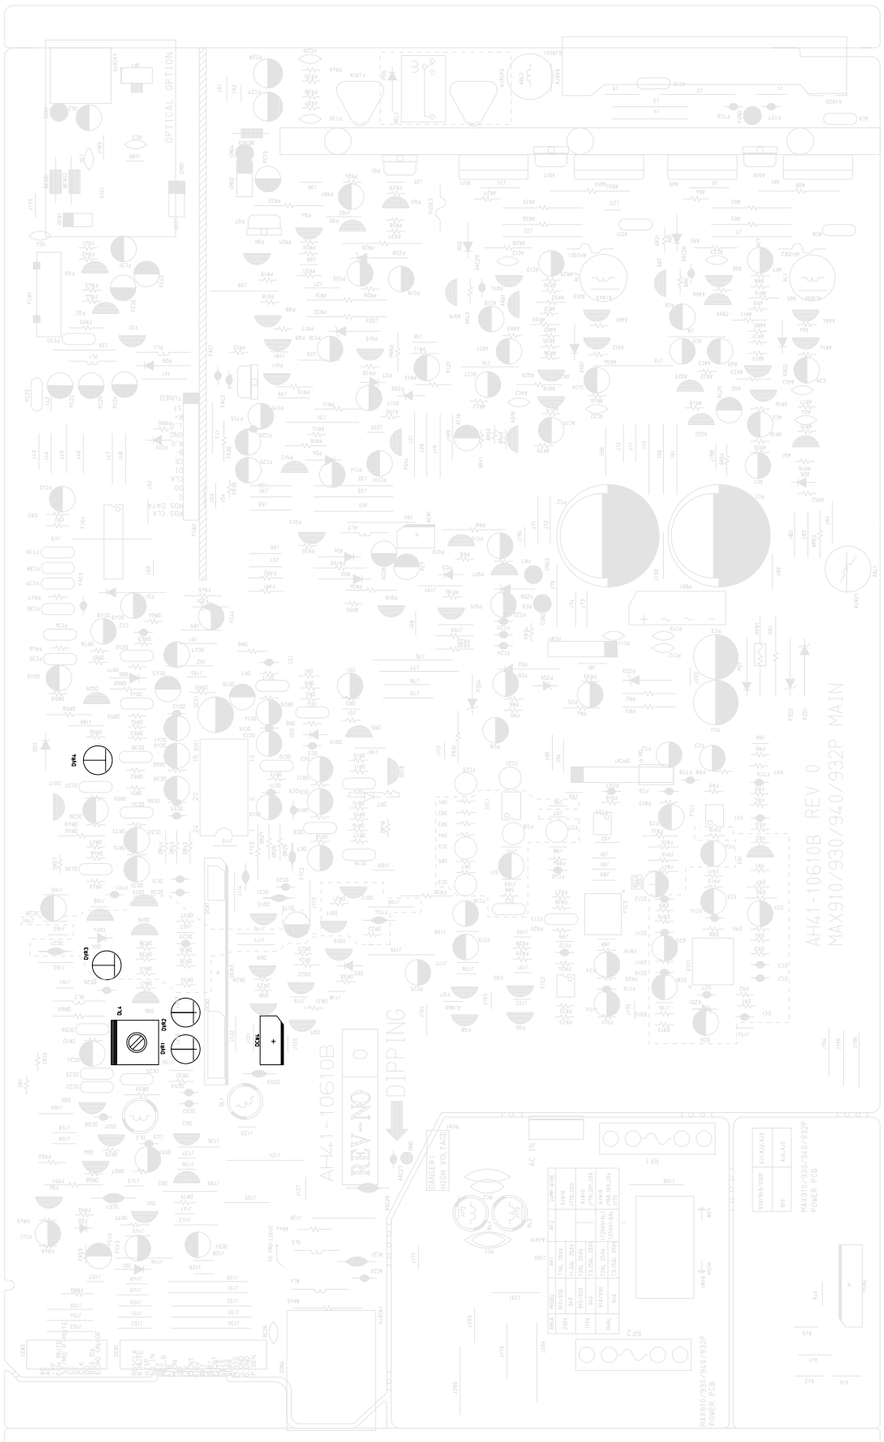

Fig1-8. Adjustment location of Deck Part

2.Exploded Views and Parts List

2-1 Cassette Deck Exploded View and Parts List :

2-1-1 Application Model : MAX939/940/941

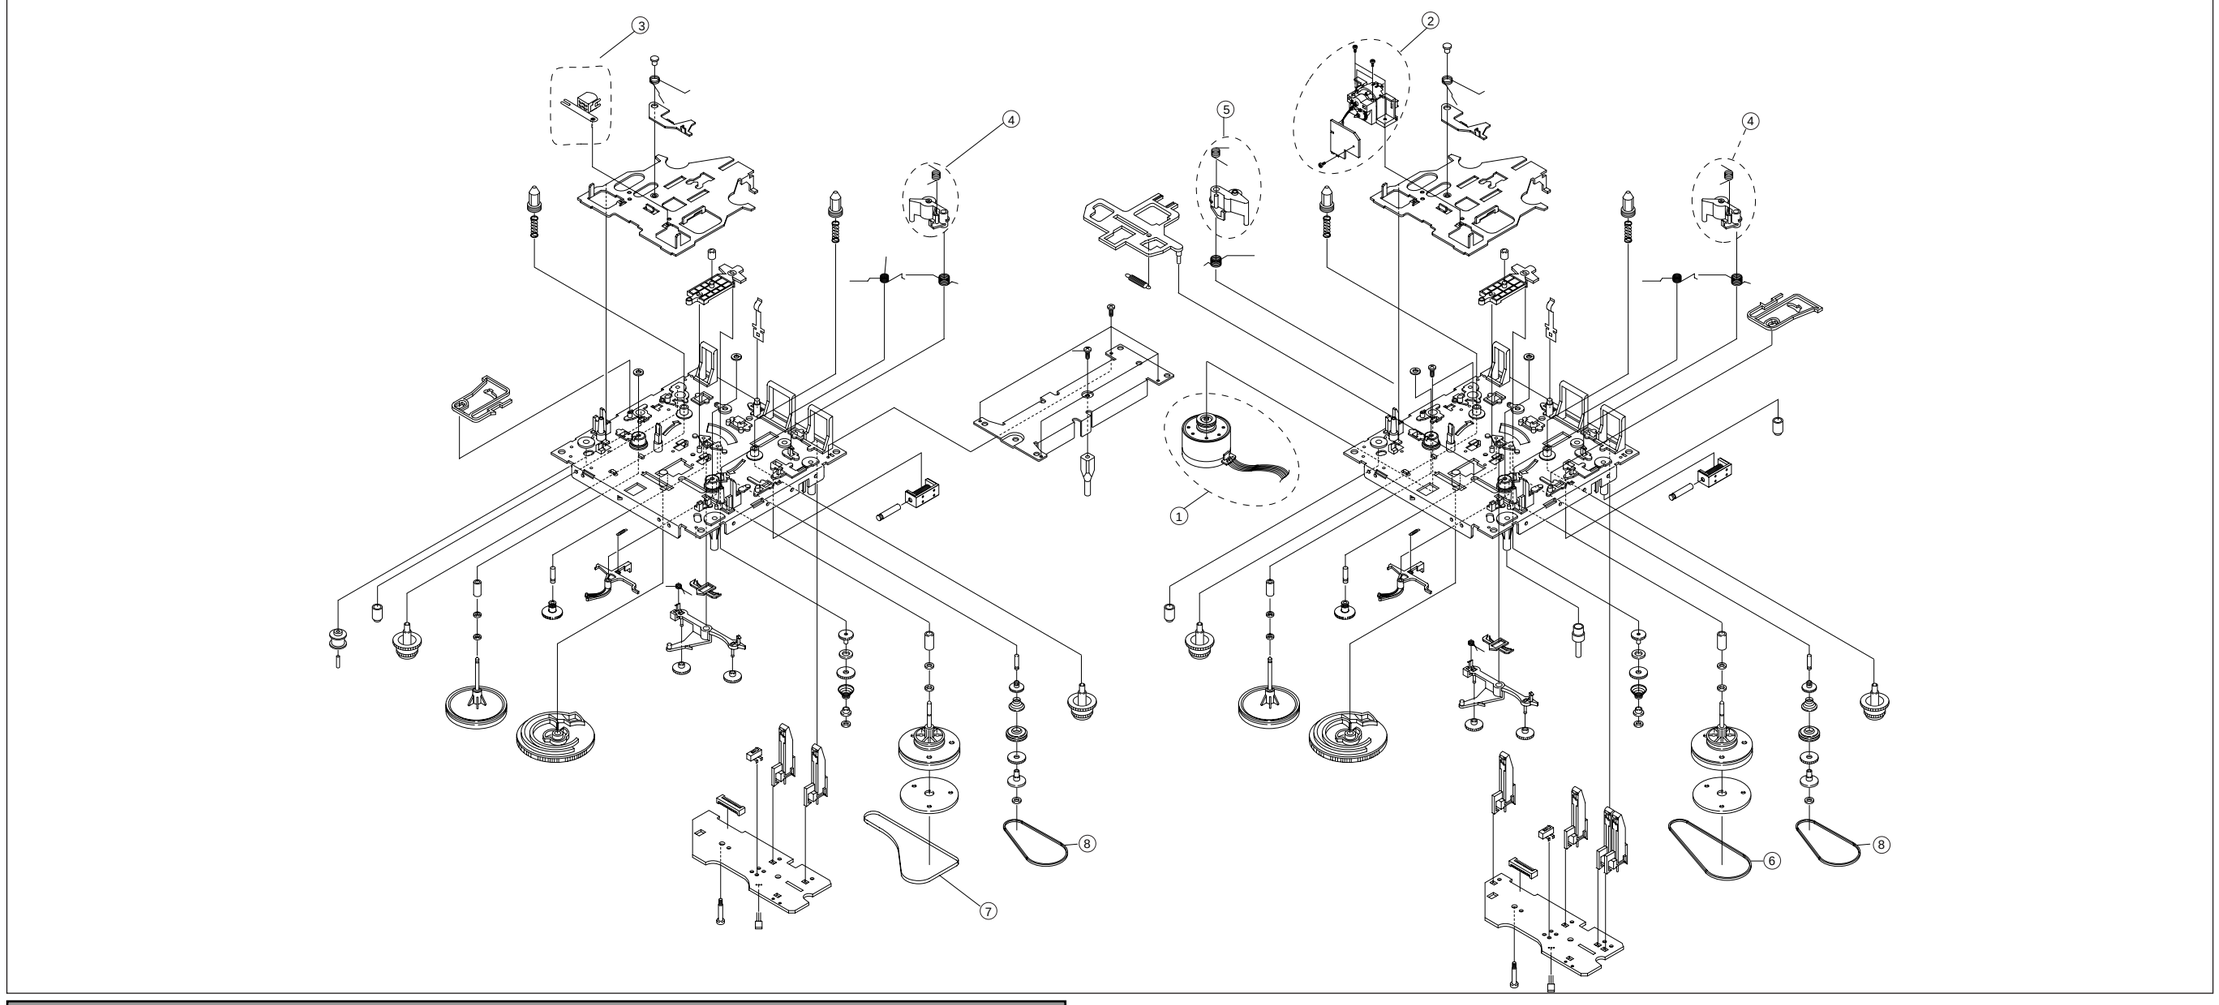

No.	Code No.	Description	Specification	Remarks
	AH59-20006B	DECK-CASSETTE	ADR2113MW3	
1	AH81-11052G	MOTOR ASS'Y	EG530YD2BH	
2	AH81-10798Y	HEAD ASS'Y(R/P)	YK56RAA4N3	
3	AH81-10022E	HEAD ASS'Y(P/B)	MS15RAA2N1	
4	AH81-10798K	PINCH ARM(F)	ADR2100-06	
5	AH81-10798M	PINCH ARM(R)	ADR2100-07	
6	AH81-10798Q	MAIN BELT(R/P)	ADR2113MW-02	
7	AH81-10798T	MAIN BELT(P/B)	ADR2113MW-03	
8	AH81-10798U	SUB BELT	ADR2100-09	

2-1-2 Application Model : MAX929/930/936

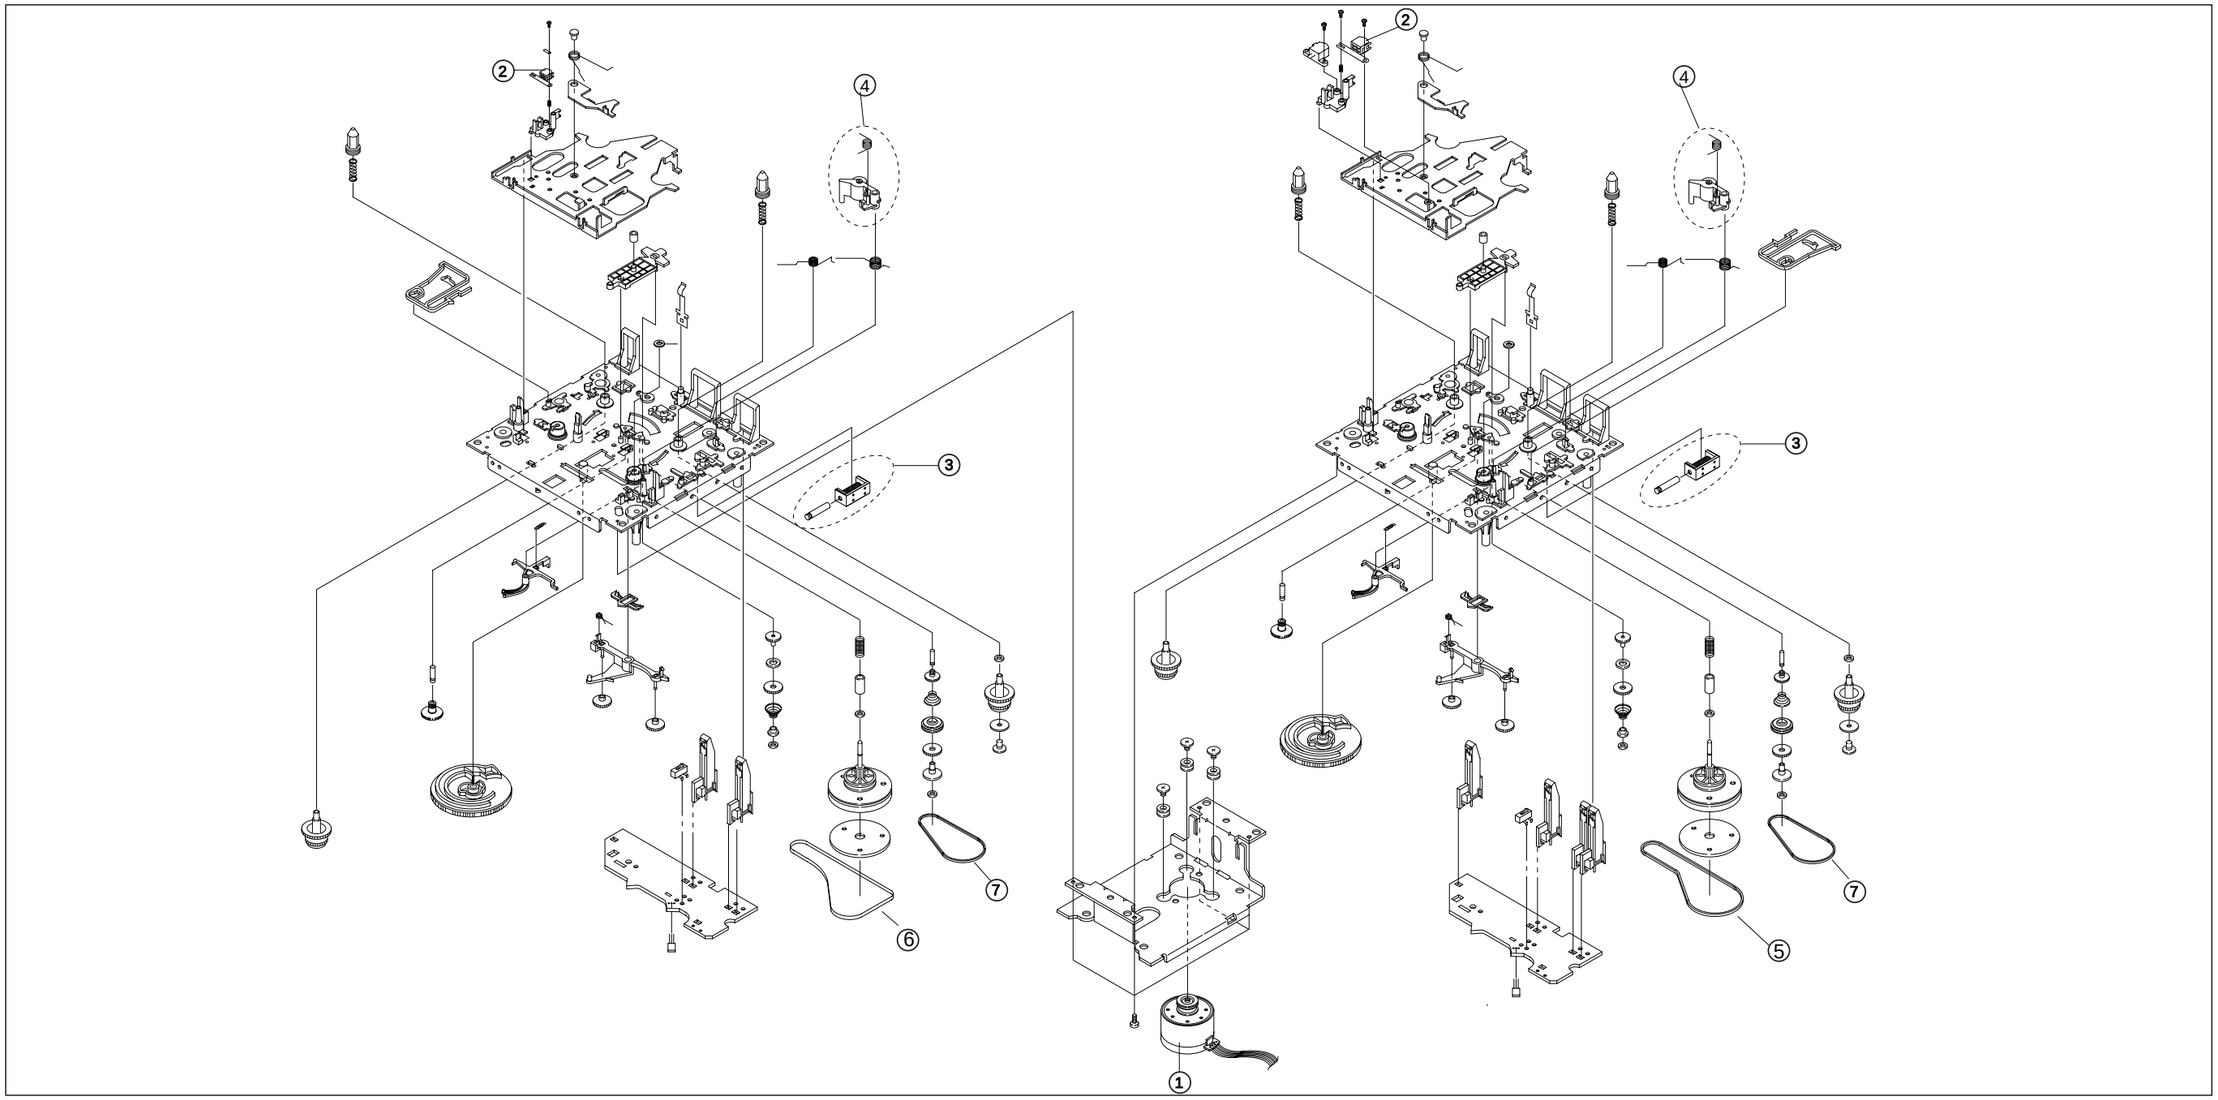

No.	Code No.	Description	Specification	Remarks
	AH59-20005U	DECK-CASSETTE	ADR2113SW3	
1	AH81-11052G	MOTOR ASS'Y	EG530YD2BH	
2	AH81-10022E	HEAD ASS'Y(P/B)	MS15RAA2N1	
3	AH81-10798V	SOLENOID ASS'Y	ADR2100-10(24Ω)	
4	AH81-10798K	PINCH ARM(F)	ADR2100-06	
5	AH81-10798Q	MAIN BELT(R/P)	ADR2113MW-02	
6	AH81-10798T	MAIN BELT(P/B)	ADR2113MW-03	
7	AH81-10798U	SUB BELT	ADR2100-09	

2-1-3 Application Model : MAX909/910/916 - Samsung Cassette Deck(Auto Stop)

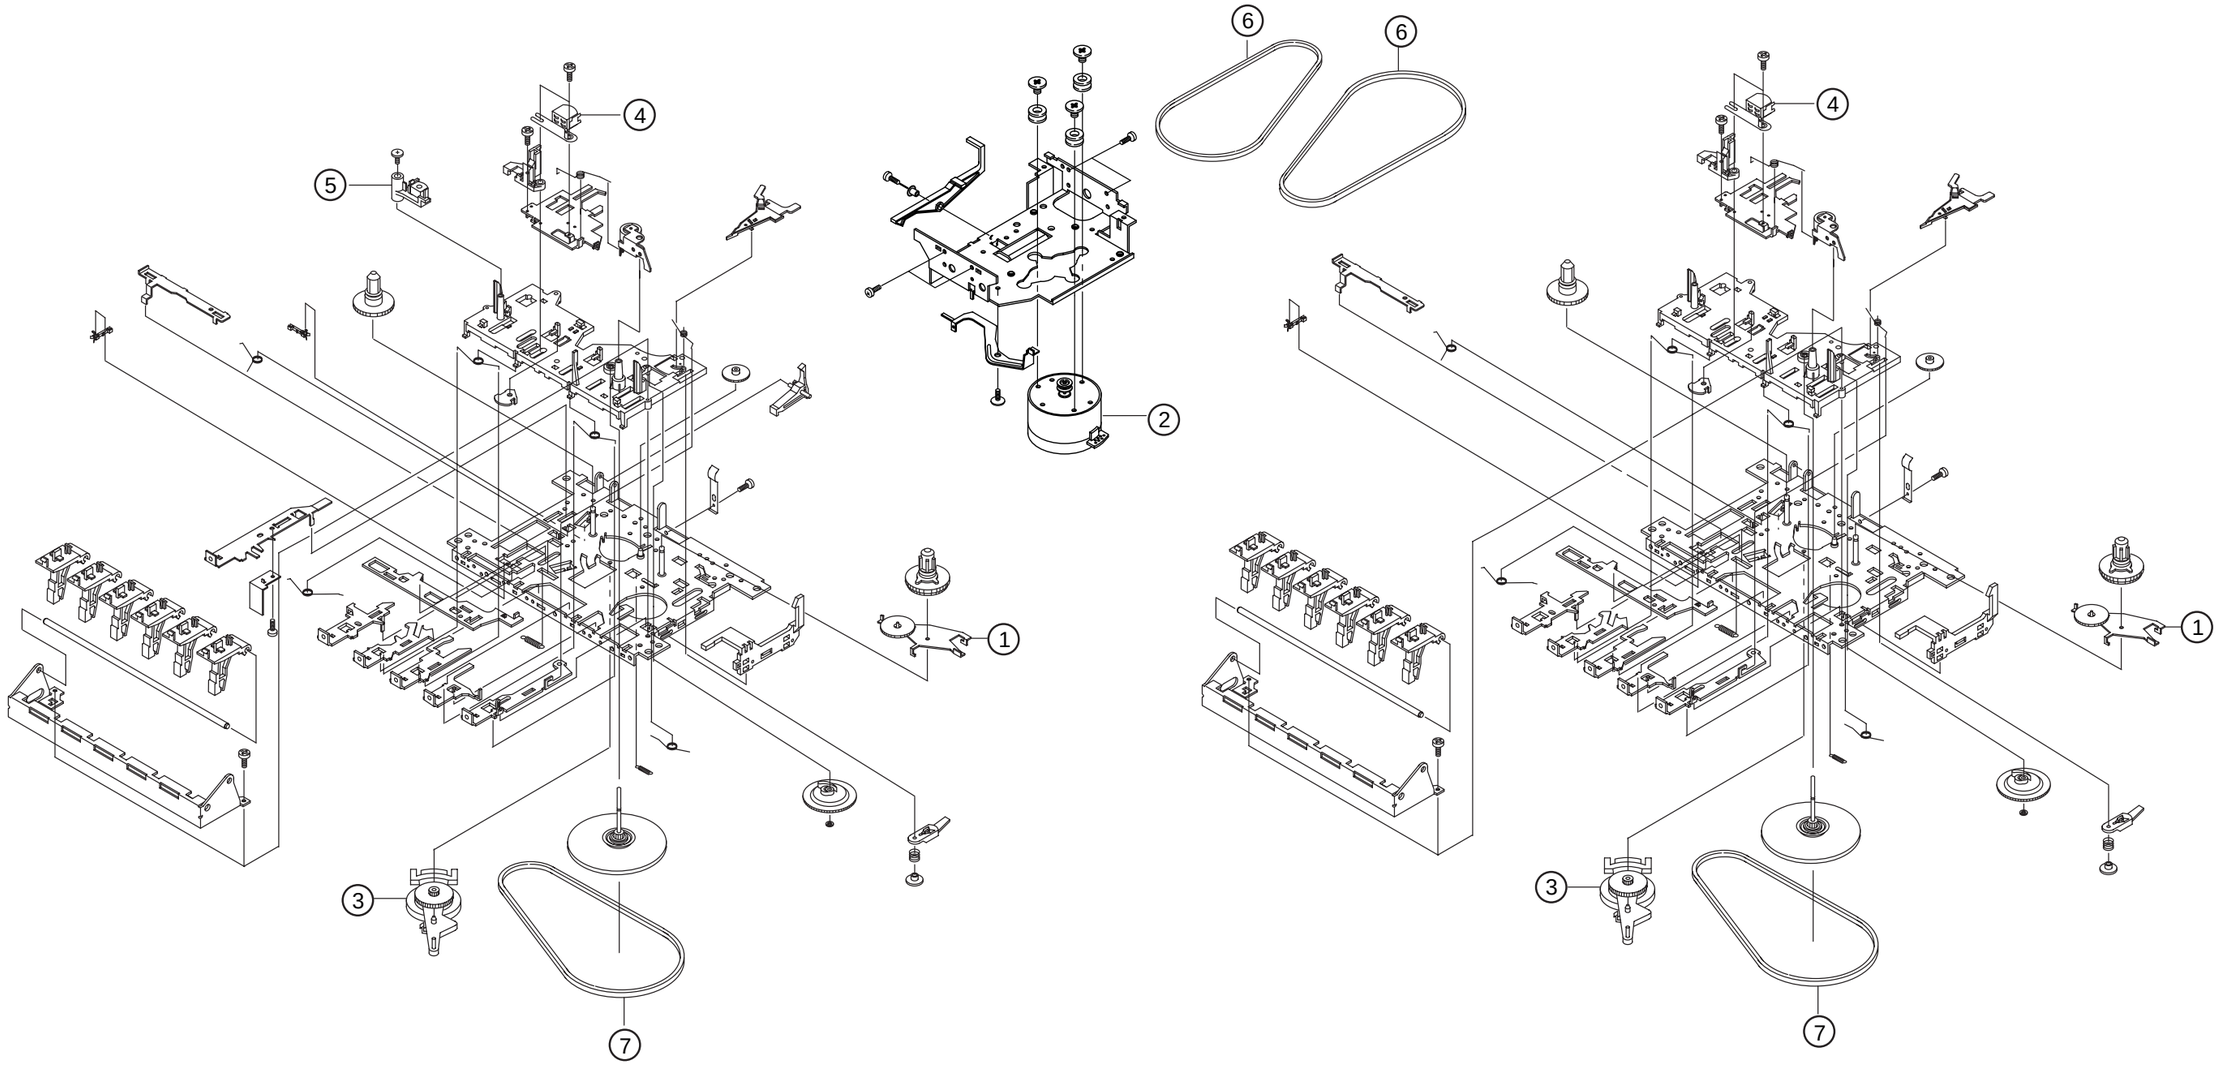

No.	Code No.	Description	Specification	Remarks
	AH59-20005K	DECK-CASSETTE	ADR2006FW2	
1	AH81-10025E	IDLER ARM ASS'Y	ADR02-042	
2	AH81-11037Q	MOTOR	EG530YD2BH	
3	AH81-10025J	FR ARM ASS'Y	ADR22-012	
4	AH81-11150W	R/P HEAD	TC-591	
5	AH81-11150X	ERASE HEAD	TC-230AN	
6	AH81-10026L	BELT MAIN	59.7 PI X 1.0T	
7	AH81-10026H	BELT SUB	34.7 PI X 1.0T	

2-1-4 Application Model : MAX909/910/916 -Yanion Cassette Deck (Auto Stop)

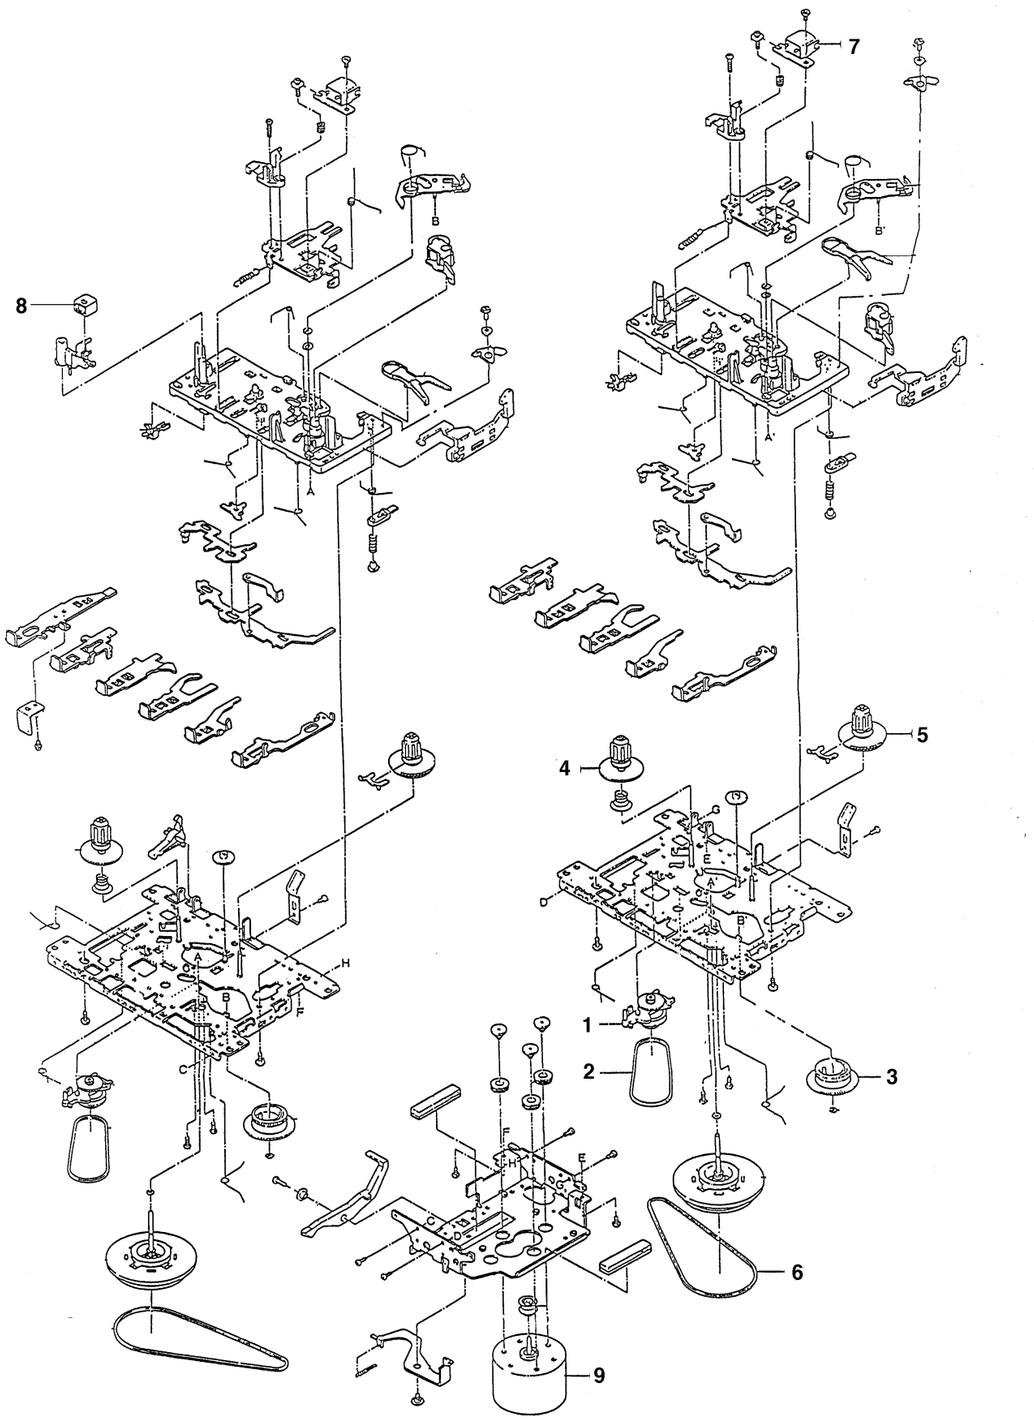

No.	Code No.	Description	Specification	Remarks
	AH59-20005X	DECK-CASSETTE	YN21ZSW-77	
1	AH81-11037D	R.F PULLEY ASS'Y	8521-200090-300	
2	AH81-11154D	BELT SUB	6600-090014-001	
3	AH81-11037H	CAM GEAR	6021-200802-001	
4	AH81-11037J	S REEL ASS'Y	8521-200080-300	
5	AH81-11037K	T REEL ASS'Y	8521-200070-300	
6	AH81-11154E	BELT MAIN	6600-090020-001	
7	AH81-11150W	R/P HEAD	TC-591	
8	AH81-11150X	ERASE HEAD	TC-230AN	
9	AH81-11037Q	MOTOR	EG530YD2BH	

2-1-5 Application Model : MAX909/910/916 - Yanion Cassette Deck (Auto Reverse)

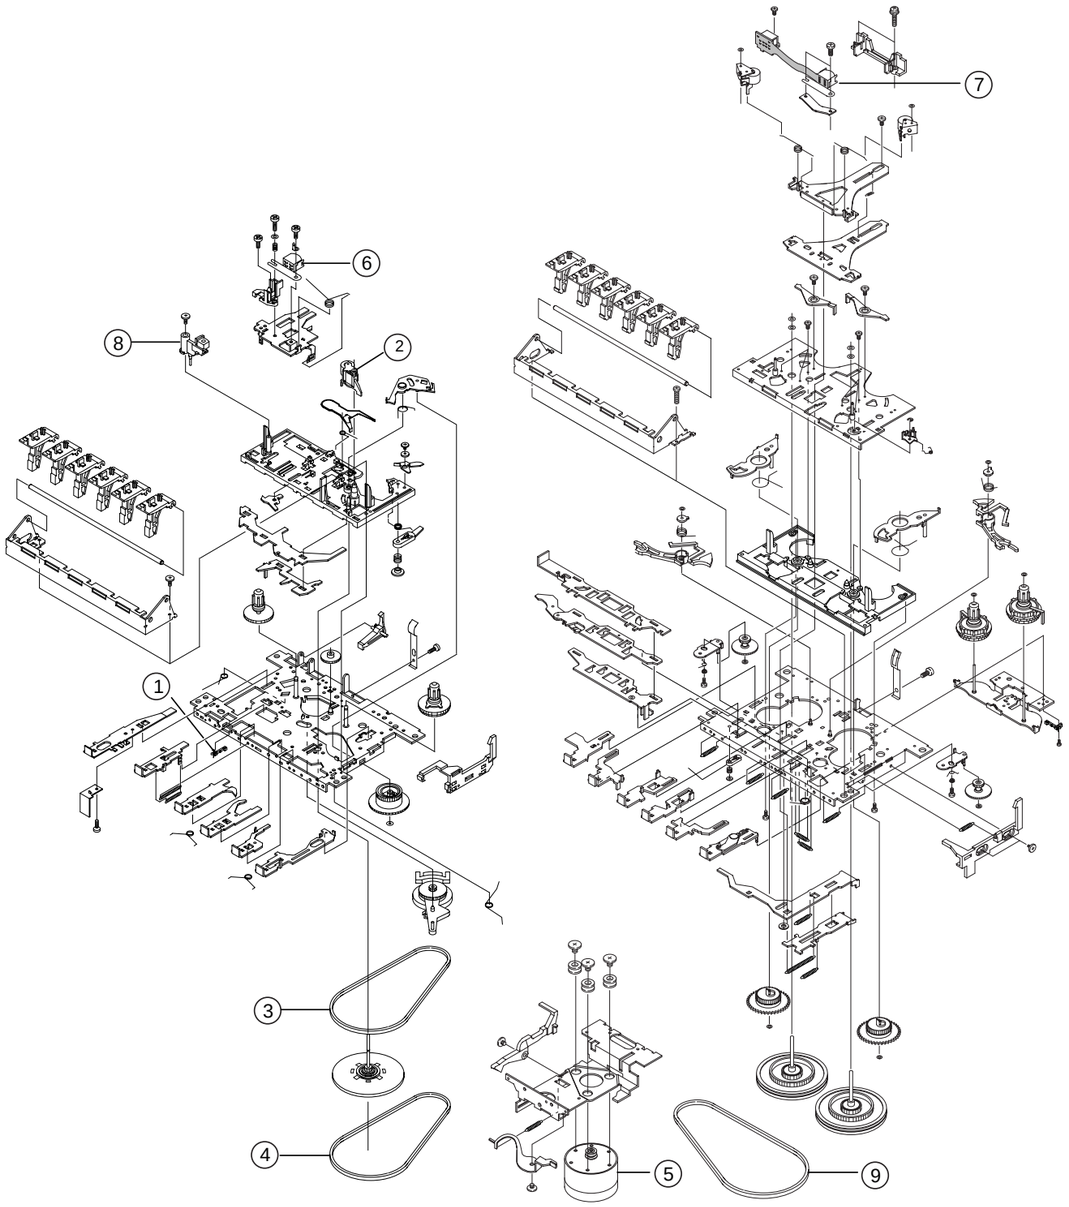

No.	Code No.	Description	Specification	Remarks
	AH59-20004E	TAPE DECK ASS'Y	YN921ZSW-41	
1	AH81-10005W	LEAF SWITCH	MSW-1541T	
2	AH81-10005Z	PINCH ROLLER ARM ASS'Y	1921-04-301	
3	AH81-10006C	RF BLET	1921-07-03	
4	AH81-10006R	MAIN BELT	1821-12-173	
5	AH81-11037Q	MOTOR	EG530YD2B	
6	AH81-10022E	R/P HEAD	MS15R-AA2N1	
7	AH81-10022H	P/B HEAD	MR359-KF243	
8	AH81-10022T	E-HEAD	PHK380-MS16A	
9	AH81-10023W	MAIN BELT	1821-17-03	

2-2 Total Exploded View and Parts List

2-2-1 Total Exploded1 - Application Model : MAX939/940/941

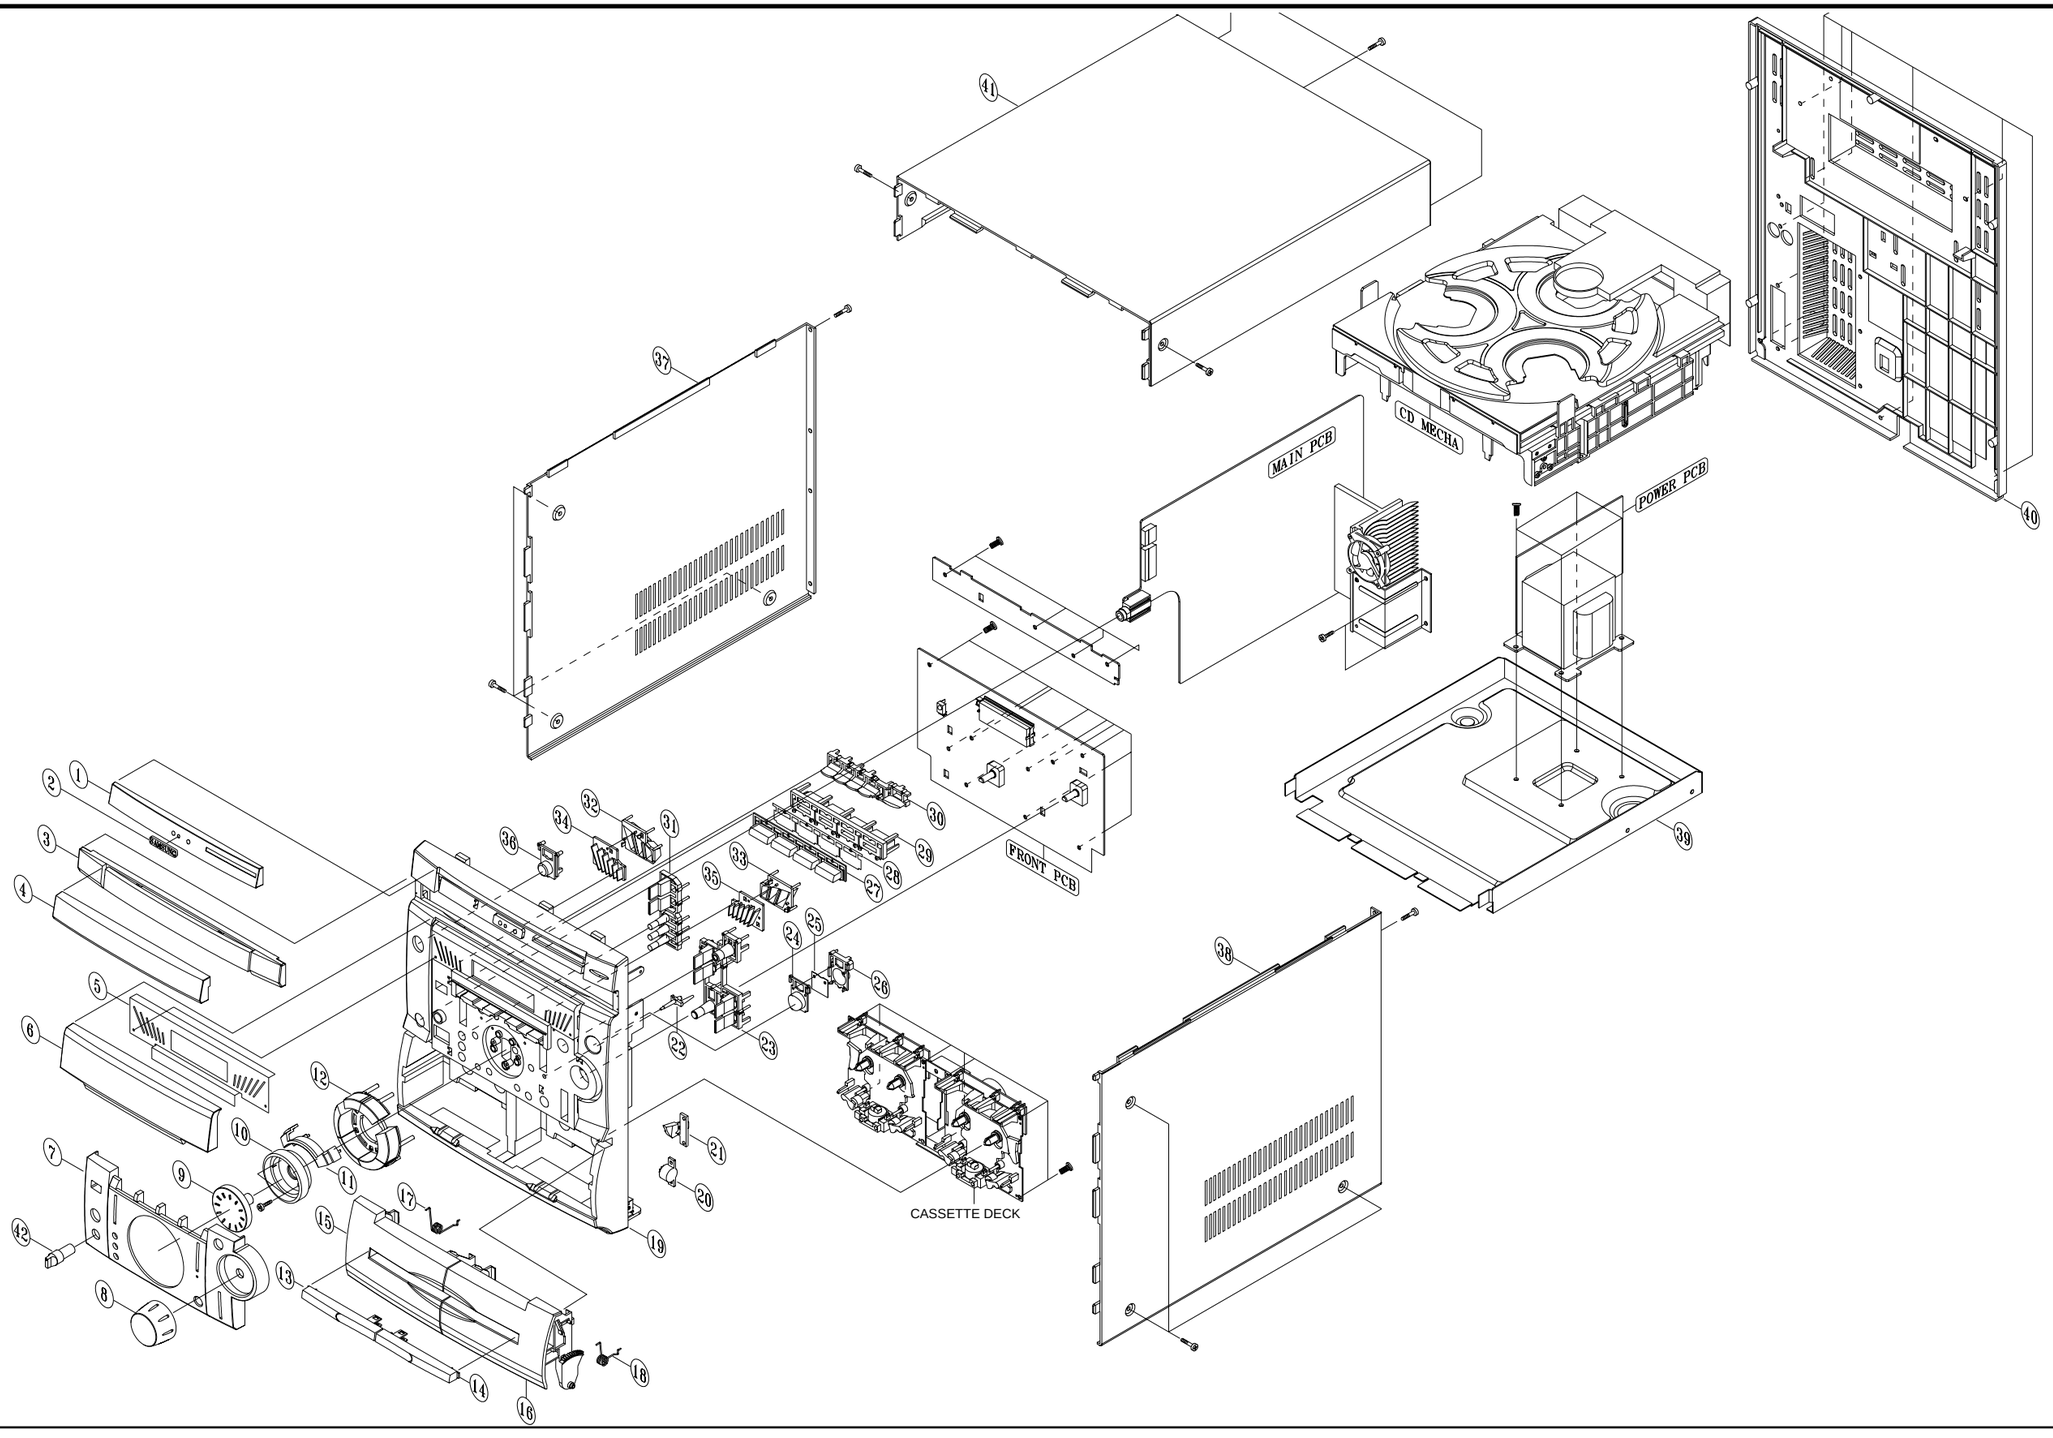

2-2-2 Parts List of Total Exploded view1 - Application Model : MAX939/940/941

No.	Code No.	Description	Specification	Q'TY	Remarks
1	AH64-40457B	WINDOW-CD	PMMA 850-71129	1	EXP-BASIC
1	AH64-40457C	WINDOW-CD	PMMA 850-71129	1	RDSÈƒ
2	AH64-70003M	BADGE BRAND	ABS H/STAMPING 30MM	1	
3	AH64-50353B	DOOR-CD	ABS L/GRAY(G6236)	1	ALL COMMON
4	AH64-40458B	WINDOW-DOOR,CD	PMMA 850-71129	1	MAX-940/EXP
5	AH67-40036A	FILTER-VFD	PC 0.3T BLK	1	ALL COMMON
6	AH64-40459A	WINDOW-VFD	PMMA 850-41802	1	ALL COMMON
7	AH61-20535B	CAP-FRONT,E	MIPS D/GRAY	1	940 SURROUND
7	AH61-20535D	CAP-FRONT,E	MIPS D/GRAY	1	940 RDS, SURROUND
7	AH61-20536B	CAP-FRONT,D	MIPS D/GRAY(G3174)	1	940 MICÍÛ, SURROUND
8	AH64-11321B	KNOB-VOLUME	L/GRAY(G6236)	1	ALL COMMON
9	AH64-11322B	KNOB-JOG	ABS NATURAL	1	
10	AH64-40462A	DECO-JOG	ABS 94HB BLK	1	ALL COMMON
11	AH61-20537B	CAP-TIMER	ABS NATURAL	1	
12	AH64-11317B	KNOB-TIMER	ABS NATURAL	1	ALL COMMON
13	AH64-40460A	WINDOW-DOOR,A	PMMA 850-71129	1	ALL COMMON
14	AH64-40461A	WINDOW-DOOR,B	PMMA 850-71129	1	ALL COMMON
15	AH64-50351B	DOOR-CASS.A	ABS L/GRAY(G6236)	1	
16	AH64-50352B	DOOR-CASS.B	ABS L/GRAY(G6236)	1	AUTO REVERSE
17	AH61-62004A	SPRING-EJECT,A	STS •'1.1	1	ALL COMMON
18	AH61-62005A	SPRING-EJECT,B	STS •'1.1	1	ALL COMMON
19	AH64-30441B	CABINET-FRONT	MIPS L/GRAY(G6236)	1	
20		ASS'Y DAMPER		2	
21		ASS'Y LATCH		2	
22	AH67-10187A	LENS-REC	PMMA MILKY	1	ALL COMMON
23	AH64-11318A	KNOB-DUBBING	D/GRAY(G3174)	1	ALL COMMON
24	AH67-10184B	LENS-TURBO	ACRYL CLR	1	
25	AH67-40038A	FILTER-TURBO	KIMO 100	1	ALL COMMON
26	AH61-20543A	HOLDER-TURBO	ABS WHT	1	ALL COMMON
27	AH67-10186B	LENS-FUNTION	ACRYL CLEAR	1	
28	AH67-40037A	FILTER-FUNCTION	KIMO 100	1	
29	AH61-20544A	HOLDER-FUNCTION	ABS WHT	1	
30	AH64-11315A	KNOB-DISC	L/GRAY(G3174)	1	ALL COMMON
31	AH64-11319A	KNOB-DEMO	D/GRAY(G3174)	1	ALL COMMON
32	AH61-20541A	HOLDER-COM,L	ABS WHT	1	
33	AH61-20542A	HOLDER-COM,R	ABS WHT	1	
34	AH67-10182A	LENS-COM,L	PMMA MILKY	1	
35	AH67-10183A	LENS-COM,R	PMMA MILKY	1	
36	AH64-11316B	KNOB-POWER	L/GRAY(G6236)	1	ALL COMMON
37	AH64-30444A	CABINET-SIDE,L	MIPS M/GRAY	1	ALL COMMON
38	AH64-30445A	CABINET-SIDE,R	MIPS M/GRAY	1	ALL COMMON
39	AH64-30416A	CABINET-BOTTOM	SECC 1.0T	1	ALL COMMON
40	AH64-30446B	CABINET-REAR	MIPS M/GRAY	1	BASIC (=DOM, EXP-BASIC)
40	AH64-30446C	CABINET-REAR	MIPS M/GRAY	1	BASIC + DIGITAL OUT
40	AH64-30446D	CABINET-REAR	MIPS M/GRAY	1	BASIC + SURROUND
41	AH64-30443A	CABINET-TOP	MIPS M/GRAY	1	ALL COMMON
42	AH64-11214C	KNOB-MIC	D/GRAY(G3174)	1	BUYER OPTION

2-2-3 Parts List of Total Exploded view2 - Application Model : MAX929/930/936

No.	Code No.	Description	Specification	Remarks
1	AH64-40457B	WINDOW-CD	PMMA 850-71129	EXP-BASIC
	AH64-40457C	WINDOW-CD	PMMA 850-71129	RDS
2	AH64-70003H	BADGE-BRAND	AL	SAMSUNG
3	AH64-50353B	DOOR-CD	ABS L/GRAY(G6236)	ALL COMMON
4	AH64-40458C	WINDOW-DOOR,CD	PMMA 850-71129	EXP-BASIC
	AH64-40458H	WINDOW-DOOR,CD	PMMA 850-71129	MAX929
	AH64-40458N	WINDOW-DOOR,CD	PMMA 850-71129	MAX936
5	AH67-40036A	FILTER-VFD	PC 0.3T BLK	ALL COMMON
6	AH64-40459A	WINDOW-VFD	PMMA 850-41802	ALL COMMON
7	AH61-20536D	CAP-FRONT,D	MIPS D/GRAY	MIC, SURROUND
	AH61-20536E	CAP-FRONT,D	MIPS D/GRAY	MIC, SRS
8	AH64-11321B	KNOB-VOLUME	L/GRAY(G6236)	ALL COMMON
9	AH61-20538B	CAP-JOG	ABS NATURAL	ALL COMMON
10	AH64-40462A	DECO-JOG	ABS 94HB BLK	ALL COMMON
11	AH61-20537B	CAP-TIMER	ABS NATURAL	ALL COMMON
12	AH64-11317B	KNOB-TIMER	ABS NATURAL	ALL COMMON
13	AH64-40460A	WINDOW-DOOR,A	PMMA 850-71129	ALL COMMON
14	AH64-40461A	WINDOW-DOOR,B	PMMA 850-71129	ALL COMMON
15	AH64-50351B	DOOR-CASS.A	ABS L/GRAY(G6236)	ALL COMMON
16	AH64-50352C	DOOR-CASS.B	ABS L/GRAY(G6236)	HIGH SPEED DUBBING
	AH64-50352B	DOOR-CASS.B	ABS L/GRAY(G6236)	AUTO REVERSE
17	AH61-62004A	SPRING-EJECT,A	STS •'1.1	ALL COMMON
18	AH61-62005A	SPRING-EJECT,B	STS •'1.1	ALL COMMON
19	AH64-30441B	CABINET-FRONT	MIPS L/GRAY(G6236)	ALL COMMON
20	AH61-80030A	ASS'Y DAMPER	POM	ALL COMMON
21	AH95-500011A	ASS'Y LATCH		ALL COMMON
22	AH67-10187A	LENS-REC	PMMA MILKY	ALL COMMON
23	AH64-11318A	KNOB-DUBBING	ABS D/GRAY(G3174)	ALL COMMON
24	AH67-10184B	LENS-TURBO	ACRYL CLR	ALL COMMON
25	AH67-40038A	FILTER-TURBO	KIMO 100	ALL COMMON
26	AH61-20543A	HOLDER-TURBO	ABS WHT	ALL COMMON
27	AH64-11320B	KNOB-FUNTION	L/GRAY(G6236)	ALL COMMON
28	AH64-11315A	KNOB-DISC	L/GRAY(G3174)	ALL COMMON
29	AH64-11319A	KNOB-DEMO	D/GRAY(G3174)	ALL COMMON
30	AH64-11316B	KNOB-POWER	L/GRAY(G6236)	ALL COMMON
31	AH64-11214C	KNOB-MIC	ABS D/GRAY(G3174)	BUYER OPTION
32	AH61-00021A	SUPPORT-PCB	ABS 94HB BLK	
33	AH64-30444A	CABINET-SIDE,L	MIPS M/GRAY	
34	AH64-30445A	CABINET-SIDE,R	MIPS M/GRAY	
36	AH64-30416A	CABINET-BOTTOM	SECC 1.0T	ALL COMMON
37	AH64-30446B	CABINET-REAR	MIPS M/GRAY	BASIC (=DOM, EXP-BASIC)
	AH64-30446C	CABINET-REAR	MIPS M/GRAY	BASIC + DIGITAL OUT
	AH64-30446D	CABINET-REAR	MIPS M/GRAY	BASIC + SURROUND
35	AH64-30443A	CABINET-TOP	MIPS M/GRAY	

MAX-930 EXPLODED VIEW

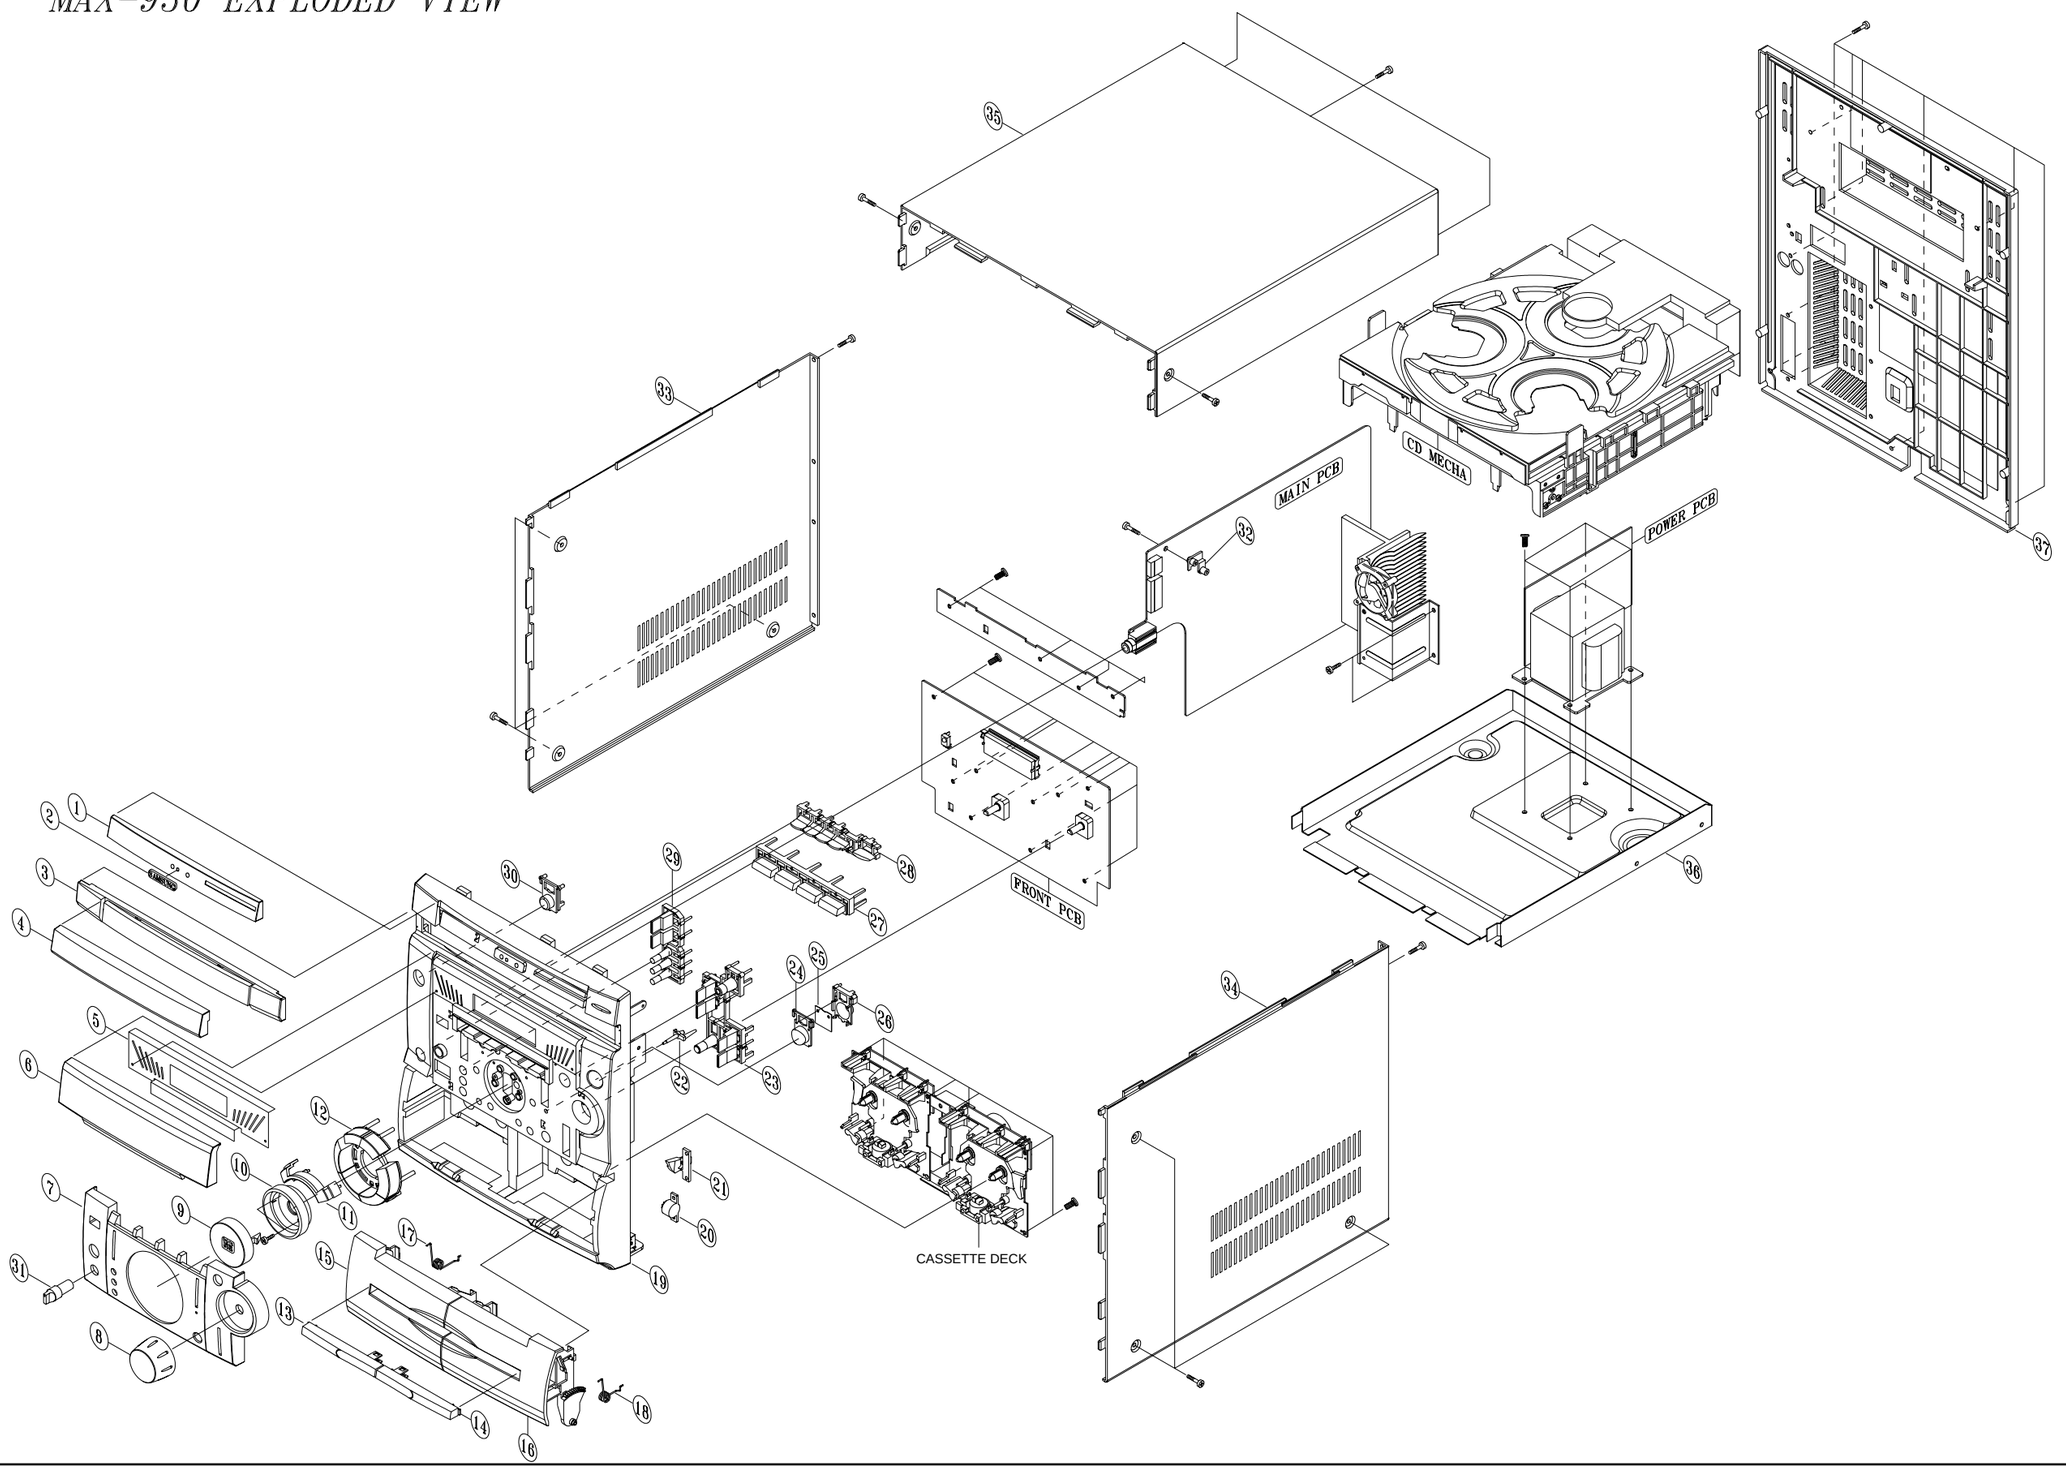

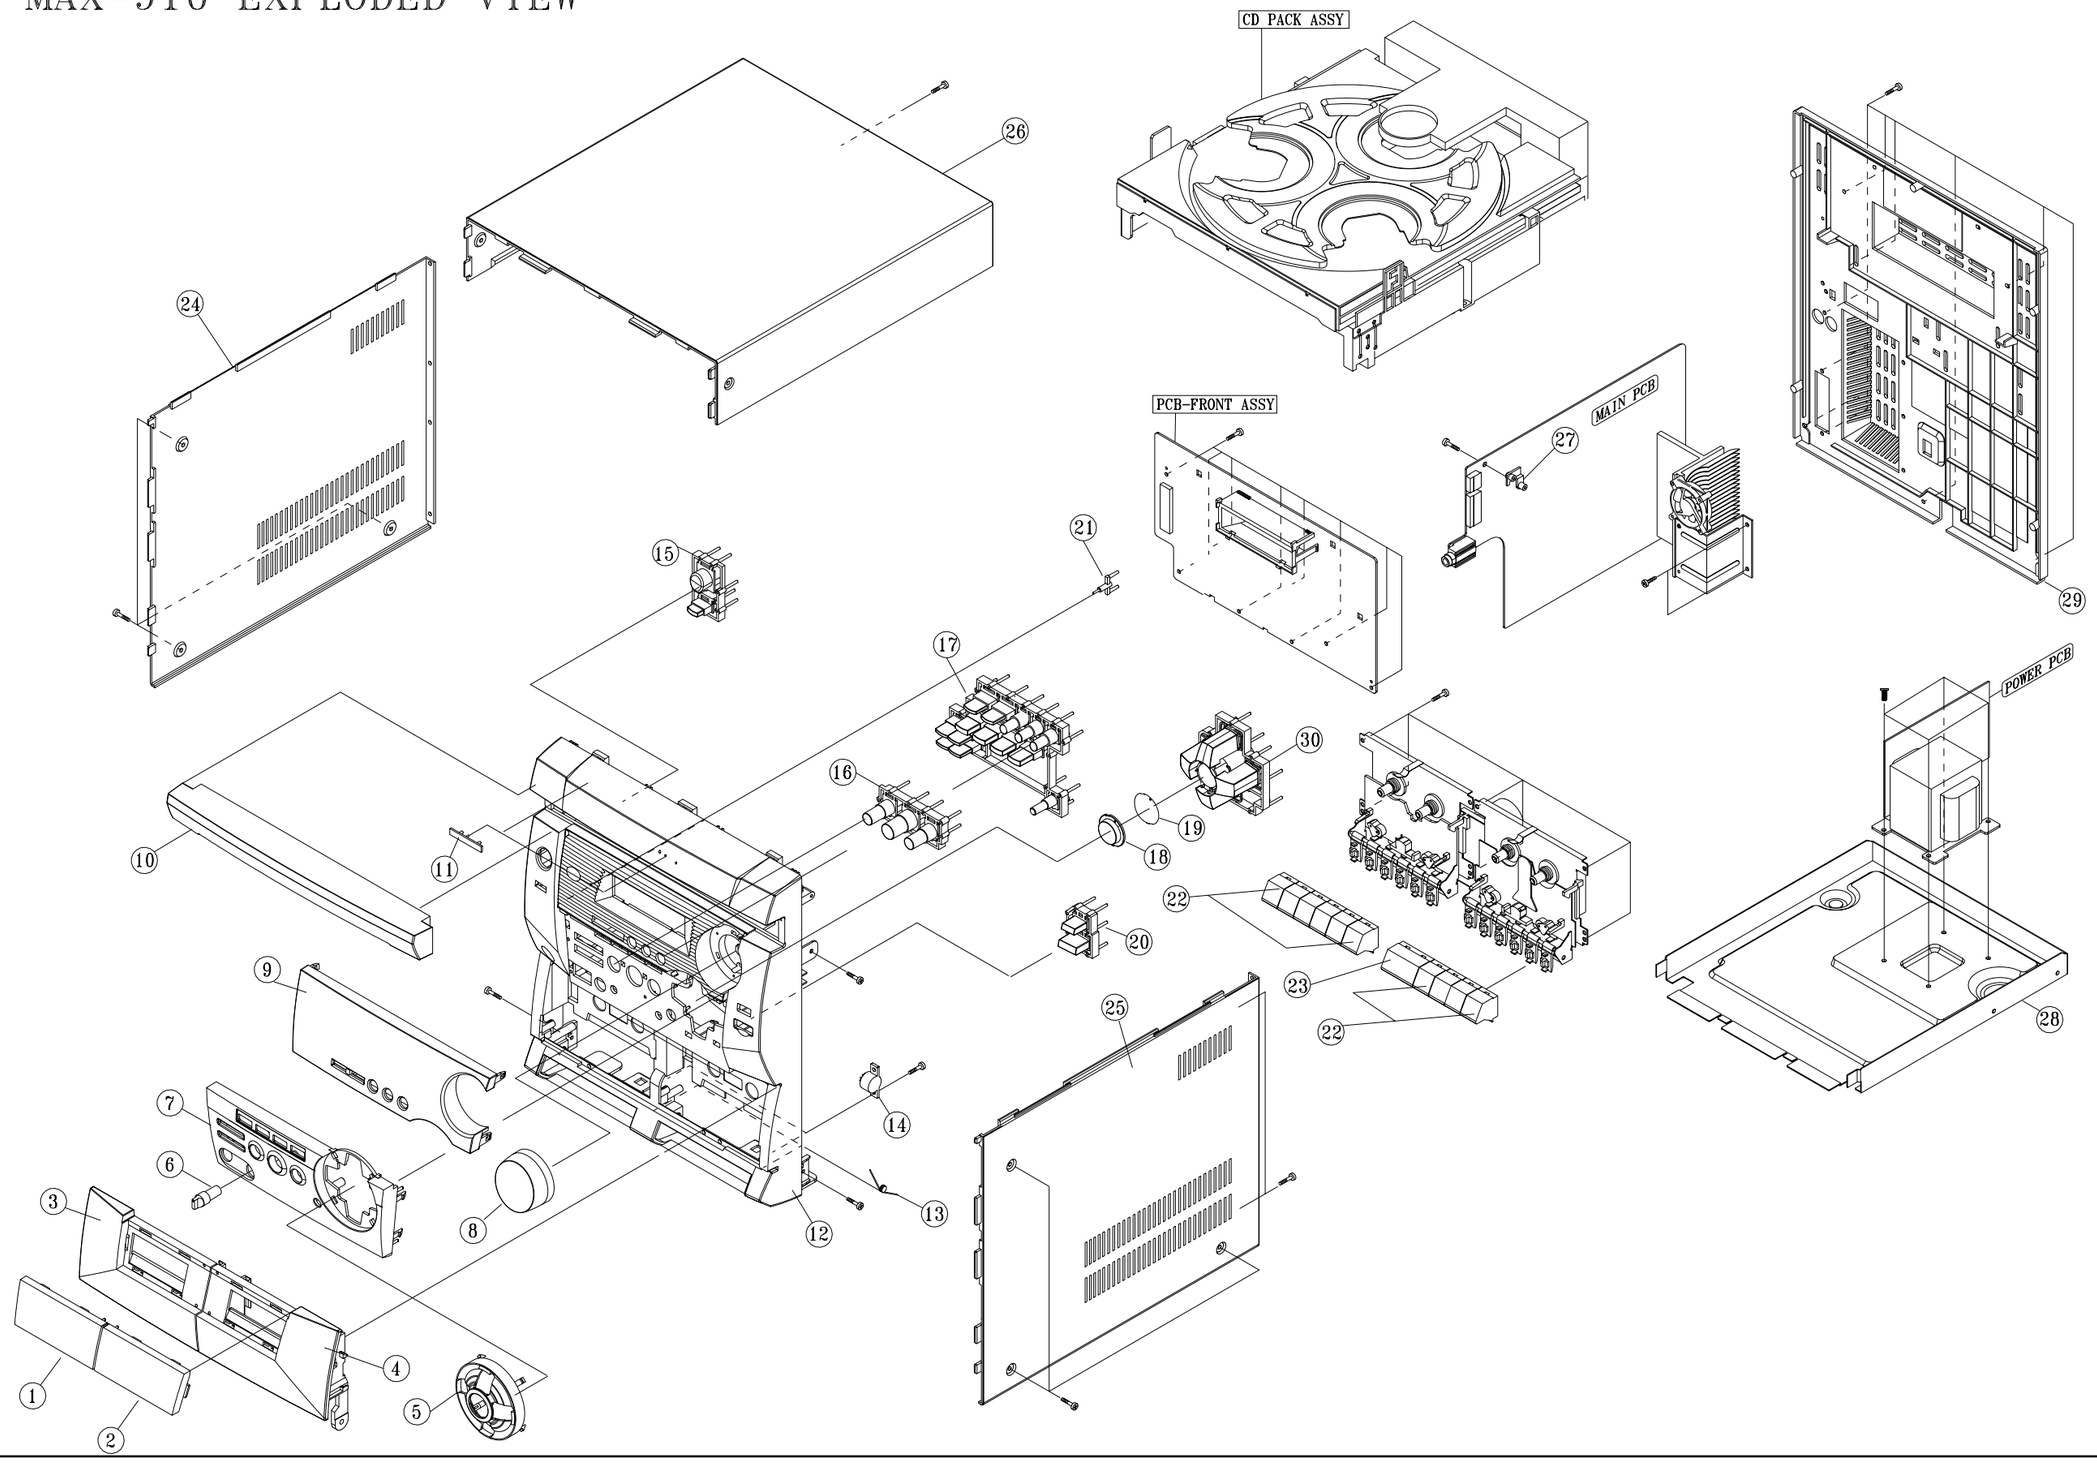
MAX-910 EXPLODED VIEW
CD PACK ASSY
PCB-FRONT ASSY
MAIN PCB
POWER PCB
1
2
3
4
5
6
7
8
9
10
11
12
13
14
15
16
17
18
19
20
21
22
23
24
25
26
27
28
29
30

2-2-6 Parts List of Total Exploded view3 - Application Model : MAX909/910/916

No.	Code No.	Description	Specification	Remarks
1	AH64-40471A	WINDOW-DOOR,A	PMMA 850-43329	
2	AH64-40472A	WINDOW-DOOR,B	PMMA 850-43329	
3	AH64-50357B	DOOR-CASS,A	ABS L/GRAY(G6236)	
4	AH64-50358B	DOOR-CASS,B	ABS L/GRAY(G6236)	
5	AH64-40468B	DECORATION-EQ	ABS L/GRAY(G6236)	
6	AH64-11339A	KNOB-MIC	ABS D/GRAY(G3174)	
7	AH64-40467C	DECO-FRONT	ABS D/GRAY(G3174)	MIC, H/STAMPING
	AH64-40467D	DECO-FRONT	ABS D/GRAY(G3174)	H/STAMPING
8	AH64-11336B	KNOB-VOLUME	ABS L/GRAY(G6236)	
9	AH64-40470D	WINDOW-LCD	PMMA 850-43329	
	AH64-40470E	WINDOW-LCD	PMMA 850-43329	RDS
10	AH64-50359C	DOOR-TRAY	ABS L/GRAY(G6236)	
11	AH64-70003H	BADGE-BRAND	ABS BLK(H/STAMP)	
12	AH64-30449B	CABINET-FRONT	MIPS L/GRAY(G6236)	
13	AH61-00013A	SPRING-EJECT	SUS •'1.1	
14	AH61-80030A	DAMPER-ASSY	POM BLACK	
15	AH64-11337B	KNOB-POWER	MIPS L/GRAY(G6236)	
16	AH64-11342B	KNOB-DIRECTION	ABS NATURAL	
17	AH64-11338B	KNOB-FUNCTION	ABS M/GRAY(G4339)	
18	AH67-10192B	LENS-EQ	PMMA CLR	
19	AH67-40043A	FILTER-TURBO	PC 0.16t	
20	AH64-11343B	KNOB-CD	ABS L/GRAY(G6236)	
21	AH67-10168A	LENS-JOG	PMMA SMOKE	RDS
22	AH64-11340A	KNOB-CASS,S	ABS M/GRAY(G4339)	
23	AH64-11341A	KNOB-CASS,L	ABS M/GRAY(G4339)	
24	AH64-30444A	CABINET-SIDE,L	MIPS L/GRAY(G6236)	
25	AH64-30445A	CABINET-SIDE,R	MIPS L/GRAY(G6236)	
26	AH64-30443A	CABINET-TOP	MIPS L/GRAY(G6236)	
27	AH61-00021A	SUPPORT-PCB	ABS BLK	
28	AH64-30416A	CABINET-BOTTOM	SECC 1.0T	
29	AH64-30446B	CABINET-REAR	MIPS M/GRAY	
	AH64-30446C	CABINET-REAR	MIPS M/GRAY	DIGITAL OUT
	AH64-30446D	CABINET-REAR	MIPS M/GRAY	SURROUND
30	AH64-11334B	KNOB-EQ	ABS WHT	

2-2-7 Parts List of Total Exploded view4 - Application Model : MAX932/938

No.	Code No.	Description	Specification	Remarks
1	AH64-40457D	WINDOW-CD	PMMA VIOLET	
	AH64-40457E	WINDOW-CD	PMMA VIOLET	RDS
2	AH64-70003H	BADGE-BRAND	AL	SAMSUNG
3	AH64-50353B	DOOR-CD	ABS L/GRAY(G6236)	ALL COMMON
4	AH64-40458E	WINDOW-DOOR,CD	PMMA 850-71129	MAX-932
	AH64-40458M	WINDOW-DOOR,CD	PMMA 850-71129	MAX-938
5	AH67-40036A	FILTER-VFD	PC 0.3T BLK	ALL COMMON
6	AH64-40459A	WINDOW-VFD	PMMA 850-41802	ALL COMMON
7	AH61-20535K	CAP-FRONT,E	MIPS D/GRAY(G3174)	932P
	AH61-20535L	CAP-FRONT,E	MIPS D/GRAY(G3174)	932P, RDS
	AH61-20536F	CAP-FRONT,D	MIPS D/GRAY(G3174)	932P MICÍÛ
8	AH64-11321B	KNOB-VOLUME	L/GRAY(G6236)	
9	AH61-20538B	CAP-JOG	ABS NATURAL	
10	AH64-40462A	DECO-JOG	ABS 94HB BLK	
11	AH61-20537B	CAP-TIMER	ABS NATURAL	
12	AH64-11317B	KNOB-TIMER	ABS NATURAL	
13	AH64-40460A	WINDOW-DOOR,A	PMMA 850-71129	
14	AH64-40461A	WINDOW-DOOR,B	PMMA 850-71129	
15	AH64-50351B	DOOR-CASS.A	ABS L/GRAY(G6236)	
16	AH64-50352C	DOOR-CASS.B	ABS L/GRAY(G6236)	HIGH SPEED DUBBING
17	AH61-62004A	SPRING-EJECT,A	STS •'1.1	
18	AH61-62005A	SPRING-EJECT,B	STS •'1.1	
19	AH64-30441B	CABINET-FRONT	MIPS L/GRAY(G6236)	BASIC
20	AH61-80030A	ASS'Y DAMPER	POM	
21	AH95-500011A	ASS'Y LATCH	POM	
22	AH67-10187A	LENS-REC	PMMA MILKY	
23	AH64-11318A	KNOB-DUBBING	D/GRAY(G3174)	
24	AH67-10184B	LENS-TURBO	ACRYL CLR	
25	AH67-40038A	FILTER-TURBO	KIMO 100	
26	AH61-20543A	HOLDER-TURBO	ABS WHT	
27	AH64-11320B	KNOB-FUNTION	L/GRAY(G6236)	
28	AH64-11315A	KNOB-DISC	L/GRAY(G3174)	
29	AH64-11319A	KNOB-DEMO	D/GRAY(G3174)	
30	AH64-11316B	KNOB-POWER	L/GRAY(G6236)	
31	AH64-11214C	KNOB-MIC	D/GRAY(G3174)	OPTION
32	AH61-00021A	SUPPORT-PCB	ABS 94HB BLK	
33	AH64-30444A	CABINET-SIDE,L	MIPS M/GRAY	
34	AH64-30445A	CABINET-SIDE,R	MIPS M/GRAY	
35	AH62-32002A	HEAT-SINK,P	AL	
36	AH64-30443A	CABINET-TOP	MIPS M/GRAY	
37	AH64-30416A	CABINET-BOTTOM	SECC 1.0T	
38	AH64-30446E	CABINET-REAR	MIPS M/GRAY	
	AH64-30446F	CABINET-REAR	MIPS M/GRAY	RDS
39	AH61-20540A	HOLDER-TUNER	PC + ABS BLK	

MAX-932/938 EXPLODED VIEW

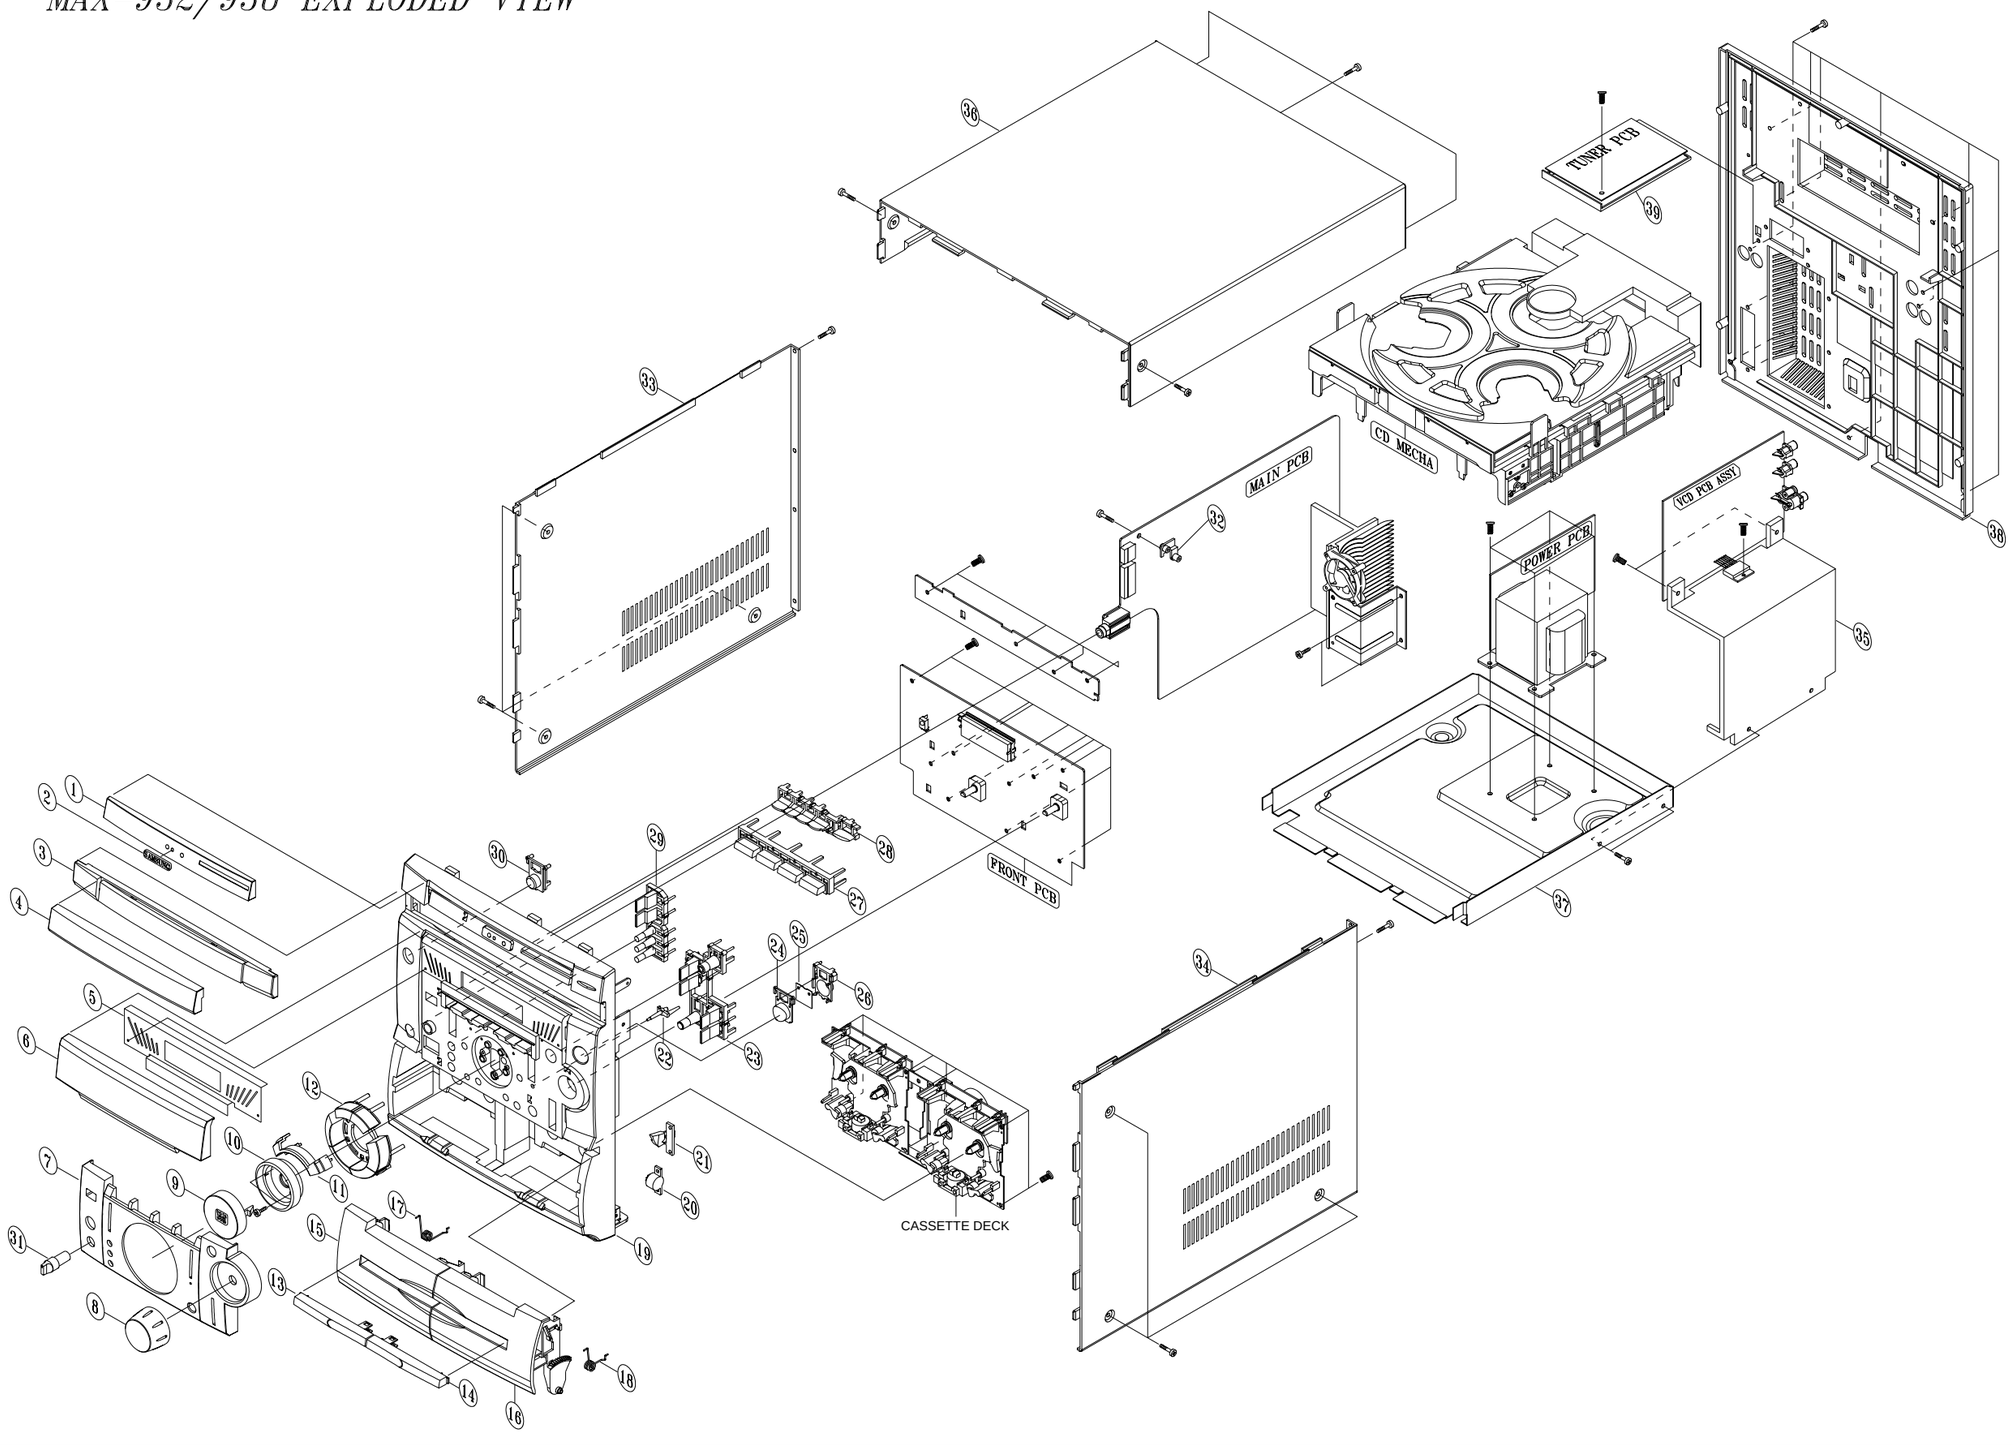

2-3 CD Deck Exploded View and Parts list(COMMON)

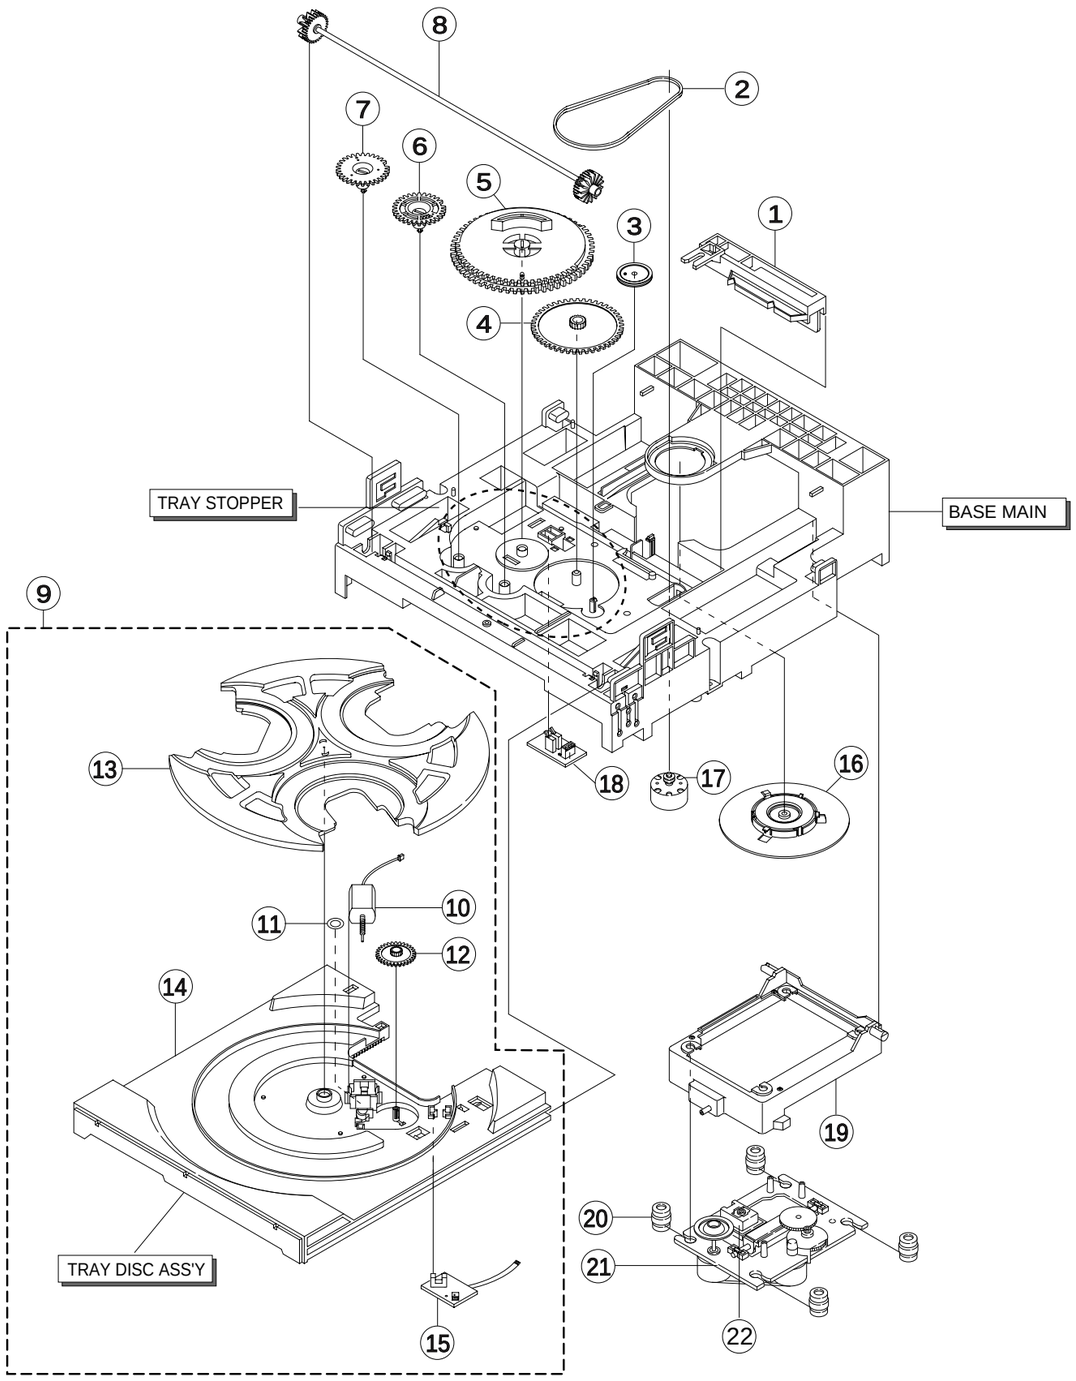

No.	Code No.	Description	Specification	Remarks
1	AH66-80022A	SLIDER-CAM	ABS HF-380 NTR	
2	AH66-60034A	BELT-LOAD	CR	
3	AH66-20186A	GEAR-PULLEY	POM (M90-44) WHT	
4	AH66-20187A	GEAR-LOAD	POM (M90-44) BLK	
5	AH66-20188A	GEAR-CAM	POM (M90-44) WHT	
6	AH66-20189A	GEAR-TRAY	POM (M90-44) BLK	
7	AH66-20190A	GEAR-CONVERT	POM (M90-44) WHT	
8	AH66-20191A	GEAR-SYNCRO	ABS HF-380 NTR	
9	AH59-10097A	ASSY-TRAY DISC	CMS-300,ASS'Y-TRAY	
10	AH59-10098A	ASSY-WORM -MOTOR	CMS-300,ASS'Y-WORM	
11	AH69-20044A	CUSHION-MOTOR	NBR BLK	
12	AH66-20193A	GEAR-ROULETTE	POM (M90-44) BLK	
13	AH66-90056A	TRAY-ROULETTE	ABS XR-401 BLK	
14	AH66-90055A	TRAY-DISC	-,ABS,-,BLK	
15	AH59-10099A	ASSY-PCB SENSOR	CMS-300,ASS'Y SENSOR	
16	AH59-10100A	ASSY-TABLE CHUCK	CMS-300,ASS'Y CHUCK	
17	AH59-10101A	ASSY-PULLEY-MOTOR	CMS-300,ASS'Y CHUCK	
19	AH66-30098A	LEVER-LIFTER	ABS BLK CMS-300	
20	AH73-10035A	RUBBER-CD RED	SI, CMS-300,40,RED	
	AH73-10034A	RUBBER-CD GREEN	SI, CMS-300,40,GREEN	
21	AH91-60150A	DECK-CDP	CMS-D51SG6(U)	

2-4 SPEAKER Exploded View and Parts list

2-4-1 PS920 -- Application Model : MAX909/929/932(P)

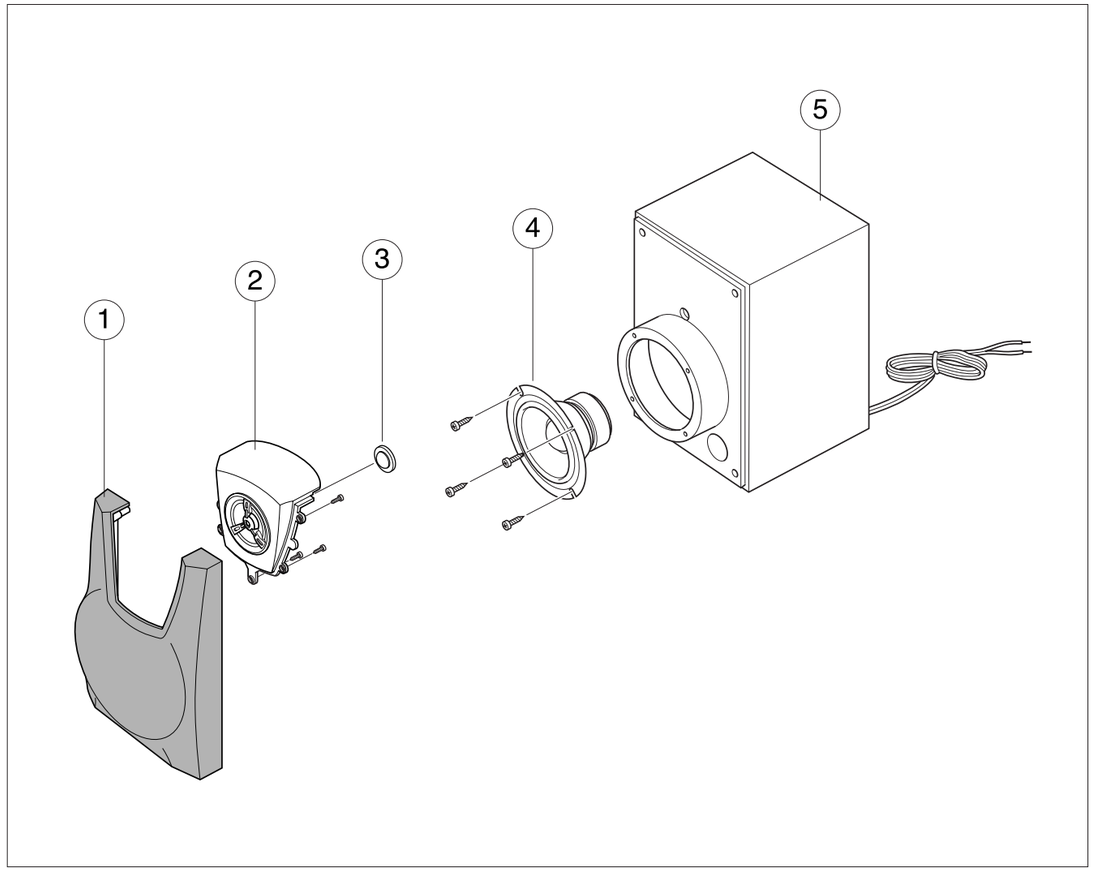

* PS920 : ASS'Y SPEAKER(AH81-00078A)

No.	Description	Specification	Code No.	Q'TY
1	NET	HIPS BLK	AH81-00078E	1
2	PANEL FRONT	HIPS L/GRAY	AH81-00078C	1
3	PIEZO CAP		AH81-00078K	1
4	UNIT W/F	5 1/4″	AH81-00078G	1
5	CABINET ASS'Y		AH81-00078F	1

* CAUSION : It is used the bonding, connet NET FRAME to CABINET ASS'Y.
So when the disassembly, take extreme care not to demage the SPEAKER.

2-4-2 PS930 -- Application Model : MAX910/930/938

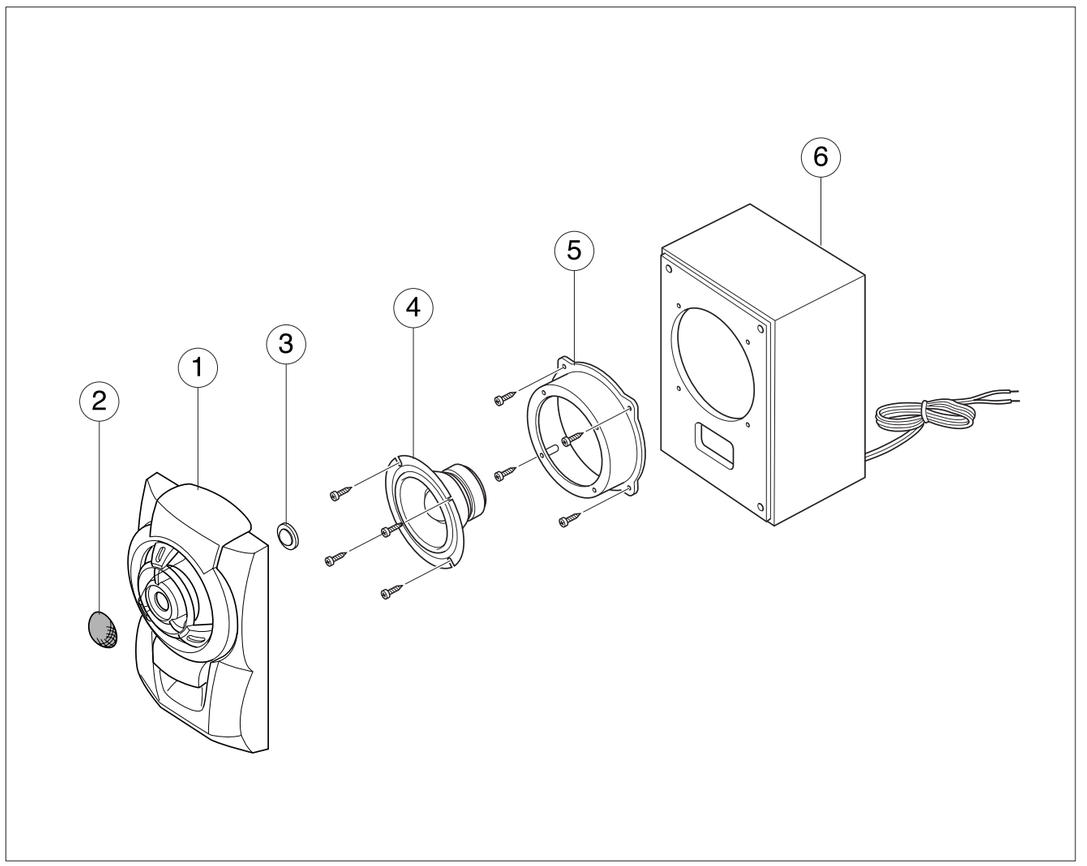

* PS930 : ASS'Y SPEAKER(AH81-00079A)

No.	Description	Specification	Code No.	Q'TY
1	PANEL FRONT	HIPS L/GRAY	AH81-00079C	1
2	PUNCHING GRILLE	EGI	AH81-00079D	1
3	PIEZO CAP		AH81-00079K	1
4	UNIT W/F	5 1/4″	AH81-00079G	1
5	WOOFER RING	HIPS BLK	AH81-00079E	1
6	CABINET ASS'Y		AH81-00079F	1

* CAUSION : It is used the bonding, connet PANEL FRONT to CABINET ASS'Y.
So when the disassembly, take extreme care not to demage the SPEAKER.

2-4-3 PS939 -- Application Model : MAX939

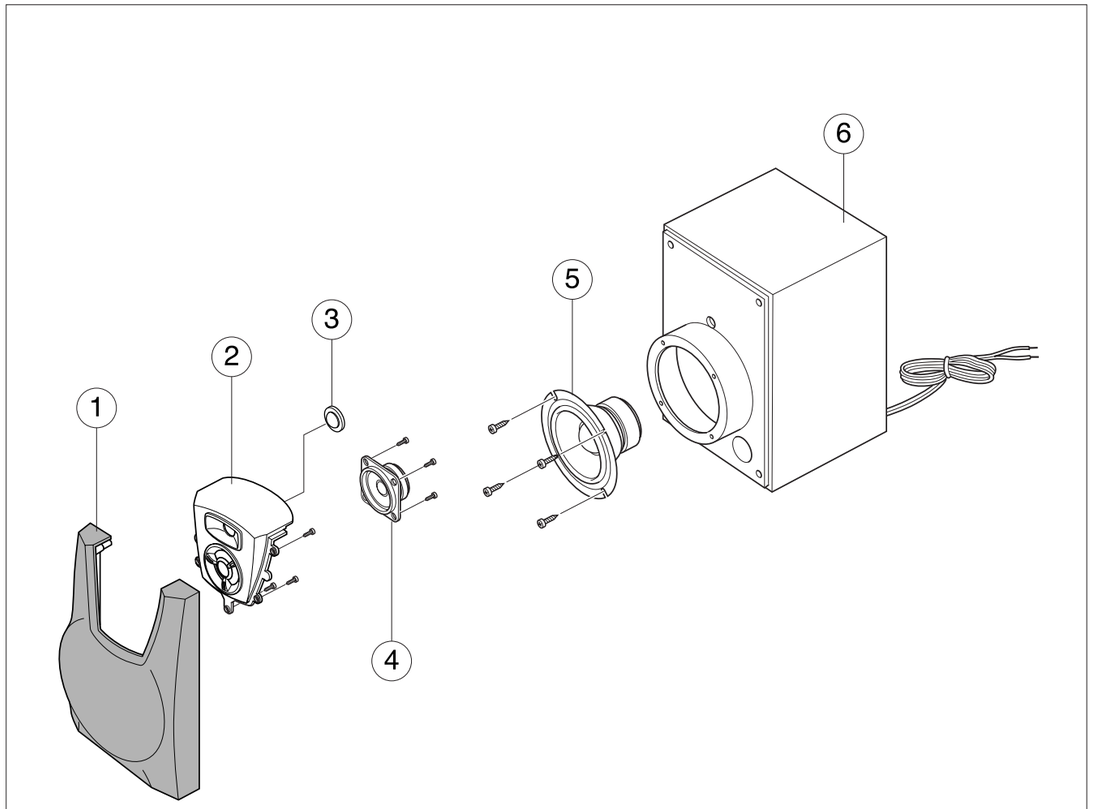

* PS939 : ASS'Y SPEAKER(AH81-00080A)

No.	Description	Specification	Code No.	Q'TY
1	NET FRAME	HIPS BLK	AH81-00080F	1
2	PANEL FRONT	HIPS L/GRAY	AH81-00080C	1
3	PIEZO ASS'Y		AH81-00080Q	1
4	UNIT T/W	2 1/4″	AH81-00080K	1
5	UNIT W/F	5 1/4″	AH81-00080G	1
6	CABINET ASS'Y		AH81-00080E	1

* CAUSION : It is used the bonding, connet NET FRAME to CABINET ASS'Y.
So when the disassembly, take extreme care not to demage the SPEAKER.

2-4-3 PS940 -- Application Model : MAX916/936/940/941

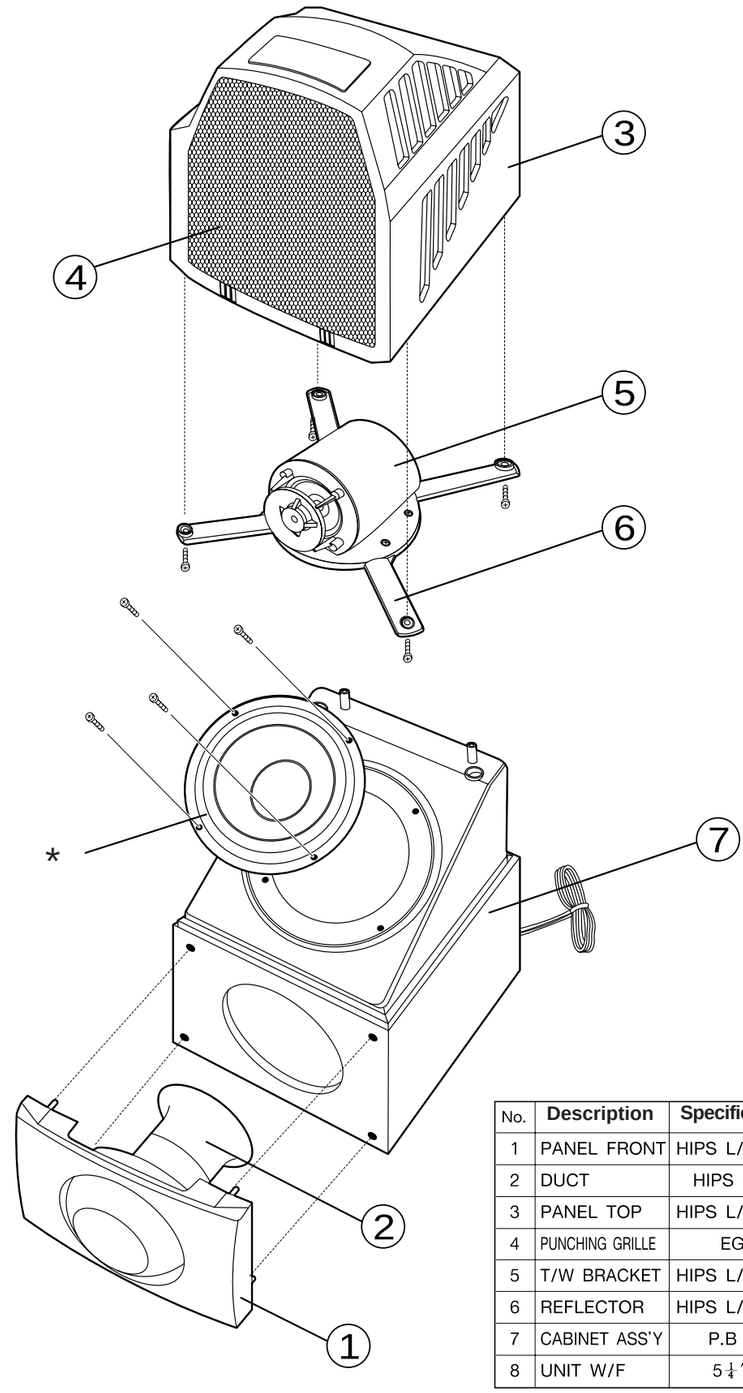

No.	Description	Specification	CODE-NO	Q'TY
1	PANEL FRONT	HIPS L/GRAY	AH81-00081C	1
2	DUCT	HIPS BLK	AH81-00081D	1
3	PANEL TOP	HIPS L/GRAY	AH81-00081E	1
4	PUNCHING GRILLE	EGI	AH81-00081F	1
5	T/W BRACKET	HIPS L/GRAY	AH81-00081G	1
6	REFLECTOR	HIPS L/GRAY	AH81-00081H	1
7	CABINET ASS'Y	P.B 9t	AH81-00081K	1
8	UNIT W/F	5¼″	AH81-00081L	1

3. Electrical Parts List

*S.N.A. : Service Not Available

Location no.	Code no.	Description & Specification	Remarks

**** MAX909/910/916 Parts List ****

	2401-001067	C-AL;3300UF,20%,42V,GP,-,18X35.5,7.	
P/T	AH26-80144M	TRANS-POWER;E174X42,115/230V,60/50HZ,MAX	
	AH59-10124B	REMOCON-ASSY,-,-,BU2478-2Z,22,MAX-810,SAMSU	
	AH90-10752X	**ASSY-PCB-TUNER;MAX900,LW BAND**	**S.N.A.**
VVC1	0405-000137	DIODE-VARACTOR;KV-1260,20V,100NA,T0-92S	
TFL4	14529-304-610	FILTER CERAMIC;AHCM2-450BL	
TX1	2801-000734	CRYSTAL-UNIT;7.2MHZ,50PPM,28-AAM,12PF,30OHM	
RX1	2801-003601	CRYSTAL-UNIT;4.332MHz,30ppm,28-AAM,30pF,	
TFL1	2903-000102	FILTER-CERAMIC;BP,10.7MHZ+-25KHZ,150KHZ+-50KH	
TFL2	2903-000105	FILTER-CERAMIC;BP,10.7MHZ+-25KHZ,180KHZ+-50KH	
TWA1	3710-001421	CONNECTOR-SOCKET;14P,1R,2mm,ANGLE,SN	
TJ2	3711-000814	CONNECTOR-HEADER;BOX,2P,1R,2.5mm,ANGLE,SN	
TJ1	3716-000210	TERMINAL-BLOCK;-,-,-,60V,7A	
HIC1	AH14-10007G	IC;LC72131,DIP,STICK PLL	
TIC1	AH14-10008B	IC;LA1837,DIP,RF+MPX	
TLPF1	AH26-00005A	TRANS-IF;-,LKS75M00-X000264-0,LOW PASS FILTER,-,7	
TLPF2	AH26-00005A	TRANS-IF;-,LKS75M00-X000264-0,LOW PASS FILTER,-,7	
TL2	AH26-10001E	TRANS-IF;KS940228-09,-,-,7.6X12.0,-,450KHZ,BULK,	
TL3	AH26-10020A	TRANS-DET;-,7KLL,DET,-,7.8MM,91PF,11.32M	
LW	AH27-00007A	COIL-OSC;LKS7FB00-0060BLO-0,-,LW OSC	
MW	AH27-00008A	COIL-OSC;LKS75M00-0060LMO-0,-,MW OSC	
LW ANT	AH27-00011A	COIL-OSC;LKS75M00-X000262-0,-,LW ANT	
MW ANT	AH27-00012A	COIL-OSC;LKS75M00-X000263-0,365UH,MW ANT	
FM PACK	AH40-10025S	TUNER-FM;KST-F404VA-1,4G,75ohm	
TP3	AH61-40022A	STUD-TAP;SPC1,T0.5,BT2,-,-,	
TR19	2007-000282	R-CHIP;100KOHM,5%,1/10W,DA,TP,2012	
TR45	2007-000282	R-CHIP;100KOHM,5%,1/10W,DA,TP,2012	
TR47	2007-000282	R-CHIP;100KOHM,5%,1/10W,DA,TP,2012	
TR49	2007-000282	R-CHIP;100KOHM,5%,1/10W,DA,TP,2012	
RR2	2007-000290	R-CHIP;100OHM,5%,1/10W,DA,TP,2012	
TR2	2007-000300	R-CHIP;10KOHM,5%,1/10W,DA,TP,2012	
TR21	2007-000300	R-CHIP;10KOHM,5%,1/10W,DA,TP,2012	
TR22	2007-000300	R-CHIP;10KOHM,5%,1/10W,DA,TP,2012	
TR38	2007-000300	R-CHIP;10KOHM,5%,1/10W,DA,TP,2012	
TR46	2007-000300	R-CHIP;10KOHM,5%,1/10W,DA,TP,2012	
TR48	2007-000300	R-CHIP;10KOHM,5%,1/10W,DA,TP,2012	
TR50	2007-000300	R-CHIP;10KOHM,5%,1/10W,DA,TP,2012	
TR53	2007-000300	R-CHIP;10KOHM,5%,1/10W,DA,TP,2012	
TR54	2007-000300	R-CHIP;10KOHM,5%,1/10W,DA,TP,2012	
TR56	2007-000300	R-CHIP;10KOHM,5%,1/10W,DA,TP,2012	
TR10	2007-000308	R-CHIP;10OHM,5%,1/10W,DA,TP,2012	
TR20	2007-000409	R-CHIP;15KOHM,5%,1/10W,DA,TP,2012	
TR28	2007-000457	R-CHIP;18KOHM,5%,1/10W,DA,TP,2012	
TR37	2007-000457	R-CHIP;18KOHM,5%,1/10W,DA,TP,2012	
RR3	2007-000468	R-CHIP;1KOHM,5%,1/10W,DA,TP,2012	
TR52	2007-000468	R-CHIP;1KOHM,5%,1/10W,DA,TP,2012	
TR9	2007-000468	R-CHIP;1KOHM,5%,1/10W,DA,TP,2012	
TR35	2007-000493	R-CHIP;2.2KOHM,5%,1/10W,DA,TP,2012	
TR36	2007-000493	R-CHIP;2.2KOHM,5%,1/10W,DA,TP,2012	
TR40	2007-000493	R-CHIP;2.2KOHM,5%,1/10W,DA,TP,2012	
TR7	2007-000518	R-CHIP;2.7KOHM,5%,1/10W,DA,TP,2012	
TR11	2007-000572	R-CHIP;220OHM,5%,1/10W,DA,TP,2012	
TR15	2007-000586	R-CHIP;22KOHM,5%,1/10W,DA,TP,2012	
TR12	2007-000686	R-CHIP;3.3KOHM,5%,1/10W,DA,TP,2012	
TR29	2007-000686	R-CHIP;3.3KOHM,5%,1/10W,DA,TP,2012	
TR23	2007-000710	R-CHIP;3.9KOHM,5%,1/10W,DA,TP,2012	
TR8	2007-000822	R-CHIP;390OHM,5%,1/10W,DA,TP,2012	
TR4	2007-000872	R-CHIP;4.7KOHM,5%,1/10W,DA,TP,2012	
TR51	2007-000872	R-CHIP;4.7KOHM,5%,1/10W,DA,TP,2012	
TR17	2007-000981	R-CHIP;5.6KOHM,5%,1/10W,DA,TP,2012	
TR6	2007-001033	R-CHIP;56OHM,5%,1/8W,DA,TP,3216	
TR25	2007-001043	R-CHIP;56OHM,5%,1/10W,DA,TP,2012	
TR27	2007-001071	R-CHIP;6.8KOHM,5%,1/10W,DA,TP,2012	
TR44	2007-001177	R-CHIP;8.2KOHM,5%,1/10W,DA,TP,2012	
TC41	2203-000239	C-CERAMIC,CHIP;100pF,5%,50V,NPO,TP,2012,-	
RC2	2203-000260	C-CERAMIC,CHIP;10nF,10%,50V,X7R,TP,2012,-	
TC28	2203-000260	C-CERAMIC,CHIP;10nF,10%,50V,X7R,TP,2012,-	
TC29	2203-000260	C-CERAMIC,CHIP;10nF,10%,50V,X7R,TP,2012,-	
TC44	2203-000260	C-CERAMIC,CHIP;10nF,10%,50V,X7R,TP,2012,-	
TC7	2203-000429	C-CERAMIC,CHIP;18pF,5%,50V,NPO,TP,2012,-	
TC66	2203-000533	C-CERAMIC,CHIP;2.7nF,10%,50V,X7R,TP,2012,-	
TC1	2203-000609	C-CERAMIC,CHIP;22nF,10%,50V,X7R,TP,2012,-	
TC5	2203-000609	C-CERAMIC,CHIP;22nF,10%,50V,X7R,TP,2012,-	
TC33	2203-000844	C-CERAMIC,CHIP;39nF,10%,50V,X7R,TP,2012,-	
RC7	2203-000979	C-CERAMIC,CHIP;47nF,10%,50V,X7R,TP,2012,-	
TC10	2203-000979	C-CERAMIC,CHIP;47nF,10%,50V,X7R,TP,2012,-	
TC13	2203-000979	C-CERAMIC,CHIP;47nF,10%,50V,X7R,TP,2012,-	
TC15	2203-000979	C-CERAMIC,CHIP;47nF,10%,50V,X7R,TP,2012,-	
TC35	2203-000979	C-CERAMIC,CHIP;47nF,10%,50V,X7R,TP,2012,-	
TC45	2203-000979	C-CERAMIC,CHIP;47nF,10%,50V,X7R,TP,2012,-	
TC6	2203-000979	C-CERAMIC,CHIP;47nF,10%,50V,X7R,TP,2012,-	
RC8	2203-001058	C-CERAMIC,CHIP;560pF,5%,50V,NPO,2012,-,TP	
TC61	2203-001105	C-CERAMIC,CHIP;6.8nF,10%,50V,X7R,TP,2012,-	
TC62	2203-001105	C-CERAMIC,CHIP;6.8nF,10%,50V,X7R,TP,2012,-	
TC32	2203-001132	C-CERAMIC,CHIP;680pF,5%,50V,NPO,2012,-,TP	
TC2	2203-001517	C-CERAMIC,CHIP;15pF,5%,50V,NPO,TP,2012,-	
RC4	2203-001524	C-CERAMIC,CHIP;47pF,5%,50V,NPO,TP,2012,-	
RC5	2203-001524	C-CERAMIC,CHIP;47pF,5%,50V,NPO,TP,2012,-	
TC20	2203-001537	C-CERAMIC,CHIP;1NF,10%,50V,X7R,TP,2012,-	
TC3	2203-001537	C-CERAMIC,CHIP;1NF,10%,50V,X7R,TP,2012,-	
TC63	2203-001551	C-CERAMIC,CHIP;1.5NF,10%,50V,X7R,TP,2012,2MM	
TC64	2203-001551	C-CERAMIC,CHIP;1.5NF,10%,50V,X7R,TP,2012,2MM	
TC50	2203-001611	C-CERAMIC,CHIP;22pF,5%,50V,NPO,TP,2012,2mm	
TC51	2203-001611	C-CERAMIC,CHIP;22pF,5%,50V,NPO,TP,2012,2mm	
RIC1	AH14-10008E	IC;BU1923F,SOP,+5V	
TD3	0401-000101	DIODE-SWITCHING;1N4148,100V,200mA,DO-35,TP	
TD4	0401-000101	DIODE-SWITCHING;1N4148,100V,200mA,DO-35,TP	
TD5	0401-000101	DIODE-SWITCHING;1N4148,100V,200mA,DO-35,TP	
TD6	0401-000101	DIODE-SWITCHING;1N4148,100V,200mA,DO-35,TP	
TZD1	0403-000367	DIODE-ZENER;UZ7.5BSC,7.5V,7.33-7.64V,500mW	
RZD1	0403-000393	DIODE-ZENER;UZP5.1B,5.1V,4.8-5.4V,1W,DO-41	
TZD2	0403-000393	DIODE-ZENER;UZP5.1B,5.1V,4.8-5.4V,1W,DO-41	
TQ4	0501-000294	TR-SMALL SIGNAL;KSA708-Y,PNP,800mW,TO-92,TP,12	
TQ2	0501-000392	TR-SMALL SIGNAL;KSC838-O,NPN,250mW,TO-92,-,70-	
TQ3	0501-000392	TR-SMALL SIGNAL;KSC838-O,NPN,250mW,TO-92,-,70-	
TQ1	0501-000398	TR-SMALL SIGNAL;KSC945,NPN,250mW,TO-92,TP,120-	
TQ5	0501-000398	TR-SMALL SIGNAL;KSC945,NPN,250mW,TO-92,TP,120-	
TQ6	0501-000398	TR-SMALL SIGNAL;KSC945,NPN,250mW,TO-92,TP,120-	
TQ7	0501-000398	TR-SMALL SIGNAL;KSC945,NPN,250mW,TO-92,TP,120-	
TR30	2001-000117	R-CARBON(S);68ohm,5%,1/2W,AA,TP,2.4x6.4mm	
RR1	2001-000118	R-CARBON(S);180ohm,5%,1/2W,AA,TP,2.4x6.4mm	
TR44	2001-000118	R-CARBON(S);180ohm,5%,1/2W,AA,TP,2.4x6.4mm	
TR58	2001-000273	R-CARBON;100KOHM,5%,1/8W,AA,TP,-	
TR5	2001-000281	R-CARBON;100ohm,5%,1/8W,AA,TP,1.8x3.2mm	
TR39	2001-000290	R-CARBON;10KOHM,5%,1/8W,AA,TP,-	
TR57	2001-000290	R-CARBON;10KOHM,5%,1/8W,AA,TP,-	
TR1	2001-000331	R-CARBON;12KOHM,5%,1/8W,AA,TP,-	
RR3	2001-000429	R-CARBON;1KOHM,5%,1/8W,AA,TP,-	
RR4	2001-000429	R-CARBON;1KOHM,5%,1/8W,AA,TP,-	
RR5	2001-000429	R-CARBON;1KOHM,5%,1/8W,AA,TP,-	
TR55	2001-000429	R-CARBON;1KOHM,5%,1/8W,AA,TP,-	
TR18	2001-000449	R-CARBON;2.2Kohm,5%,1/8W,AA,TP,1.8x3.2m	
TR3	2001-000449	R-CARBON;2.2Kohm,5%,1/8W,AA,TP,1.8x3.2m	
TR13	2001-000515	R-CARBON;220ohm,5%,1/8W,AA,TP,1.8x3.2mm	
TR40	2001-000522	R-CARBON;22Kohm,5%,1/8W,AA,TP,1.8x3.2mm	
TR41	2001-000522	R-CARBON;22Kohm,5%,1/8W,AA,TP,1.8x3.2mm	
TR16	2001-000527	R-CARBON;22ohm,5%,1/8W,AA,TP,1.8x3.2mm	
TR32	2001-000591	R-CARBON;3.3KOHM,5%,1/8W,AA,TP,-	
TR34	2001-000591	R-CARBON;3.3KOHM,5%,1/8W,AA,TP,-	
TR61	2001-000591	R-CARBON;3.3KOHM,5%,1/8W,AA,TP,-	
TR62	2001-000591	R-CARBON;3.3KOHM,5%,1/8W,AA,TP,-	
TR42	2001-000734	R-CARBON;4.7KOHM,5%,1/8W,AA,TP,-	
TSR1	2103-000171	VR-SEMI;10KOHM,30%,1/10W,TOP	
TC14	2201-000565	C-CERAMIC,DISC;47nF,20%,50V,Y5V,12.5x4.0mm,5mm,TP	
TC39	2201-000565	C-CERAMIC,DISC;47nF,20%,50V,Y5V,12.5x4.0mm,5mm,TP	
RC9	2202-000796	C-CERAMIC,MLC-AXIAL;1nF,10%,50V,Y5P,TP,3.5x19,-	
TC40	2202-000796	C-CERAMIC,MLC-AXIAL;1nF,10%,50V,Y5P,TP,3.5x19,-	
TC42	2202-000796	C-CERAMIC,MLC-AXIAL;1nF,10%,50V,Y5P,TP,3.5x19,-	
TC21	2401-000244	C-AL;100uF,20%,10V,GP,TP,6.3x7,5	
TC46	2401-000244	C-AL;100uF,20%,10V,GP,TP,6.3x7,5	
TC12	2401-000419	C-AL;10UF,20%,16V,GP,-,4X7,5	
TC26	2401-000419	C-AL;10UF,20%,16V,GP,-,4X7,5	
TC27	2401-000419	C-AL;10UF,20%,16V,GP,-,4X7,5	
TC30	2401-000419	C-AL;10UF,20%,16V,GP,-,4X7,5	
RC1	2401-000907	C-AL;22UF,20%,16V,GP,-,5X11,2MM	
TC34	2401-000907	C-AL;22UF,20%,16V,GP,-,5X11,2MM	
TC36	2401-001022	C-AL;3.3UF,20%,50V,GP,-,5X11,2MM	
TC38	2401-001164	C-AL;33UF,20%,16V,GP,-,5X11,2MM	
TC47	2401-001893	C-AL;100UF,20%,16V,GP,TP,6.3X7MM,5	
TC11	2401-001912	C-AL;1uF,20%,50V,GP,5x11mm,2mm,BK	
TC17	2401-001912	C-AL;1uF,20%,50V,GP,5x11mm,2mm,BK	
TC19	2401-001912	C-AL;1uF,20%,50V,GP,5x11mm,2mm,BK	
TC16	2401-001954	C-AL;4.7UF,20%,50V,GP,BK,5X11MM,5	
TC23	2401-001954	C-AL;4.7UF,20%,50V,GP,BK,5X11MM,5	
TC25	2401-001954	C-AL;4.7UF,20%,50V,GP,BK,5X11MM,5	
TC18	2401-001968	C-AL;470NF,20%,50V,GP,TP,5X11MM,5	
TC43	2401-001968	C-AL;470NF,20%,50V,GP,TP,5X11MM,5	
TC4	2401-001975	C-AL;47UF,20%,16V,GP,TP,5X11MM,5	
TC9	2401-001975	C-AL;47UF,20%,16V,GP,TP,5X11MM,5	
RC6	2401-002180	C-AL;2.2UF,20%,50V,GP,TP,5X11,5MM	
	AH90-10754G	**ASSY-MAIN COM PCB;MAX910**	**S.N.A.**
PBD1	0402-001258	DIODE-BRIDGE;GBU606,600V,6A,SIP-4,BK	
AQ17	0502-000303	TR-POWER;KSD882,NPN,1W,TO-126,TP,160-32	
AQ18	0502-000303	TR-POWER;KSD882,NPN,1W,TO-126,TP,160-32	
PQ7	0502-000407	TR-POWER;KTC4369Y,NPN,15W,TO-220,BK,120	
AQ11	0503-001013	TR-DARLINGTON;2SD2494,NPN,60W,T0-3P,BK,5	
AQ9	0503-001013	TR-DARLINGTON;2SD2494,NPN,60W,T0-3P,BK,5	
PQ1	0503-001013	TR-DARLINGTON;2SD2494,NPN,60W,T0-3P,BK,5	

Location no.	Code no.	Description & Specifiation	Remarks
FREE	0503-001014	TR-DARLINGTON;2SD2495,NPN,60W,T0-3P,BK,5	
AQ10	0503-001015	TR-DARLINGTON;2SB1625,60W,TO-3P,BK,5000-	
AQ8	0503-001015	TR-DARLINGTON;2SB1625,60W,TO-3P,BK,5000-	
DIC1	1201-000358	IC-PREAMP;22291,DIP,24P-,DUAL,-,PLASTIC	
	1203-000300	IC-POSI.FIXED REG.;7810,TO-220,3P-,PLASTIC,9.6/1	
FIC4	1204-001465	IC-VOLUME/TONE CONT.;TDA7440D,SOP,28,18.	
	13954-500-210	CERAMIC-PIPE;PI1.4 7MM	
AR1	2003-000390	R-METAL OXIDE(S);0.27OHM,5%,2W,AA,TP,4X12MM	
AR2	2003-000390	R-METAL OXIDE(S);0.27OHM,5%,2W,AA,TP,4X12MM	
AR24	2003-000390	R-METAL OXIDE(S);0.27OHM,5%,2W,AA,TP,4X12MM	
AR25	2003-000390	R-METAL OXIDE(S);0.27OHM,5%,2W,AA,TP,4X12MM	
	2003-000429	R-METAL OXIDE(S);1.5Kohm,5%,2W,AA,TP,4x12mm	
PZ07	2003-000690	R-METAL OXIDE(S);4.7ohm,5%,2W,AA,TP,4x12mm	
	2201-000546	C-CERAMIC,DISC;4.7NF,20%,400V,Y5U,BK,16X7,10	
PC1	2401-001943	C-AL;3300UF,20%,50V,GP,BK,25X40MM,1	
PC2	2401-001943	C-AL;3300UF,20%,50V,GP,BK,25X40MM,1	
RF1	3601-000207	FUSE-FERRULE;250V,1A,TL,GLASS,5x20mm	
	3711-000190	CONNECTOR-HEADER;1WALL,2P,1R,7.92MM,STRAIGHT,SN	
DCW3	3711-000733	CONNECTOR-HEADER;BOX,17P,1R,2.5MM,STRAIGHT,SN	
ACW1	3711-000820	CONNECTOR-HEADER;BOX,2P,1R,2.5mm,STRAIGHT,SN	
FCW1	3711-002809	CONNECTOR-HEADER;BOX,8P,1R,2mm,STRAIGHT,SN	
CCW2	3711-003097	CONNECTOR-HEADER;NOWALL,10P,1R,1.25MM,ANGLE,SN	
CCW1	3711-003104	CONNECTOR-HEADER;NOWALL,22P,1R,1.25MM,ANGLE,SN	
DCW4	3711-003107	CONNECTOR-HEADER;BOX,3P,1R,2.5mm,STRAIGHT,SN	
PCW2	3711-003111	CONNECTOR-HEADER;BOX,6P,1R,2.5mm,-,BRAS	
FCW2	3711-004109	CONNECTOR-HEADER;3WALL,14P,1R,2mm,STRAIGHT,SN	
AJACK1	3716-000209	TERMINAL-BLOCK;,-,-,60V,7A	
HJACK1	3722-000363	JACK-PHONE;9P,6.4MM,AU,BLK,-	
AJACK2	3722-000377	JACK-RCA;4P/2C,3.5MM,SN,BLK,#16~22	
FJACK	3722-000377	JACK-RCA;4P/2C,3.5MM,SN,BLK,#16~22	
AL3	AH26-10002G	TRANS-IF;IODT-N5002,BIAS-OSC,3.7MH,7.6X12.0,L6/10	
DL4	AH26-10002G	TRANS-IF;IODT-N5002,BIAS-OSC,3.7MH,7.6X12.0,L6/10	
DL1	AH26-10002Y	COIL-TRAP;FB875-85A,BIAS-TRAP,35DB,8.0,180PF,85KHZ	
DL2	AH26-10002Y	COIL-TRAP;FB875-85A,BIAS-TRAP,35DB,8.0,180PF,85KHZ	
RL1	AH27-10001F	COIL-CHOKE;27UH,K,Q30,-,-,DR(6.5*7.5),-,-,	
RL2	AH27-10001F	COIL-CHOKE;27UH,K,Q30,-,-,DR(6.5*7.5),-,-,	
FAN	AH31-10020A	FAN-DC;D0620B-12M,12VDC/0.16A,	
	AH39-00018A	LEAD-CONNECTOR ASSY;-,5264,51088,6P,300MM,1007#22	
	AH39-50001L	LEAD-FASTEN;RING,1007#24,200MM,BLK	
AD1	0401-000101	DIODE-SWITCHING;1N4148,100V,200mA,DO-35,TP	
AD2	0401-000101	DIODE-SWITCHING;1N4148,100V,200mA,DO-35,TP	
AD3	0401-000101	DIODE-SWITCHING;1N4148,100V,200mA,DO-35,TP	
AD4	0401-000101	DIODE-SWITCHING;1N4148,100V,200mA,DO-35,TP	
AD5	0401-000101	DIODE-SWITCHING;1N4148,100V,200mA,DO-35,TP	
DD1	0401-000101	DIODE-SWITCHING;1N4148,100V,200mA,DO-35,TP	
DD2	0401-000101	DIODE-SWITCHING;1N4148,100V,200mA,DO-35,TP	
DD3	0401-000101	DIODE-SWITCHING;1N4148,100V,200mA,DO-35,TP	
DD4	0401-000101	DIODE-SWITCHING;1N4148,100V,200mA,DO-35,TP	
DD5	0401-000101	DIODE-SWITCHING;1N4148,100V,200mA,DO-35,TP	
DD6	0401-000101	DIODE-SWITCHING;1N4148,100V,200mA,DO-35,TP	
FD2	0401-000101	DIODE-SWITCHING;1N4148,100V,200mA,DO-35,TP	
PD3	0401-000101	DIODE-SWITCHING;1N4148,100V,200mA,DO-35,TP	
PD7	0401-000101	DIODE-SWITCHING;1N4148,100V,200mA,DO-35,TP	
PD2	0402-000127	DIODE-RECTIFIER;1N4002,100V,1A,DO-41,TP	
PD4	0402-000127	DIODE-RECTIFIER;1N4002,100V,1A,DO-41,TP	
PD5	0402-000127	DIODE-RECTIFIER;1N4002,100V,1A,DO-41,TP	
PD6	0402-000151	DIODE-RECTIFIER;1N5392,100V,1.5A,DO-15,TP	
EZD1	0403-000354	DIODE-ZENER;UZ5.1B,5.1V,4.8-5.4V,500mW,DO-	
PZD5	0403-000354	DIODE-ZENER;UZ5.1B,5.1V,4.8-5.4V,500mW,DO-	
PZD9	0403-000354	DIODE-ZENER;UZ5.1B,5.1V,4.8-5.4V,500mW,DO-	
PZD4	0403-000377	DIODE-ZENER;UZP10B,10V,9.4-10.6V,1W,DO-41,	
PZD6	0403-000377	DIODE-ZENER;UZP10B,10V,9.4-10.6V,1W,DO-41,	
PZD7	0403-000379	DIODE-ZENER;UZP12B,12V,11.4-12.6V,1W,DO-41	
PZD8	0403-000379	DIODE-ZENER;UZP12B,12V,11.4-12.6V,1W,DO-41	
DQ22	0501-000010	TR-SMALL SIGNAL;KSC1008,NPN,800mW,TO-92,TP,120	
DQ7	0501-000010	TR-SMALL SIGNAL;KSC1008,NPN,800mW,TO-92,TP,120	
DQ8	0501-000010	TR-SMALL SIGNAL;KSC1008,NPN,800mW,TO-92,TP,120	
DQ9	0501-000010	TR-SMALL SIGNAL;KSC1008,NPN,800mW,TO-92,TP,120	
FQ4	0501-000010	TR-SMALL SIGNAL;KSC1008,NPN,800mW,TO-92,TP,120	
PQ3	0501-000010	TR-SMALL SIGNAL;KSC1008,NPN,800mW,TO-92,TP,120	
PQ5	0501-000010	TR-SMALL SIGNAL;KSC1008,NPN,800mW,TO-92,TP,120	
PQ6	0501-000010	TR-SMALL SIGNAL;KSC1008,NPN,800mW,TO-92,TP,120	
AQ12	0501-000294	TR-SMALL SIGNAL;KSA708-Y,PNP,800mW,TO-92,TP,12	
AQ4	0501-000294	TR-SMALL SIGNAL;KSA708-Y,PNP,800mW,TO-92,TP,12	
DQ16	0501-000294	TR-SMALL SIGNAL;KSA708-Y,PNP,800mW,TO-92,TP,12	
PQ10	0501-000294	TR-SMALL SIGNAL;KSA708-Y,PNP,800mW,TO-92,TP,12	
PQ8	0501-000294	TR-SMALL SIGNAL;KSA708-Y,PNP,800mW,TO-92,TP,12	
AQ22	0501-000296	TR-SMALL SIGNAL;KSA709-Y,PNP,800mW,TO-92,TP,12	
-	0501-000331	TR-SMALL SIGNAL;KSC1009-Y,NPN,800mW,TO-92,-,12	
PQ17	0501-000331	TR-SMALL SIGNAL;KSC1009-Y,NPN,800mW,TO-92,-,12	
AQ19	0501-000354	TR-SMALL SIGNAL;KSC1845-F,NPN,500MW,TO-92,TP,3	
AQ2	0501-000354	TR-SMALL SIGNAL;KSC1845-F,NPN,500MW,TO-92,TP,3	
AQ20	0501-000354	TR-SMALL SIGNAL;KSC1845-F,NPN,500MW,TO-92,TP,3	
AQ3	0501-000354	TR-SMALL SIGNAL;KSC1845-F,NPN,500MW,TO-92,TP,3	
DQ5	0501-000369	TR-SMALL SIGNAL;KSC2331-Y,NPN,1W,TO-92L,-,120-	
PQ4	0501-000369	TR-SMALL SIGNAL;KSC2331-Y,NPN,1W,TO-92L,-,120-	
-	0501-000398	TR-SMALL SIGNAL;KSC945,NPN,250mW,TO-92,TP,120-	
AQ1	0501-000398	TR-SMALL SIGNAL;KSC945,NPN,250mW,TO-92,TP,120-	
AQ16	0501-000398	TR-SMALL SIGNAL;KSC945,NPN,250mW,TO-92,TP,120-	
DQ13	0501-000398	TR-SMALL SIGNAL;KSC945,NPN,250mW,TO-92,TP,120-	
DQ19	0501-000398	TR-SMALL SIGNAL;KSC945,NPN,250mW,TO-92,TP,120-	
DQ20	0501-000398	TR-SMALL SIGNAL;KSC945,NPN,250mW,TO-92,TP,120-	
DQ21	0501-000398	TR-SMALL SIGNAL;KSC945,NPN,250mW,TO-92,TP,120-	
DQ6	0501-000398	TR-SMALL SIGNAL;KSC945,NPN,250mW,TO-92,TP,120-	

Location no.	Code no.	Description & Specifiation	Remarks
EQ1	0501-000398	TR-SMALL SIGNAL;KSC945,NPN,250mW,TO-92,TP,120-	
AQ13	0501-000407	TR-SMALL SIGNAL;KSD471A-Y,NPN,800MW,TO-92,-,12	
AQ15	0501-000407	TR-SMALL SIGNAL;KSD471A-Y,NPN,800MW,TO-92,-,12	
AQ5	0501-000407	TR-SMALL SIGNAL;KSD471A-Y,NPN,800MW,TO-92,-,12	
AQ7	0501-000407	TR-SMALL SIGNAL;KSD471A-Y,NPN,800MW,TO-92,-,12	
DQ3	0501-000407	TR-SMALL SIGNAL;KSD471A-Y,NPN,800MW,TO-92,-,12	
DQ12	0501-000610	TR-SMALL SIGNAL;KSA928A-Y,PNP,1W,TO-92L,TP,160	
DQ4	0501-000610	TR-SMALL SIGNAL;KSA928A-Y,PNP,1W,TO-92L,TP,160	
PQ11	0501-000610	TR-SMALL SIGNAL;KSA928A-Y,PNP,1W,TO-92L,TP,160	
PQ15	0501-000610	TR-SMALL SIGNAL;KSA928A-Y,PNP,1W,TO-92L,TP,160	
AQ14	0501-002188	TR-SMALL SIGNAL;KSA992,PNP,500mW,TO-92,T	
AQ6	0501-002188	TR-SMALL SIGNAL;KSA992,PNP,500mW,TO-92,T	
DQ11	0504-000118	TR-DIGITAL;KSR1003,NPN,300mW,22K-22K,TO-9	
DQ15	0504-000118	TR-DIGITAL;KSR1003,NPN,300mW,22K-22K,TO-9	
DQ18	0504-000118	TR-DIGITAL;KSR1003,NPN,300mW,22K-22K,TO-9	
FQ7	0504-000118	TR-DIGITAL;KSR1003,NPN,300mW,22K-22K,TO-9	
FQ8	0504-000118	TR-DIGITAL;KSR1003,NPN,300mW,22K-22K,TO-9	
PQ13	0504-000118	TR-DIGITAL;KSR1003,NPN,300mW,22K-22K,TO-9	
PQ9	0504-000118	TR-DIGITAL;KSR1003,NPN,300mW,22K-22K,TO-9	
AQ21	0504-000122	TR-DIGITAL;KSR1009Y,NPN,300mW,4.7K,TO-92,	
DQ17	0504-000122	TR-DIGITAL;KSR1009Y,NPN,300mW,4.7K,TO-92,	
FQ2	0504-000122	TR-DIGITAL;KSR1009Y,NPN,300mW,4.7K,TO-92,	
FQ3	0504-000122	TR-DIGITAL;KSR1009Y,NPN,300mW,4.7K,TO-92,	
PQ18	0504-000122	TR-DIGITAL;KSR1009Y,NPN,300mW,4.7K,TO-92,	
DQ1	0504-001003	TR-DIGITAL;KSR2003,PNP,300MW,22K-22K,TO-9	
DQ10	0504-001003	TR-DIGITAL;KSR2003,PNP,300MW,22K-22K,TO-9	
DQ14	0504-001003	TR-DIGITAL;KSR2003,PNP,300MW,22K-22K,TO-9	
DQ2	0504-001003	TR-DIGITAL;KSR2003,PNP,300MW,22K-22K,TO-9	
FQ1	0504-001003	TR-DIGITAL;KSR2003,PNP,300MW,22K-22K,TO-9	
FQ5	0504-001003	TR-DIGITAL;KSR2003,PNP,300MW,22K-22K,TO-9	
FQ6	0504-001003	TR-DIGITAL;KSR2003,PNP,300MW,22K-22K,TO-9	
PQ14	0504-001003	TR-DIGITAL;KSR2003,PNP,300MW,22K-22K,TO-9	
PQ16	0504-001003	TR-DIGITAL;KSR2003,PNP,300MW,22K-22K,TO-9	
FIC3	1001-001065	IC-ANALOG SWITCH;NJU4066BM,CMOS,DMP,14P,	
-	1201-000163	IC-OP AMP;BA4560F-E2	
FIC1	1201-000163	IC-OP AMP;BA4560F-E2	
FIC5	1201-000163	IC-OP AMP;BA4560F-E2	
AR30	2001-000003	R-CARBON;330ohm,5%,1/8W,AA,TP,1.8x3.2mm	
AR8	2001-000003	R-CARBON;330ohm,5%,1/8W,AA,TP,1.8x3.2mm	
DR13	2001-000003	R-CARBON;330ohm,5%,1/8W,AA,TP,1.8x3.2mm	
DR52	2001-000003	R-CARBON;330ohm,5%,1/8W,AA,TP,1.8x3.2mm	
DR34	2001-000008	R-CARBON;15Kohm,5%,1/8W,AA,TP,1.8x3.2mm	
DR55	2001-000008	R-CARBON;15Kohm,5%,1/8W,AA,TP,1.8x3.2mm	
DR6	2001-000008	R-CARBON;15Kohm,5%,1/8W,AA,TP,1.8x3.2mm	
FR37	2001-000008	R-CARBON;15Kohm,5%,1/8W,AA,TP,1.8x3.2mm	
FR40	2001-000008	R-CARBON;15Kohm,5%,1/8W,AA,TP,1.8x3.2mm	
DR8	2001-000010	R-CARBON;68Kohm,5%,1/8W,AA,TP,1.8x3.2mm	
-	2001-000019	R-CARBON(S);10ohm,5%,1/2W,AA,TP,2.4x6.4mm	
PR14	2001-000019	R-CARBON(S);10ohm,5%,1/2W,AA,TP,2.4x6.4mm	
AR11	2001-000028	R-CARBON(S);100OHM,5%,1/2W,AA,TP,-	
AR28	2001-000028	R-CARBON(S);100OHM,5%,1/2W,AA,TP,-	
AR33	2001-000028	R-CARBON(S);100OHM,5%,1/2W,AA,TP,-	
AR5	2001-000028	R-CARBON(S);100OHM,5%,1/2W,AA,TP,-	
PR14	2001-000028	R-CARBON(S);100OHM,5%,1/2W,AA,TP,-	
	2001-000050	R-CARBON;2.7KOHM,5%,1/4W,AA,TP,-	
AR44	2001-000109	R-CARBON(S);470ohm,5%,1/2W,AA,TP,2.4x6.4mm	
AR45	2001-000109	R-CARBON(S);470ohm,5%,1/2W,AA,TP,2.4x6.4mm	
PR25	2001-000109	R-CARBON(S);470ohm,5%,1/2W,AA,TP,2.4x6.4mm	
PR16	2001-000117	R-CARBON(S);68ohm,5%,1/2W,AA,TP,2.4x6.4mm	
AR22	2001-000221	R-CARBON;1.2KOHM,5%,1/8W,AA,TP,-	
AR42	2001-000221	R-CARBON;1.2KOHM,5%,1/8W,AA,TP,-	
DR36	2001-000241	R-CARBON;1.5Kohm,5%,1/8W,AA,TP,1.8x3.2m	
FR19	2001-000241	R-CARBON;1.5Kohm,5%,1/8W,AA,TP,1.8x3.2m	
FR20	2001-000241	R-CARBON;1.5Kohm,5%,1/8W,AA,TP,1.8x3.2m	
FR21	2001-000241	R-CARBON;1.5Kohm,5%,1/8W,AA,TP,1.8x3.2m	
FR24	2001-000241	R-CARBON;1.5Kohm,5%,1/8W,AA,TP,1.8x3.2m	
PR28	2001-000241	R-CARBON;1.5Kohm,5%,1/8W,AA,TP,1.8x3.2m	
DR3	2001-000258	R-CARBON;1.8KOHM,5%,1/8W,AA,TP,-	
DR59	2001-000258	R-CARBON;1.8KOHM,5%,1/8W,AA,TP,-	
FR35	2001-000258	R-CARBON;1.8KOHM,5%,1/8W,AA,TP,-	
FR36	2001-000258	R-CARBON;1.8KOHM,5%,1/8W,AA,TP,-	
AR15	2001-000273	R-CARBON;100KOHM,5%,1/8W,AA,TP,-	
AR40	2001-000273	R-CARBON;100KOHM,5%,1/8W,AA,TP,-	
DR9	2001-000273	R-CARBON;100KOHM,5%,1/8W,AA,TP,-	
FR53	2001-000273	R-CARBON;100KOHM,5%,1/8W,AA,TP,-	
PR37	2001-000273	R-CARBON;100KOHM,5%,1/8W,AA,TP,-	
SR3	2001-000273	R-CARBON;100KOHM,5%,1/8W,AA,TP,-	
AR16	2001-000281	R-CARBON;100ohm,5%,1/8W,AA,TP,1.8x3.2mm	
AR47	2001-000281	R-CARBON;100ohm,5%,1/8W,AA,TP,1.8x3.2mm	
AR49	2001-000281	R-CARBON;100ohm,5%,1/8W,AA,TP,1.8x3.2mm	
CR1	2001-000281	R-CARBON;100ohm,5%,1/8W,AA,TP,1.8x3.2mm	
CR2	2001-000281	R-CARBON;100ohm,5%,1/8W,AA,TP,1.8x3.2mm	
CR3	2001-000281	R-CARBON;100ohm,5%,1/8W,AA,TP,1.8x3.2mm	
FR30	2001-000281	R-CARBON;100ohm,5%,1/8W,AA,TP,1.8x3.2mm	
FR31	2001-000281	R-CARBON;100ohm,5%,1/8W,AA,TP,1.8x3.2mm	
FR50	2001-000281	R-CARBON;100ohm,5%,1/8W,AA,TP,1.8x3.2mm	
AR52	2001-000290	R-CARBON;10KOHM,5%,1/8W,AA,TP,-	
AR53	2001-000290	R-CARBON;10KOHM,5%,1/8W,AA,TP,-	
DD7	2001-000290	R-CARBON;10KOHM,5%,1/8W,AA,TP,-	
DR15	2001-000290	R-CARBON;10KOHM,5%,1/8W,AA,TP,-	
DR48	2001-000290	R-CARBON;10KOHM,5%,1/8W,AA,TP,-	
DR49	2001-000290	R-CARBON;10KOHM,5%,1/8W,AA,TP,-	
DR50	2001-000290	R-CARBON;10KOHM,5%,1/8W,AA,TP,-	
DR68	2001-000290	R-CARBON;10KOHM,5%,1/8W,AA,TP,-	

Location no.	Code no.	Description & Specification	Remarks
ER11	2001-000290	R-CARBON;10KOHM,5%,1/8W,AA,TP,-	
ER3	2001-000290	R-CARBON;10KOHM,5%,1/8W,AA,TP,-	
ER4	2001-000290	R-CARBON;10KOHM,5%,1/8W,AA,TP,-	
FR10	2001-000290	R-CARBON;10KOHM,5%,1/8W,AA,TP,-	
FR2	2001-000290	R-CARBON;10KOHM,5%,1/8W,AA,TP,-	
FR25	2001-000290	R-CARBON;10KOHM,5%,1/8W,AA,TP,-	
FR26	2001-000290	R-CARBON;10KOHM,5%,1/8W,AA,TP,-	
FR27	2001-000290	R-CARBON;10KOHM,5%,1/8W,AA,TP,-	
FR34	2001-000290	R-CARBON;10KOHM,5%,1/8W,AA,TP,-	
FR4	2001-000290	R-CARBON;10KOHM,5%,1/8W,AA,TP,-	
FR51	2001-000290	R-CARBON;10KOHM,5%,1/8W,AA,TP,-	
FR9	2001-000290	R-CARBON;10KOHM,5%,1/8W,AA,TP,-	
JI8	2001-000290	R-CARBON;10KOHM,5%,1/8W,AA,TP,-	
PR11	2001-000290	R-CARBON;10KOHM,5%,1/8W,AA,TP,-	
PR12	2001-000290	R-CARBON;10KOHM,5%,1/8W,AA,TP,-	
PR15	2001-000290	R-CARBON;10KOHM,5%,1/8W,AA,TP,-	
PR18	2001-000290	R-CARBON;10KOHM,5%,1/8W,AA,TP,-	
PR36	2001-000290	R-CARBON;10KOHM,5%,1/8W,AA,TP,-	
PR7	2001-000290	R-CARBON;10KOHM,5%,1/8W,AA,TP,-	
DR35	2001-000302	R-CARBON;10ohm,5%,1/8W,AA,TP,1.8x3.2mm	
AR21	2001-000331	R-CARBON;12KOHM,5%,1/8W,AA,TP,-	
DR12	2001-000331	R-CARBON;12KOHM,5%,1/8W,AA,TP,-	
DR34	2001-000331	R-CARBON;12KOHM,5%,1/8W,AA,TP,-	
DR72	2001-000331	R-CARBON;12KOHM,5%,1/8W,AA,TP,-	
FR15	2001-000331	R-CARBON;12KOHM,5%,1/8W,AA,TP,-	
FR17	2001-000331	R-CARBON;12KOHM,5%,1/8W,AA,TP,-	
PR10	2001-000331	R-CARBON;12KOHM,5%,1/8W,AA,TP,-	
DR19	2001-000397	R-CARBON;180Kohm,5%,1/8W,AA,TP,1.8x3.2m	
DR73	2001-000397	R-CARBON;180Kohm,5%,1/8W,AA,TP,1.8x3.2m	
-	2001-000411	R-CARBON;18KOHM,5%,1/8W,AA,TP,-	
AR43	2001-000411	R-CARBON;18KOHM,5%,1/8W,AA,TP,-	
AR6	2001-000411	R-CARBON;18KOHM,5%,1/8W,AA,TP,-	
ER5	2001-000411	R-CARBON;18KOHM,5%,1/8W,AA,TP,-	
AR14	2001-000429	R-CARBON;1KOHM,5%,1/8W,AA,TP,-	
AR18	2001-000429	R-CARBON;1KOHM,5%,1/8W,AA,TP,-	
AR20	2001-000429	R-CARBON;1KOHM,5%,1/8W,AA,TP,-	
AR27	2001-000429	R-CARBON;1KOHM,5%,1/8W,AA,TP,-	
AR34	2001-000429	R-CARBON;1KOHM,5%,1/8W,AA,TP,-	
AR39	2001-000429	R-CARBON;1KOHM,5%,1/8W,AA,TP,-	
AR4	2001-000429	R-CARBON;1KOHM,5%,1/8W,AA,TP,-	
AR41	2001-000429	R-CARBON;1KOHM,5%,1/8W,AA,TP,-	
DR22	2001-000429	R-CARBON;1KOHM,5%,1/8W,AA,TP,-	
DR36	2001-000429	R-CARBON;1KOHM,5%,1/8W,AA,TP,-	
PR4	2001-000429	R-CARBON;1KOHM,5%,1/8W,AA,TP,-	
PR8	2001-000429	R-CARBON;1KOHM,5%,1/8W,AA,TP,-	
SR4	2001-000429	R-CARBON;1KOHM,5%,1/8W,AA,TP,-	
AJ56	2001-000449	R-CARBON;2.2Kohm,5%,1/8W,AA,TP,1.8x3.2m	
AR19	2001-000449	R-CARBON;2.2Kohm,5%,1/8W,AA,TP,1.8x3.2m	
AR48	2001-000449	R-CARBON;2.2Kohm,5%,1/8W,AA,TP,1.8x3.2m	
AR50	2001-000449	R-CARBON;2.2Kohm,5%,1/8W,AA,TP,1.8x3.2m	
DR25	2001-000449	R-CARBON;2.2Kohm,5%,1/8W,AA,TP,1.8x3.2m	
DR27	2001-000449	R-CARBON;2.2Kohm,5%,1/8W,AA,TP,1.8x3.2m	
DR28	2001-000449	R-CARBON;2.2Kohm,5%,1/8W,AA,TP,1.8x3.2m	
DR29	2001-000449	R-CARBON;2.2Kohm,5%,1/8W,AA,TP,1.8x3.2m	
DR30	2001-000449	R-CARBON;2.2Kohm,5%,1/8W,AA,TP,1.8x3.2m	
DR31	2001-000449	R-CARBON;2.2Kohm,5%,1/8W,AA,TP,1.8x3.2m	
DR42	2001-000449	R-CARBON;2.2Kohm,5%,1/8W,AA,TP,1.8x3.2m	
DR43	2001-000449	R-CARBON;2.2Kohm,5%,1/8W,AA,TP,1.8x3.2m	
DR57	2001-000449	R-CARBON;2.2Kohm,5%,1/8W,AA,TP,1.8x3.2m	
DR75	2001-000449	R-CARBON;2.2Kohm,5%,1/8W,AA,TP,1.8x3.2m	
DR76	2001-000449	R-CARBON;2.2Kohm,5%,1/8W,AA,TP,1.8x3.2m	
DR77	2001-000449	R-CARBON;2.2Kohm,5%,1/8W,AA,TP,1.8x3.2m	
ER7	2001-000449	R-CARBON;2.2Kohm,5%,1/8W,AA,TP,1.8x3.2m	
FR1	2001-000449	R-CARBON;2.2Kohm,5%,1/8W,AA,TP,1.8x3.2m	
FR11	2001-000449	R-CARBON;2.2Kohm,5%,1/8W,AA,TP,1.8x3.2m	
PR26	2001-000449	R-CARBON;2.2Kohm,5%,1/8W,AA,TP,1.8x3.2m	
PR29	2001-000449	R-CARBON;2.2Kohm,5%,1/8W,AA,TP,1.8x3.2m	
AR10	2001-000472	R-CARBON;2.7KOHM,5%,1/8W,AA,TP,-	
AR32	2001-000472	R-CARBON;2.7KOHM,5%,1/8W,AA,TP,-	
DR21	2001-000472	R-CARBON;2.7KOHM,5%,1/8W,AA,TP,-	
FR52	2001-000515	R-CARBON;220ohm,5%,1/8W,AA,TP,1.8x3.2mm	
FR6	2001-000515	R-CARBON;220ohm,5%,1/8W,AA,TP,1.8x3.2mm	
FR8	2001-000515	R-CARBON;220ohm,5%,1/8W,AA,TP,1.8x3.2mm	
-	2001-000522	R-CARBON;22Kohm,5%,1/8W,AA,TP,1.8x3.2mm	
AR54	2001-000522	R-CARBON;22Kohm,5%,1/8W,AA,TP,1.8x3.2mm	
DR24	2001-000522	R-CARBON;22Kohm,5%,1/8W,AA,TP,1.8x3.2mm	
ER8	2001-000522	R-CARBON;22Kohm,5%,1/8W,AA,TP,1.8x3.2mm	
FR12	2001-000522	R-CARBON;22Kohm,5%,1/8W,AA,TP,1.8x3.2mm	
FR32	2001-000522	R-CARBON;22Kohm,5%,1/8W,AA,TP,1.8x3.2mm	
FR33	2001-000522	R-CARBON;22Kohm,5%,1/8W,AA,TP,1.8x3.2mm	
FR38	2001-000522	R-CARBON;22Kohm,5%,1/8W,AA,TP,1.8x3.2mm	
FR39	2001-000522	R-CARBON;22Kohm,5%,1/8W,AA,TP,1.8x3.2mm	
PR13	2001-000522	R-CARBON;22Kohm,5%,1/8W,AA,TP,1.8x3.2mm	
PR17	2001-000522	R-CARBON;22Kohm,5%,1/8W,AA,TP,1.8x3.2mm	
PR21	2001-000522	R-CARBON;22Kohm,5%,1/8W,AA,TP,1.8x3.2mm	
PR35	2001-000522	R-CARBON;22Kohm,5%,1/8W,AA,TP,1.8x3.2mm	
PR5	2001-000522	R-CARBON;22Kohm,5%,1/8W,AA,TP,1.8x3.2mm	
PR9	2001-000522	R-CARBON;22Kohm,5%,1/8W,AA,TP,1.8x3.2mm	
DR17	2001-000527	R-CARBON;22ohm,5%,1/8W,AA,TP,1.8x3.2mm	
DR46	2001-000527	R-CARBON;22ohm,5%,1/8W,AA,TP,1.8x3.2mm	
FR22	2001-000548	R-CARBON;270Kohm,5%,1/8W,AA,TP,1.8x3.2m	
FR23	2001-000548	R-CARBON;270Kohm,5%,1/8W,AA,TP,1.8x3.2m	
AR23	2001-000563	R-CARBON;27Kohm,5%,1/8W,AA,TP,1.8x3.2mm	
AR37	2001-000563	R-CARBON;27Kohm,5%,1/8W,AA,TP,1.8x3.2mm	
AR38	2001-000563	R-CARBON;27Kohm,5%,1/8W,AA,TP,1.8x3.2mm	
DR40	2001-000563	R-CARBON;27Kohm,5%,1/8W,AA,TP,1.8x3.2mm	
-	2001-000591	R-CARBON;3.3KOHM,5%,1/8W,AA,TP,-	
AR55	2001-000591	R-CARBON;3.3KOHM,5%,1/8W,AA,TP,-	
AR56	2001-000591	R-CARBON;3.3KOHM,5%,1/8W,AA,TP,-	
DR11	2001-000591	R-CARBON;3.3KOHM,5%,1/8W,AA,TP,-	
DR20	2001-000591	R-CARBON;3.3KOHM,5%,1/8W,AA,TP,-	
DR5	2001-000591	R-CARBON;3.3KOHM,5%,1/8W,AA,TP,-	
DR58	2001-000591	R-CARBON;3.3KOHM,5%,1/8W,AA,TP,-	
DR70	2001-000591	R-CARBON;3.3KOHM,5%,1/8W,AA,TP,-	
DR71	2001-000591	R-CARBON;3.3KOHM,5%,1/8W,AA,TP,-	
FR55	2001-000591	R-CARBON;3.3KOHM,5%,1/8W,AA,TP,-	
FR80	2001-000591	R-CARBON;3.3KOHM,5%,1/8W,AA,TP,-	
SR7	2001-000591	R-CARBON;3.3KOHM,5%,1/8W,AA,TP,-	
-	2001-000613	R-CARBON;3.9KOHM,5%,1/8W,AA,TP,-	
DR1	2001-000613	R-CARBON;3.9KOHM,5%,1/8W,AA,TP,-	
DR39	2001-000613	R-CARBON;3.9KOHM,5%,1/8W,AA,TP,-	
DR61	2001-000613	R-CARBON;3.9KOHM,5%,1/8W,AA,TP,-	
DR32	2001-000660	R-CARBON;33Kohm,5%,1/8W,AA,TP,1.8x3.2mm	
DR69	2001-000663	R-CARBON;33ohm,5%,1/2W,AA,TP,3.3x9mm	
DR38	2001-000689	R-CARBON;390KOHM,5%,1/8W,AA,TP,-	
AR23	2001-000702	R-CARBON;39Kohm,5%,1/8W,AA,TP,1.8x3.2mm	
AR37	2001-000702	R-CARBON;39Kohm,5%,1/8W,AA,TP,1.8x3.2mm	
PR27	2001-000702	R-CARBON;39Kohm,5%,1/8W,AA,TP,1.8x3.2mm	
DR54	2001-000708	R-CARBON;39OHM,5%,1/8W,AA,TP,-	
AR54	2001-000734	R-CARBON;4.7KOHM,5%,1/8W,AA,TP,-	
DR14	2001-000734	R-CARBON;4.7KOHM,5%,1/8W,AA,TP,-	
DR23	2001-000734	R-CARBON;4.7KOHM,5%,1/8W,AA,TP,-	
DR3	2001-000734	R-CARBON;4.7KOHM,5%,1/8W,AA,TP,-	
DR41	2001-000734	R-CARBON;4.7KOHM,5%,1/8W,AA,TP,-	
DR59	2001-000734	R-CARBON;4.7KOHM,5%,1/8W,AA,TP,-	
DR67	2001-000734	R-CARBON;4.7KOHM,5%,1/8W,AA,TP,-	
FR13	2001-000734	R-CARBON;4.7KOHM,5%,1/8W,AA,TP,-	
FR3	2001-000734	R-CARBON;4.7KOHM,5%,1/8W,AA,TP,-	
DR66	2001-000773	R-CARBON;470Kohm,5%,1/8W,AA,TP,1.8x3.2m	
-	2001-000780	R-CARBON;470OHM,5%,1/8W,AA,TP,-	
DR35	2001-000780	R-CARBON;470OHM,5%,1/8W,AA,TP,-	
AR31	2001-000786	R-CARBON;47Kohm,5%,1/8W,AA,TP,1.8x3.2mm	
AR52	2001-000786	R-CARBON;47Kohm,5%,1/8W,AA,TP,1.8x3.2mm	
AR53	2001-000786	R-CARBON;47Kohm,5%,1/8W,AA,TP,1.8x3.2mm	
AR9	2001-000786	R-CARBON;47Kohm,5%,1/8W,AA,TP,1.8x3.2mm	
DR10	2001-000786	R-CARBON;47Kohm,5%,1/8W,AA,TP,1.8x3.2mm	
DR26	2001-000786	R-CARBON;47Kohm,5%,1/8W,AA,TP,1.8x3.2mm	
DR44	2001-000786	R-CARBON;47Kohm,5%,1/8W,AA,TP,1.8x3.2mm	
DR47	2001-000786	R-CARBON;47Kohm,5%,1/8W,AA,TP,1.8x3.2mm	
DR56	2001-000786	R-CARBON;47Kohm,5%,1/8W,AA,TP,1.8x3.2mm	
DR63	2001-000786	R-CARBON;47Kohm,5%,1/8W,AA,TP,1.8x3.2mm	
DR7	2001-000786	R-CARBON;47Kohm,5%,1/8W,AA,TP,1.8x3.2mm	
FR28	2001-000786	R-CARBON;47Kohm,5%,1/8W,AA,TP,1.8x3.2mm	
FR29	2001-000786	R-CARBON;47Kohm,5%,1/8W,AA,TP,1.8x3.2mm	
FR42	2001-000786	R-CARBON;47Kohm,5%,1/8W,AA,TP,1.8x3.2mm	
FR44	2001-000786	R-CARBON;47Kohm,5%,1/8W,AA,TP,1.8x3.2mm	
FR48	2001-000786	R-CARBON;47Kohm,5%,1/8W,AA,TP,1.8x3.2mm	
FR49	2001-000786	R-CARBON;47Kohm,5%,1/8W,AA,TP,1.8x3.2mm	
FR5	2001-000786	R-CARBON;47Kohm,5%,1/8W,AA,TP,1.8x3.2mm	
FR7	2001-000786	R-CARBON;47Kohm,5%,1/8W,AA,TP,1.8x3.2mm	
PR30	2001-000786	R-CARBON;47Kohm,5%,1/8W,AA,TP,1.8x3.2mm	
PR33	2001-000786	R-CARBON;47Kohm,5%,1/8W,AA,TP,1.8x3.2mm	
DR65	2001-000793	R-CARBON;47ohm,5%,1/8W,AA,TP,1.8x3.2mm	
FR45	2001-000793	R-CARBON;47ohm,5%,1/8W,AA,TP,1.8x3.2mm	
PR24	2001-000793	R-CARBON;47ohm,5%,1/8W,AA,TP,1.8x3.2mm	
DR53	2001-000802	R-CARBON;5.6Kohm,5%,1/8W,AA,TP,1.8x3.2m	
FR14	2001-000802	R-CARBON;5.6Kohm,5%,1/8W,AA,TP,1.8x3.2m	
FR16	2001-000802	R-CARBON;5.6Kohm,5%,1/8W,AA,TP,1.8x3.2m	
FR46	2001-000802	R-CARBON;5.6Kohm,5%,1/8W,AA,TP,1.8x3.2m	
FR47	2001-000802	R-CARBON;5.6Kohm,5%,1/8W,AA,TP,1.8x3.2m	
	2001-000857	R-CARBON;560ohm,5%,1/8W,AA,TP,1.8x3.2mm	
AR12	2001-000864	R-CARBON;56KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
AR17	2001-000864	R-CARBON;56KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
AR35	2001-000864	R-CARBON;56KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
AR46	2001-000864	R-CARBON;56KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
DR64	2001-000864	R-CARBON;56KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
FR41	2001-000864	R-CARBON;56KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
FR43	2001-000864	R-CARBON;56KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
DR51	2001-000890	R-CARBON;6.8KOHM,5%,1/8W,AA,TP,-	
PR6	2001-000890	R-CARBON;6.8KOHM,5%,1/8W,AA,TP,-	
AR13	2001-000924	R-CARBON;680ohm,5%,1/8W,AA,TP,1.8x3.2mm	
AR36	2001-000924	R-CARBON;680ohm,5%,1/8W,AA,TP,1.8x3.2mm	
DR16	2001-000924	R-CARBON;680ohm,5%,1/8W,AA,TP,1.8x3.2mm	
DR45	2001-000924	R-CARBON;680ohm,5%,1/8W,AA,TP,1.8x3.2mm	
OR1	2001-000938	R-CARBON;68ohm,5%,1/8W,AA,TP,1.8x3.2mm	
DR18	2001-000977	R-CARBON;8.2Kohm,5%,1/8W,AA,TP,1.8x3.2m	
DR37	2001-000977	R-CARBON;8.2Kohm,5%,1/8W,AA,TP,1.8x3.2m	
DR40	2001-000977	R-CARBON;8.2Kohm,5%,1/8W,AA,TP,1.8x3.2m	
DR74	2001-000977	R-CARBON;8.2Kohm,5%,1/8W,AA,TP,1.8x3.2m	
-	2001-000995	R-CARBON;820OHM,5%,1/8W,AA,TP,-	
AR29	2001-000995	R-CARBON;820OHM,5%,1/8W,AA,TP,-	
AR7	2001-000995	R-CARBON;820OHM,5%,1/8W,AA,TP,-	
DR2	2001-001006	R-CARBON;82ohm,5%,1/8W,AA,TP,1.8x3.2mm	
DR60	2001-001006	R-CARBON;82ohm,5%,1/8W,AA,TP,1.8x3.2mm	
	2001-001093	R-CARBON(S);2.2Kohm,5%,1/2W,AA,TP,2.4x6.4m	
DR33	2001-001096	R-CARBON(S);2.2ohm,5%,1/2W,AA,TP,2.4x6.4mm	

Location no.	Code no.	Description & Specifiation	Remarks
	2001-001107	R-CARBON(S);220ohm,5%,1/2W,AA,TP,2.4x6.4mm	
	2001-001192	R-CARBON(S);820ohm,5%,1/2W,AA,TP,2.4x6.4mm	
AR26	2003-000468	R-METAL OXIDE(S);10ohm,5%,1W,AA,TP,3.3x9mm	
AR3	2003-000468	R-METAL OXIDE(S);10ohm,5%,1W,AA,TP,3.3x9mm	
	2003-000587	R-METAL OXIDE(S);22ohm,5%,1W,AA,TP,3.3x9mm	
DVR3	2103-000004	VR-SEMI;2Kohm,30%,1/10W,SIDE	
DVR4	2103-000171	VR-SEMI;10KOHM,30%,1/10W,TOP	
FC29	2201-000377	C-CERAMIC,DISC;220PF,5%,50V,UJ,TP,8.0X3.0,5	
FC30	2201-000377	C-CERAMIC,DISC;220PF,5%,50V,UJ,TP,8.0X3.0,5	
OC4	2201-000483	C-CERAMIC,DISC;33pF,5%,50V,CH,TP,5x3,5	
RC1	2201-000547	C-CERAMIC,DISC;4.7nF,20%,500V,Y5T,TP,8x3,5	
RC2	2201-000547	C-CERAMIC,DISC;4.7nF,20%,500V,Y5T,TP,8x3,5	
FC24	2201-000557	C-CERAMIC,DISC;470pF,10%,50V,SL,TP,8x3,5	
	2201-000642	C-CERAMIC,DISC;680pF,10%,50V,Y5P,TP,5x3,2.5mm	
AC12	2201-000653	C-CERAMIC,DISC;68pF,5%,50V,SL,TP,4.0X3.5mm,2.	
AC23	2201-000653	C-CERAMIC,DISC;68pF,5%,50V,SL,TP,4.0X3.5mm,2.	
AC22	2201-000674	C-CERAMIC,DISC;820PF,10%,50V,Y5P,BK,5.0X3.0,2	
AC4	2201-000674	C-CERAMIC,DISC;820PF,10%,50V,Y5P,BK,5.0X3.0,2	
	2201-000783	C-CERAMIC,DISC;100NF,+80%,-20%,50V,Y5V,TP,8X3	
	2202-000644	C-CERAMIC,MLC-AXIAL;33nF,10%,50V,X7R,TP,2.5x6.6,-	
DC11	2202-000781	C-CERAMIC,MLC-AXIAL:100pF,10%,50V,Y5P,TP;100PF,10%,50V,Y5P,TP,3.5X19,-	
DC15	2202-000781	C-CERAMIC,MLC-AXIAL:100pF,10%,50V,Y5P,TP;100PF,10%,50V,Y5P,TP,3.5X19,-	
DC42	2202-000781	C-CERAMIC,MLC-AXIAL:100pF,10%,50V,Y5P,TP;100PF,10%,50V,Y5P,TP,3.5X19,-	
DC55	2202-000781	C-CERAMIC,MLC-AXIAL:100pF,10%,50V,Y5P,TP;100PF,10%,50V,Y5P,TP,3.5X19,-	
DC56	2202-000781	C-CERAMIC,MLC-AXIAL:100pF,10%,50V,Y5P,TP;100PF,10%,50V,Y5P,TP,3.5X19,-	
DC9	2202-000781	C-CERAMIC,MLC-AXIAL:100pF,10%,50V,Y5P,TP;100PF,10%,50V,Y5P,TP,3.5X19,-	
FC46	2202-000781	C-CERAMIC,MLC-AXIAL:100pF,10%,50V,Y5P,TP;100PF,10%,50V,Y5P,TP,3.5X19,-	
FC47	2202-000781	C-CERAMIC,MLC-AXIAL:100pF,10%,50V,Y5P,TP;100PF,10%,50V,Y5P,TP,3.5X19,-	
DC58	2202-000791	C-CERAMIC,MLC-AXIAL;150pF,10%,50V,Y5P,TP,3.5x19,-	
DC59	2202-000791	C-CERAMIC,MLC-AXIAL;150pF,10%,50V,Y5P,TP,3.5x19,-	
DC27	2202-000796	C-CERAMIC,MLC-AXIAL;1nF,10%,50V,Y5P,TP,3.5x19,-	
DC28	2202-000796	C-CERAMIC,MLC-AXIAL;1nF,10%,50V,Y5P,TP,3.5x19,-	
DC3	2202-000796	C-CERAMIC,MLC-AXIAL;1nF,10%,50V,Y5P,TP,3.5x19,-	
DC52	2202-000806	C-CERAMIC,MLC-AXIAL;220pF,10%,50V,Y5P,TP,3.5x19,-	
DC53	2202-000806	C-CERAMIC,MLC-AXIAL;220pF,10%,50V,Y5P,TP,3.5x19,-	
FC1	2202-000806	C-CERAMIC,MLC-AXIAL;220pF,10%,50V,Y5P,TP,3.5x19,-	
FC6	2202-000806	C-CERAMIC,MLC-AXIAL;220pF,10%,50V,Y5P,TP,3.5x19,-	
-	2202-000807	C-CERAMIC,MLC-AXIAL;22NF,+80-20%,25V,Y5V,TP,3.5X19	
DC29	2202-000807	C-CERAMIC,MLC-AXIAL;22NF,+80-20%,25V,Y5V,TP,3.5X19	
	2202-000820	C-CERAMIC,MLC-AXIAL;5.6NF,20%,16V,Y5R,TP,3.5X19,-	
DC21	2202-000847	C-CERAMIC,MLC-AXIAL;1,8NF,30%,50V,Y5S,TP,3.5X1.9	
DC31	2202-000847	C-CERAMIC,MLC-AXIAL;1,8NF,30%,50V,Y5S,TP,3.5X1.9	
DC20	2202-000848	C-CERAMIC,MLC-AXIAL;1.5NF,30%,50V,Y5S,TP,3.5X1.9,-	
DC25	2202-000848	C-CERAMIC,MLC-AXIAL;1.5NF,30%,50V,Y5S,TP,3.5X1.9,-	
DC30	2202-000848	C-CERAMIC,MLC-AXIAL;1.5NF,30%,50V,Y5S,TP,3.5X1.9,-	
DC57	2202-000854	C-CERAMIC,MLC-AXIAL;47NF,30%,50V,Y5R,TP,3.5X1.9,-	
DC4	2301-000369	C-FILM,PEF;1.8nF,5%,50V,TP,5.5x12x3,3mm	
DC44	2301-000369	C-FILM,PEF;1.8nF,5%,50V,TP,5.5x12x3,3mm	
AC11	2301-000373	C-FILM,PEF;100NF,10%,50V,TP,11X12.5X6.5,7	
AC8	2301-000373	C-FILM,PEF;100NF,10%,50V,TP,11X12.5X6.5,7	
DC12	2301-000373	C-FILM,PEF;100NF,10%,50V,TP,11X12.5X6.5,7	
DC38	2301-000373	C-FILM,PEF;100NF,10%,50V,TP,11X12.5X6.5,7	
FC22	2301-000373	C-FILM,PEF;100NF,10%,50V,TP,11X12.5X6.5,7	
FC23	2301-000373	C-FILM,PEF;100NF,10%,50V,TP,11X12.5X6.5,7	
FC34	2301-000373	C-FILM,PEF;100NF,10%,50V,TP,11X12.5X6.5,7	
FC35	2301-000373	C-FILM,PEF;100NF,10%,50V,TP,11X12.5X6.5,7	
FC36	2301-000373	C-FILM,PEF;100NF,10%,50V,TP,11X12.5X6.5,7	
FC37	2301-000373	C-FILM,PEF;100NF,10%,50V,TP,11X12.5X6.5,7	
PC11	2301-000373	C-FILM,PEF;100NF,10%,50V,TP,11X12.5X6.5,7	
PC12	2301-000373	C-FILM,PEF;100NF,10%,50V,TP,11X12.5X6.5,7	
PC13	2301-000373	C-FILM,PEF;100NF,10%,50V,TP,11X12.5X6.5,7	
DC22	2301-000383	C-FILM,PEF;10nF,5%,50V,TP,6x7x3.2mm,5mm	
DC56	2301-000383	C-FILM,PEF;10nF,5%,50V,TP,6x7x3.2mm,5mm	
FC33	2301-000383	C-FILM,PEF;10nF,5%,50V,TP,6x7x3.2mm,5mm	
OC3	2301-000383	C-FILM,PEF;10nF,5%,50V,TP,6x7x3.2mm,5mm	
DC18	2301-000390	C-FILM,PEF;15NF,10%,50V,TP,6.5X9X3.5MM,5M	
DC23	2301-000390	C-FILM,PEF;15NF,10%,50V,TP,6.5X9X3.5MM,5M	
DC35	2301-000390	C-FILM,PEF;15NF,10%,50V,TP,6.5X9X3.5MM,5M	
DC34	2301-000396	C-FILM,PEF;18NF,5%,50V,TP,7X12X4,4MM	
DC8	2301-000396	C-FILM,PEF;18NF,5%,50V,TP,7X12X4,4MM	
FC10	2301-000412	C-FILM,PEF;22NF,10%,50V,TP,6.5X10.5X4MM,5	
FC12	2301-000412	C-FILM,PEF;22NF,10%,50V,TP,6.5X10.5X4MM,5	
FC13	2301-000412	C-FILM,PEF;22NF,10%,50V,TP,6.5X10.5X4MM,5	
FC38	2301-000419	C-FILM,PEF;27NF,10%,50V,TP,7.5X10.5X4MM,5	
FC39	2301-000419	C-FILM,PEF;27NF,10%,50V,TP,7.5X10.5X4MM,5	
DC17	2301-000428	C-FILM,PEF;3.9nF,5%,50V,TP,5.5x12x3,3mm	
DC50	2301-000428	C-FILM,PEF;3.9nF,5%,50V,TP,5.5x12x3,3mm	
PC23	2301-000449	C-FILM,PEF;47NF,10%,50V,TP,8X11X4.5MM,5MM	
	2301-000459	C-FILM,PEF;56NF,5%,50V,TP,9.5X12.5X5,6.5M	
DC37	2301-000475	C-FILM,PEF;8.2nF,5%,50V,TP,6.5x12x3.5,3.5	
DC5	2301-000475	C-FILM,PEF;8.2nF,5%,50V,TP,6.5x12x3.5,3.5	
DC36	2401-000240	C-AL;100uF,20%,10V,GP,TP,5x11,5	
AC15	2401-000303	C-AL;100uF,20%,25V,GP,TP,6.3x11,5	
AC3	2401-000303	C-AL;100uF,20%,25V,GP,TP,6.3x11,5	
AC14	2401-000357	C-AL;100UF,20%,50V,GP,-,8X11.5,3.5M	
-	2401-000419	C-AL;10UF,20%,16V,GP,-,4X7,5	
DC2	2401-000419	C-AL;10UF,20%,16V,GP,-,4X7,5	
FC40	2401-000438	C-AL;10UF,20%,25V,GP,-,5X11,2MM	
DC51	2401-000795	C-AL;220UF,20%,16V,GP,-,8X11.5,3.5M	
PC15	2401-000795	C-AL;220UF,20%,16V,GP,-,8X11.5,3.5M	
	2401-000830	C-AL;220uF,20%,25V,GP,TP,8x11.5,5	
AC18	2401-000871	C-AL;220UF,20%,50V,GP,-,10X16MM,5MM	
AC6	2401-000871	C-AL;220UF,20%,50V,GP,-,10X16MM,5MM	

Location no.	Code no.	Description & Specifiation	Remarks
DC13	2401-001019	C-AL;3.3UF,20%,50V,GP,-,5X7,1.5MM	
DC16	2401-001019	C-AL;3.3UF,20%,50V,GP,-,5X7,1.5MM	
DC32	2401-001019	C-AL;3.3UF,20%,50V,GP,-,5X7,1.5MM	
DC41	2401-001019	C-AL;3.3UF,20%,50V,GP,-,5X7,1.5MM	
DC47	2401-001019	C-AL;3.3UF,20%,50V,GP,-,5X7,1.5MM	
DC7	2401-001019	C-AL;3.3UF,20%,50V,GP,-,5X7,1.5MM	
DC1	2401-001080	C-AL;330nF,20%,50V,GP,-,5x11,2mm	
DC45	2401-001080	C-AL;330nF,20%,50V,GP,-,5x11,2mm	
AC25	2401-001538	C-AL;47UF,20%,25V,GP,-,6X11,2.5MM	
AC28	2401-001538	C-AL;47UF,20%,25V,GP,-,6X11,2.5MM	
DC33	2401-001538	C-AL;47UF,20%,25V,GP,-,6X11,2.5MM	
DC6	2401-001538	C-AL;47UF,20%,25V,GP,-,6X11,2.5MM	
PC16	2401-001538	C-AL;47UF,20%,25V,GP,-,6X11,2.5MM	
PC17	2401-001538	C-AL;47UF,20%,25V,GP,-,6X11,2.5MM	
PC19	2401-001538	C-AL;47UF,20%,25V,GP,-,6X11,2.5MM	
PC22	2401-001538	C-AL;47UF,20%,25V,GP,-,6X11,2.5MM	
PC24	2401-001538	C-AL;47UF,20%,25V,GP,-,6X11,2.5MM	
PC7	2401-001538	C-AL;47UF,20%,25V,GP,-,6X11,2.5MM	
PC9	2401-001538	C-AL;47UF,20%,25V,GP,-,6X11,2.5MM	
-	2401-001572	C-AL;47UF,20%,50V,GP,-,6.3X11,2.5MM	
PC10	2401-001572	C-AL;47UF,20%,50V,GP,-,6.3X11,2.5MM	
PC21	2401-001572	C-AL;47UF,20%,50V,GP,-,6.3X11,2.5MM	
AC19	2401-001887	C-AL;100NF,20%,50V,-,TP,4X7MM,5	
AC2	2401-001887	C-AL;100NF,20%,50V,-,TP,4X7MM,5	
DC19	2401-001895	C-AL;100uF,20%,16V,GP,6.3x11mm,2.5m	
DC24	2401-001895	C-AL;100uF,20%,16V,GP,6.3x11mm,2.5m	
AC13	2401-001912	C-AL;1uF,20%,50V,GP,5x11mm,2mm,BK	
AC7	2401-001912	C-AL;1uF,20%,50V,GP,5x11mm,2mm,BK	
DC54	2401-001912	C-AL;1uF,20%,50V,GP,5x11mm,2mm,BK	
DC58	2401-001912	C-AL;1uF,20%,50V,GP,5x11mm,2mm,BK	
EC4	2401-001912	C-AL;1uF,20%,50V,GP,5x11mm,2mm,BK	
EC9	2401-001912	C-AL;1uF,20%,50V,GP,5x11mm,2mm,BK	
FC11	2401-001912	C-AL;1uF,20%,50V,GP,5x11mm,2mm,BK	
FC43	2401-001912	C-AL;1uF,20%,50V,GP,5x11mm,2mm,BK	
FC9	2401-001912	C-AL;1uF,20%,50V,GP,5x11mm,2mm,BK	
PC5	2401-001912	C-AL;1uF,20%,50V,GP,5x11mm,2mm,BK	
	2401-001938	C-AL;22UF,20%,25V,GP,BK,5X11MM,2MM	
AC1	2401-001952	C-AL;4.7UF,20%,50V,-,TP,6.3X7,5	
AC16	2401-001952	C-AL;4.7UF,20%,50V,-,TP,6.3X7,5	
DC40	2401-001952	C-AL;4.7UF,20%,50V,-,TP,6.3X7,5	
FC2	2401-001952	C-AL;4.7UF,20%,50V,-,TP,6.3X7,5	
FC3	2401-001952	C-AL;4.7UF,20%,50V,-,TP,6.3X7,5	
FC4	2401-001952	C-AL;4.7UF,20%,50V,-,TP,6.3X7,5	
FC41	2401-001952	C-AL;4.7UF,20%,50V,-,TP,6.3X7,5	
FC42	2401-001952	C-AL;4.7UF,20%,50V,-,TP,6.3X7,5	
FC45	2401-001952	C-AL;4.7UF,20%,50V,-,TP,6.3X7,5	
FC5	2401-001952	C-AL;4.7UF,20%,50V,-,TP,6.3X7,5	
PC14	2401-001952	C-AL;4.7UF,20%,50V,-,TP,6.3X7,5	
PC6	2401-001952	C-AL;4.7UF,20%,50V,-,TP,6.3X7,5	
AC25	2401-001975	C-AL;47UF,20%,16V,GP,TP,5X11MM,5	
DC14	2401-001975	C-AL;47UF,20%,16V,GP,TP,5X11MM,5	
DC43	2401-001975	C-AL;47UF,20%,16V,GP,TP,5X11MM,5	
FC15	2401-001975	C-AL;47UF,20%,16V,GP,TP,5X11MM,5	
FC16	2401-001975	C-AL;47UF,20%,16V,GP,TP,5X11MM,5	
FC44	2401-001975	C-AL;47UF,20%,16V,GP,TP,5X11MM,5	
PC8	2401-001975	C-AL;47UF,20%,16V,GP,TP,5X11MM,5	
FC20	2401-001989	C-AL;4.7uF,20%,50V,BP,TP,5x11,5	
FC21	2401-001989	C-AL;4.7uF,20%,50V,BP,TP,5x11,5	
DC10	2401-002180	C-AL;2.2UF,20%,50V,GP,TP,5X11,5MM	
DC39	2401-002180	C-AL;2.2UF,20%,50V,GP,TP,5X11,5MM	
DC48	2401-002180	C-AL;2.2UF,20%,50V,GP,TP,5X11,5MM	
DC49	2401-002180	C-AL;2.2UF,20%,50V,GP,TP,5X11,5MM	
EC5	2401-002180	C-AL;2.2UF,20%,50V,GP,TP,5X11,5MM	
FC25	2401-002180	C-AL;2.2UF,20%,50V,GP,TP,5X11,5MM	
FC26	2401-002180	C-AL;2.2UF,20%,50V,GP,TP,5X11,5MM	
FC27	2401-002180	C-AL;2.2UF,20%,50V,GP,TP,5X11,5MM	
FC28	2401-002180	C-AL;2.2UF,20%,50V,GP,TP,5X11,5MM	
FC31	2401-002180	C-AL;2.2UF,20%,50V,GP,TP,5X11,5MM	
FC32	2401-002180	C-AL;2.2UF,20%,50V,GP,TP,5X11,5MM	
PL1	2701-000116	INDUCTOR-AXIAL;10uH,10%,4.2x9.8mm	
AL3	2701-000298	INDUCTOR-AXIAL;470uH,10%,4.2x9.8mm	
DL3	2701-000298	INDUCTOR-AXIAL;470uH,10%,4.2x9.8mm	
RF1	3602-000147	FUSE-CLIP;250V,7.5A,30MOHM	
RF2	3602-000147	FUSE-CLIP;250V,7.5A,30MOHM	
PQ12	AC14-12001G	IC;KA78L05,T,-	
	AH90-30545F	**ASSY-PCB-FRONT;MAX910,FRONT**	**S.N.A.**
ULD1	0601-001232	LED;TR,LED,1PCS,130-260%	
UIC3	1203-000276	IC-POSI.FIXED REG.;7805,TO-220,3P,-,PLASTIC,4.8/5	
UR2	2003-000471	R-METAL OXIDE(S);10ohm,5%,2W,AA,TP,4x12mm	
UAR2	2003-000690	R-METAL OXIDE(S);4.7ohm,5%,2W,AA,TP,4x12mm	
UC1	2409-000123	C-EDL;47000UF,4UA,5.5V,-,BK,-,5MM	
UX2	2801-001394	CRYSTAL-UNIT;32.768KHz,20ppm,28-AAY,12.5pF,	
UX1	2802-000181	RESONATOR-CERAMIC;6MHZ,0.3%,BK,9.0X4.0X7.5MM	
UVR1	3406-001022	SWITCH-ROTARY;5V,0.5mA,24Pulse/no click,12mm	
UCW3	3708-000454	CONNECTOR-FPC/FC/PIC;22P,1.25MM,STRAIGHT,	
UCW2	3710-001045	CONNECTOR-SOCKET;22P,1R,1.25MM,ANGLE,SN	
	3710-001046	CONNECTOR-SOCKET;10P,1R,1.25MM,ANGLE,SN	
LAMP1	4713-000158	LAMP-NEON;9V,75MA,0.7W,TRP,3X5.3MM,-,	
LAMP2	4713-000158	LAMP-NEON;9V,75MA,0.7W,TRP,3X5.3MM,-,	
LAMP3	4713-000158	LAMP-NEON;9V,75MA,0.7W,TRP,3X5.3MM,-,	
R1	AC59-60060A	MODULE-REMOCON;GP1U281R,SHARP,38KHZ,-,-,-,-	
LCD	AH07-00001A	LCD;-,-,MAX900,-	

Location no.	Code no.	Description & Specification	Remarks
UIC1	AH09-00003A	IC-MICOM;LC867232,100P,-,-,-	
UIC2	AH14-10007C	IC;NJU3711M,SOP,STICK EXPANDER 8BIT	
LAMP1	AH61-00022A	CAP-;MAX900,SILICON,.,BLUE,RUBBER-CAP/BLUE,-	
LAMP2	AH61-00022A	CAP-;MAX900,SILICON,.,BLUE,RUBBER-CAP/BLUE,-	
LAMP3	AH61-00022A	CAP-;MAX900,SILICON,.,BLUE,RUBBER-CAP/BLUE,-	
LCD1	AH61-20550A	HOLDER-LCD;-,ABS,94HB,WHT,-,MAX900	
	AH67-40044A	FILTER-LCD;-,PC,T0.5,-,MILKY,-,-,MAX900,-	
MD1	0401-000101	DIODE-SWITCHING;1N4148,100V,200mA,DO-35,TP	
MD2	0401-000101	DIODE-SWITCHING;1N4148,100V,200mA,DO-35,TP	
MD3	0401-000101	DIODE-SWITCHING;1N4148,100V,200mA,DO-35,TP	
UD4	0401-000101	DIODE-SWITCHING;1N4148,100V,200mA,DO-35,TP	
UD5	0401-000101	DIODE-SWITCHING;1N4148,100V,200mA,DO-35,TP	
UD7	0401-000101	DIODE-SWITCHING;1N4148,100V,200mA,DO-35,TP	
UD9	0401-000101	DIODE-SWITCHING;1N4148,100V,200mA,DO-35,TP	
UR101	0401-000101	DIODE-SWITCHING;1N4148,100V,200mA,DO-35,TP	
UR201	0401-000101	DIODE-SWITCHING;1N4148,100V,200mA,DO-35,TP	
UD2	0402-000127	DIODE-RECTIFIER;1N4002,100V,1A,DO-41,TP	
UD20	0402-000127	DIODE-RECTIFIER;1N4002,100V,1A,DO-41,TP	
UD21	0402-000127	DIODE-RECTIFIER;1N4002,100V,1A,DO-41,TP	
UD3	0402-000127	DIODE-RECTIFIER;1N4002,100V,1A,DO-41,TP	
UD6	0402-000127	DIODE-RECTIFIER;1N4002,100V,1A,DO-41,TP	
UD8	0402-000127	DIODE-RECTIFIER;1N4002,100V,1A,DO-41,TP	
MQ2	0501-000398	TR-SMALL SIGNAL;KSC945,NPN,250mW,TO-92,TP,120-	
MQ3	0501-000398	TR-SMALL SIGNAL;KSC945,NPN,250mW,TO-92,TP,120-	
MQ4	0501-000398	TR-SMALL SIGNAL;KSC945,NPN,250mW,TO-92,TP,120-	
UQ5	0501-000398	TR-SMALL SIGNAL;KSC945,NPN,250mW,TO-92,TP,120-	
UQ2	0502-000424	TR-POWER;2SB1566-F,PNP,2W,TO-220FN,BK,1	
MQ1	0504-000118	TR-DIGITAL;KSR1003,NPN,300mW,22K-22K,TO-9	
UQ1	0504-000118	TR-DIGITAL;KSR1003,NPN,300mW,22K-22K,TO-9	
UQ4	0504-000118	TR-DIGITAL;KSR1003,NPN,300mW,22K-22K,TO-9	
UQ6	0504-000118	TR-DIGITAL;KSR1003,NPN,300mW,22K-22K,TO-9	
UQ3	0504-001003	TR-DIGITAL;KSR2003,PNP,300MW,22K-22K,TO-9	
UQ7	0504-001003	TR-DIGITAL;KSR2003,PNP,300MW,22K-22K,TO-9	
ULD2	0601-001232	LED;TR,LED,1PCS,130-260%	
ULD3	0601-001232	LED;TR,LED,1PCS,130-260%	
UR34	2001-000008	R-CARBON;15Kohm,5%,1/8W,AA,TP,1.8x3.2mm	
UR25	2001-000221	R-CARBON;1.2KOHM,5%,1/8W,AA,TP,-	
UR26	2001-000221	R-CARBON;1.2KOHM,5%,1/8W,AA,TP,-	
UR29	2001-000221	R-CARBON;1.2KOHM,5%,1/8W,AA,TP,-	
UR36	2001-000221	R-CARBON;1.2KOHM,5%,1/8W,AA,TP,-	
UR21	2001-000258	R-CARBON;1.8KOHM,5%,1/8W,AA,TP,-	
UR35	2001-000258	R-CARBON;1.8KOHM,5%,1/8W,AA,TP,-	
UR37	2001-000258	R-CARBON;1.8KOHM,5%,1/8W,AA,TP,-	
UR69	2001-000258	R-CARBON;1.8KOHM,5%,1/8W,AA,TP,-	
MR15	2001-000273	R-CARBON;100KOHM,5%,1/8W,AA,TP,-	
MR9	2001-000281	R-CARBON;100ohm,5%,1/8W,AA,TP,1.8x3.2mm	
UR10	2001-000281	R-CARBON;100ohm,5%,1/8W,AA,TP,1.8x3.2mm	
UR11	2001-000281	R-CARBON;100ohm,5%,1/8W,AA,TP,1.8x3.2mm	
UR12	2001-000281	R-CARBON;100ohm,5%,1/8W,AA,TP,1.8x3.2mm	
UR13	2001-000281	R-CARBON;100ohm,5%,1/8W,AA,TP,1.8x3.2mm	
UR14	2001-000281	R-CARBON;100ohm,5%,1/8W,AA,TP,1.8x3.2mm	
UR15	2001-000281	R-CARBON;100ohm,5%,1/8W,AA,TP,1.8x3.2mm	
UR39	2001-000281	R-CARBON;100ohm,5%,1/8W,AA,TP,1.8x3.2mm	
UR40	2001-000281	R-CARBON;100ohm,5%,1/8W,AA,TP,1.8x3.2mm	
UR41	2001-000281	R-CARBON;100ohm,5%,1/8W,AA,TP,1.8x3.2mm	
UR42	2001-000281	R-CARBON;100ohm,5%,1/8W,AA,TP,1.8x3.2mm	
UR43	2001-000281	R-CARBON;100ohm,5%,1/8W,AA,TP,1.8x3.2mm	
UR44	2001-000281	R-CARBON;100ohm,5%,1/8W,AA,TP,1.8x3.2mm	
UR45	2001-000281	R-CARBON;100ohm,5%,1/8W,AA,TP,1.8x3.2mm	
UR46	2001-000281	R-CARBON;100ohm,5%,1/8W,AA,TP,1.8x3.2mm	
UR47	2001-000281	R-CARBON;100ohm,5%,1/8W,AA,TP,1.8x3.2mm	
UR48	2001-000281	R-CARBON;100ohm,5%,1/8W,AA,TP,1.8x3.2mm	
UR49	2001-000281	R-CARBON;100ohm,5%,1/8W,AA,TP,1.8x3.2mm	
UR50	2001-000281	R-CARBON;100ohm,5%,1/8W,AA,TP,1.8x3.2mm	
UR51	2001-000281	R-CARBON;100ohm,5%,1/8W,AA,TP,1.8x3.2mm	
UR55	2001-000281	R-CARBON;100ohm,5%,1/8W,AA,TP,1.8x3.2mm	
UR59	2001-000281	R-CARBON;100ohm,5%,1/8W,AA,TP,1.8x3.2mm	
UR60	2001-000281	R-CARBON;100ohm,5%,1/8W,AA,TP,1.8x3.2mm	
UR61	2001-000281	R-CARBON;100ohm,5%,1/8W,AA,TP,1.8x3.2mm	
UR62	2001-000281	R-CARBON;100ohm,5%,1/8W,AA,TP,1.8x3.2mm	
UR63	2001-000281	R-CARBON;100ohm,5%,1/8W,AA,TP,1.8x3.2mm	
UR64	2001-000281	R-CARBON;100ohm,5%,1/8W,AA,TP,1.8x3.2mm	
UR65	2001-000281	R-CARBON;100ohm,5%,1/8W,AA,TP,1.8x3.2mm	
UR66	2001-000281	R-CARBON;100ohm,5%,1/8W,AA,TP,1.8x3.2mm	
UR67	2001-000281	R-CARBON;100ohm,5%,1/8W,AA,TP,1.8x3.2mm	
UR68	2001-000281	R-CARBON;100ohm,5%,1/8W,AA,TP,1.8x3.2mm	
UR70	2001-000281	R-CARBON;100ohm,5%,1/8W,AA,TP,1.8x3.2mm	
UR71	2001-000281	R-CARBON;100ohm,5%,1/8W,AA,TP,1.8x3.2mm	
UR72	2001-000281	R-CARBON;100ohm,5%,1/8W,AA,TP,1.8x3.2mm	
UR73	2001-000281	R-CARBON;100ohm,5%,1/8W,AA,TP,1.8x3.2mm	
UR74	2001-000281	R-CARBON;100ohm,5%,1/8W,AA,TP,1.8x3.2mm	
UR75	2001-000281	R-CARBON;100ohm,5%,1/8W,AA,TP,1.8x3.2mm	
UR76	2001-000281	R-CARBON;100ohm,5%,1/8W,AA,TP,1.8x3.2mm	
UR77	2001-000281	R-CARBON;100ohm,5%,1/8W,AA,TP,1.8x3.2mm	
UR80	2001-000281	R-CARBON;100ohm,5%,1/8W,AA,TP,1.8x3.2mm	
UR81	2001-000281	R-CARBON;100ohm,5%,1/8W,AA,TP,1.8x3.2mm	
UR9	2001-000281	R-CARBON;100ohm,5%,1/8W,AA,TP,1.8x3.2mm	
UUR8	2001-000281	R-CARBON;100ohm,5%,1/8W,AA,TP,1.8x3.2mm	
MR10	2001-000290	R-CARBON;10KOHM,5%,1/8W,AA,TP,-	
MR13	2001-000290	R-CARBON;10KOHM,5%,1/8W,AA,TP,-	
MR18	2001-000290	R-CARBON;10KOHM,5%,1/8W,AA,TP,-	
MR2	2001-000290	R-CARBON;10KOHM,5%,1/8W,AA,TP,-	
MR20	2001-000290	R-CARBON;10KOHM,5%,1/8W,AA,TP,-	

Location no.	Code no.	Description & Specification	Remarks
MR3	2001-000290	R-CARBON;10KOHM,5%,1/8W,AA,TP,-	
UR16	2001-000290	R-CARBON;10KOHM,5%,1/8W,AA,TP,-	
UR17	2001-000290	R-CARBON;10KOHM,5%,1/8W,AA,TP,-	
UR19	2001-000290	R-CARBON;10KOHM,5%,1/8W,AA,TP,-	
UR5	2001-000290	R-CARBON;10KOHM,5%,1/8W,AA,TP,-	
UR78	2001-000290	R-CARBON;10KOHM,5%,1/8W,AA,TP,-	
UR79	2001-000290	R-CARBON;10KOHM,5%,1/8W,AA,TP,-	
UR83	2001-000290	R-CARBON;10KOHM,5%,1/8W,AA,TP,-	
UR84	2001-000290	R-CARBON;10KOHM,5%,1/8W,AA,TP,-	
UR85	2001-000290	R-CARBON;10KOHM,5%,1/8W,AA,TP,-	
UR7	2001-000325	R-CARBON;120ohm,5%,1/8W,AA,TP,1.8x3.2mm	
UR38	2001-000362	R-CARBON;150ohm,5%,1/8W,AA,TP,1.8x3.2mm	
MR17	2001-000429	R-CARBON;1KOHM,5%,1/8W,AA,TP,-	
MR4	2001-000429	R-CARBON;1KOHM,5%,1/8W,AA,TP,-	
MR5	2001-000429	R-CARBON;1KOHM,5%,1/8W,AA,TP,-	
MR8	2001-000429	R-CARBON;1KOHM,5%,1/8W,AA,TP,-	
MR12	2001-000449	R-CARBON;2.2Kohm,5%,1/8W,AA,TP,1.8x3.2m	
MR6	2001-000449	R-CARBON;2.2Kohm,5%,1/8W,AA,TP,1.8x3.2m	
UR18	2001-000449	R-CARBON;2.2Kohm,5%,1/8W,AA,TP,1.8x3.2m	
UR33	2001-000449	R-CARBON;2.2Kohm,5%,1/8W,AA,TP,1.8x3.2m	
UR56	2001-000449	R-CARBON;2.2Kohm,5%,1/8W,AA,TP,1.8x3.2m	
UR82	2001-000472	R-CARBON;2.7KOHM,5%,1/8W,AA,TP,-	
UR86	2001-000472	R-CARBON;2.7KOHM,5%,1/8W,AA,TP,-	
MR16	2001-000515	R-CARBON;220ohm,5%,1/8W,AA,TP,1.8x3.2mm	
MR7	2001-000522	R-CARBON;22Kohm,5%,1/8W,AA,TP,1.8x3.2mm	
	2001-000595	R-CARBON;3.3Mohm,5%,1/8W,AA,TP,1.8x3.2m	
UR53	2001-000613	R-CARBON;3.9KOHM,5%,1/8W,AA,TP,-	
UR58	2001-000613	R-CARBON;3.9KOHM,5%,1/8W,AA,TP,-	
UR32	2001-000734	R-CARBON;4.7KOHM,5%,1/8W,AA,TP,-	
MR14	2001-000786	R-CARBON;47Kohm,5%,1/8W,AA,TP,1.8x3.2mm	
MR19	2001-000786	R-CARBON;47Kohm,5%,1/8W,AA,TP,1.8x3.2mm	
UR52	2001-000802	R-CARBON;5.6Kohm,5%,1/8W,AA,TP,1.8x3.2m	
UR57	2001-000802	R-CARBON;5.6Kohm,5%,1/8W,AA,TP,1.8x3.2m	
MR11	2001-000864	R-CARBON;56KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
UR1	2001-000924	R-CARBON;680ohm,5%,1/8W,AA,TP,1.8x3.2mm	
UR23	2001-000924	R-CARBON;680ohm,5%,1/8W,AA,TP,1.8x3.2mm	
UR27	2001-000924	R-CARBON;680ohm,5%,1/8W,AA,TP,1.8x3.2mm	
UR30	2001-000924	R-CARBON;680ohm,5%,1/8W,AA,TP,1.8x3.2mm	
MR1	2001-000977	R-CARBON;8.2Kohm,5%,1/8W,AA,TP,1.8x3.2m	
UR4	2001-000977	R-CARBON;8.2Kohm,5%,1/8W,AA,TP,1.8x3.2m	
UR22	2001-000995	R-CARBON;820OHM,5%,1/8W,AA,TP,-	
UR24	2001-000995	R-CARBON;820OHM,5%,1/8W,AA,TP,-	
UR28	2001-000995	R-CARBON;820OHM,5%,1/8W,AA,TP,-	
UR31	2001-000995	R-CARBON;820OHM,5%,1/8W,AA,TP,-	
UR20	2001-001195	R-CARBON(S);82ohm,5%,1/2W,AA,TP,2.4x6.4mm	
UC12	2201-000247	C-CERAMIC,DISC;15pF,5%,50V,CH,TP,5x3,5	
UC13	2201-000247	C-CERAMIC,DISC;15pF,5%,50V,CH,TP,5x3,5	
UC11	2201-000381	C-CERAMIC,DISC;22NF,20%,50V,Y5V,8.0x4.0mm,5mm,TP	
UC20	2201-000381	C-CERAMIC,DISC;22NF,20%,50V,Y5V,8.0x4.0mm,5mm,TP	
UC7	2201-000381	C-CERAMIC,DISC;22NF,20%,50V,Y5V,8.0x4.0mm,5mm,TP	
UC8	2201-000381	C-CERAMIC,DISC;22NF,20%,50V,Y5V,8.0x4.0mm,5mm,TP	
UC9	2201-000381	C-CERAMIC,DISC;22NF,20%,50V,Y5V,8.0x4.0mm,5mm,TP	
UC15	2201-000423	C-CERAMIC,DISC;27pF,5%,50V,NPO,TP,5x3,2.5	
UC16	2201-000423	C-CERAMIC,DISC;27pF,5%,50V,NPO,TP,5x3,2.5	
MC12	2202-000263	C-CERAMIC,MLC-AXIAL;470pF,10%,50V,Y5P,TP,3.5x19,-	
UC14	2202-000781	C-CERAMIC,MLC-AXIAL;100pF,10%,50V,Y5P,TP;100PF,10%,50V,Y5P,TP,3.5X19,-	
MC13	2202-000796	C-CERAMIC,MLC-AXIAL;1nF,10%,50V,Y5P,TP,3.5x19,-	
UC6	2301-000449	C-FILM,PEF;47NF,10%,50V,TP,8X11X4.5MM,5MM	
UC10	2401-000240	C-AL;100uF,20%,10V,GP,TP,5x11,5	
UC18	2401-000759	C-AL;220NF,20%,50V,GP,-,5X11,2MM	
UC1	2401-001895	C-AL;100uF,20%,16V,GP,6.3x11mm,2.5m	
UC2	2401-001895	C-AL;100uF,20%,16V,GP,6.3x11mm,2.5m	
UC4	2401-001895	C-AL;100uF,20%,16V,GP,6.3x11mm,2.5m	
MC14	2401-001912	C-AL;1uF,20%,50V,GP,5x11mm,2mm,BK	
MC2	2401-001912	C-AL;1uF,20%,50V,GP,5x11mm,2mm,BK	
MC4	2401-001912	C-AL;1uF,20%,50V,GP,5x11mm,2mm,BK	
MC5	2401-001912	C-AL;1uF,20%,50V,GP,5x11mm,2mm,BK	
MC7	2401-001936	C-AL;22UF,20%,16V,GP,TP,5X11MM,5MM	
MC8	2401-001952	C-AL;4.7UF,20%,50V,-,TP,6.3X7,5	
MC9	2401-001952	C-AL;4.7UF,20%,50V,-,TP,6.3X7,5	
UC19	2401-001952	C-AL;4.7UF,20%,50V,-,TP,6.3X7,5	
UC3	2401-001952	C-AL;4.7UF,20%,50V,-,TP,6.3X7,5	
MC10	2401-001954	C-AL;4.7UF,20%,50V,GP,BK,5X11MM,5	
MC1	2401-001975	C-AL;47UF,20%,16V,GP,TP,5X11MM,5	
MC15	2401-001975	C-AL;47UF,20%,16V,GP,TP,5X11MM,5	
MC3	2401-001975	C-AL;47UF,20%,16V,GP,TP,5X11MM,5	
MC6	2401-001975	C-AL;47UF,20%,16V,GP,TP,5X11MM,5	
UC5	2401-001975	C-AL;47UF,20%,16V,GP,TP,5X11MM,5	
USW1	3404-000165	SWITCH-TACT;12V,50MA,160GF+-50GF,6X6MM,SPS	
USW10	3404-000165	SWITCH-TACT;12V,50MA,160GF+-50GF,6X6MM,SPS	
USW11	3404-000165	SWITCH-TACT;12V,50MA,160GF+-50GF,6X6MM,SPS	
USW12	3404-000165	SWITCH-TACT;12V,50MA,160GF+-50GF,6X6MM,SPS	
USW13	3404-000165	SWITCH-TACT;12V,50MA,160GF+-50GF,6X6MM,SPS	
USW14	3404-000165	SWITCH-TACT;12V,50MA,160GF+-50GF,6X6MM,SPS	
USW15	3404-000165	SWITCH-TACT;12V,50MA,160GF+-50GF,6X6MM,SPS	
USW16	3404-000165	SWITCH-TACT;12V,50MA,160GF+-50GF,6X6MM,SPS	
USW17	3404-000165	SWITCH-TACT;12V,50MA,160GF+-50GF,6X6MM,SPS	
USW18	3404-000165	SWITCH-TACT;12V,50MA,160GF+-50GF,6X6MM,SPS	
USW19	3404-000165	SWITCH-TACT;12V,50MA,160GF+-50GF,6X6MM,SPS	
USW2	3404-000165	SWITCH-TACT;12V,50MA,160GF+-50GF,6X6MM,SPS	
USW20	3404-000165	SWITCH-TACT;12V,50MA,160GF+-50GF,6X6MM,SPS	
USW21	3404-000165	SWITCH-TACT;12V,50MA,160GF+-50GF,6X6MM,SPS	
USW22	3404-000165	SWITCH-TACT;12V,50MA,160GF+-50GF,6X6MM,SPS	

Location no.	Code no.	Description & Specifiation	Remarks
USW23	3404-000165	SWITCH-TACT;12V,50MA,160GF+-50GF,6X6MM,SPS	
USW24	3404-000165	SWITCH-TACT;12V,50MA,160GF+-50GF,6X6MM,SPS	
USW25	3404-000165	SWITCH-TACT;12V,50MA,160GF+-50GF,6X6MM,SPS	
USW26	3404-000165	SWITCH-TACT;12V,50MA,160GF+-50GF,6X6MM,SPS	
USW3	3404-000165	SWITCH-TACT;12V,50MA,160GF+-50GF,6X6MM,SPS	
USW4	3404-000165	SWITCH-TACT;12V,50MA,160GF+-50GF,6X6MM,SPS	
USW5	3404-000165	SWITCH-TACT;12V,50MA,160GF+-50GF,6X6MM,SPS	
USW6	3404-000165	SWITCH-TACT;12V,50MA,160GF+-50GF,6X6MM,SPS	
USW7	3404-000165	SWITCH-TACT;12V,50MA,160GF+-50GF,6X6MM,SPS	
USW8	3404-000165	SWITCH-TACT;12V,50MA,160GF+-50GF,6X6MM,SPS	
USW9	3404-000165	SWITCH-TACT;12V,50MA,160GF+-50GF,6X6MM,SPS	
	AH97-00034A	ASSY-DECK CASSETTE;AUTO-STOP S.S,MAX900,AMF	
	AH39-20560N	LEAD CONNECTOR-ASSY;-,5264,-,17P,400MM,1007#26	
	AH59-20005X	DECK-CASSETTE;YN21ZSW-77,MAX900,DC12V,DOUBLE	
	G3V1	**RADIO CD PLATER;**	
	AH91-60150A	ASSY-DECK CDP;CMS-D50SG6,CMS-300D,-	
	AH92-00005A	**ASSY-PCB-CD MAIN;G3VI,CD PACK**	**S.N.A.**
NQ1502	0501-000314	TR-SMALL SIGNAL;KSA812,PNP,150MW,SOT-23,TP,90-	
NIC928	0904-001159	IC-DSP;9286,8BIT,QFP,80P,-,1MHZ,TR,CM	
NIC925	1003-000179	IC-MOTOR DRIVER;KA9258D,SOP,28P,-,SINGLE,-,ST,	
NIC922	1204-001286	IC-ASP;KB9223,QFP,80P,-,PLASTIC,6V,20	
NR109	2007-000282	R-CHIP;100KOHM,5%,1/10W,DA,TP,2012	
NR203	2007-000282	R-CHIP;100KOHM,5%,1/10W,DA,TP,2012	
NR300	2007-000282	R-CHIP;100KOHM,5%,1/10W,DA,TP,2012	
NR57L	2007-000282	R-CHIP;100KOHM,5%,1/10W,DA,TP,2012	
NR57R	2007-000282	R-CHIP;100KOHM,5%,1/10W,DA,TP,2012	
NR606	2007-000282	R-CHIP;100KOHM,5%,1/10W,DA,TP,2012	
NR602	2007-000300	R-CHIP;10KOHM,5%,1/10W,DA,TP,2012	
NR603	2007-000300	R-CHIP;10KOHM,5%,1/10W,DA,TP,2012	
NR104	2007-000338	R-CHIP;120KOHM,5%,1/10W,DA,TP,2012	
NR107	2007-000338	R-CHIP;120KOHM,5%,1/10W,DA,TP,2012	
NR100	2007-000355	R-CHIP;12KOHM,5%,1/10W,DA,TP,2012	
NR120	2007-000355	R-CHIP;12KOHM,5%,1/10W,DA,TP,2012	
NR121	2007-000355	R-CHIP;12KOHM,5%,1/10W,DA,TP,2012	
NR204	2007-000355	R-CHIP;12KOHM,5%,1/10W,DA,TP,2012	
FREE	2007-000395	R-CHIP;150KOHM,5%,1/10W,DA,TP,2012	
NR103	2007-000395	R-CHIP;150KOHM,5%,1/10W,DA,TP,2012	
NR119	2007-000395	R-CHIP;150KOHM,5%,1/10W,DA,TP,2012	
NR400	2007-000409	R-CHIP;15KOHM,5%,1/10W,DA,TP,2012	
NR115	2007-000444	R-CHIP;180KOHM,5%,1/10W,DA,TP,2012	
NR10	2007-000468	R-CHIP;1KOHM,5%,1/10W,DA,TP,2012	
NR11	2007-000468	R-CHIP;1KOHM,5%,1/10W,DA,TP,2012	
NR12	2007-000468	R-CHIP;1KOHM,5%,1/10W,DA,TP,2012	
NR4	2007-000468	R-CHIP;1KOHM,5%,1/10W,DA,TP,2012	
NR5	2007-000468	R-CHIP;1KOHM,5%,1/10W,DA,TP,2012	
NR54L	2007-000468	R-CHIP;1KOHM,5%,1/10W,DA,TP,2012	
NR54R	2007-000468	R-CHIP;1KOHM,5%,1/10W,DA,TP,2012	
NR6	2007-000468	R-CHIP;1KOHM,5%,1/10W,DA,TP,2012	
NR604	2007-000468	R-CHIP;1KOHM,5%,1/10W,DA,TP,2012	
NR7	2007-000468	R-CHIP;1KOHM,5%,1/10W,DA,TP,2012	
NR8	2007-000468	R-CHIP;1KOHM,5%,1/10W,DA,TP,2012	
NR804	2007-000468	R-CHIP;1KOHM,5%,1/10W,DA,TP,2012	
SR3	2007-000468	R-CHIP;1KOHM,5%,1/10W,DA,TP,2012	
SR4	2007-000468	R-CHIP;1KOHM,5%,1/10W,DA,TP,2012	
NR114	2007-000477	R-CHIP;1MOHM,5%,1/10W,DA,TP,2012	
NR50L	2007-000586	R-CHIP;22KOHM,5%,1/10W,DA,TP,2012	
NR50R	2007-000586	R-CHIP;22KOHM,5%,1/10W,DA,TP,2012	
NR101	2007-000593	R-CHIP;22OHM,5%,1/10W,DA,TP,2012	
NR200	2007-000653	R-CHIP;27KOHM,5%,1/10W,DA,TP,2012	
NR52L	2007-000653	R-CHIP;27KOHM,5%,1/10W,DA,TP,2012	
NR52R	2007-000653	R-CHIP;27KOHM,5%,1/10W,DA,TP,2012	
NR201	2007-000686	R-CHIP;3.3KOHM,5%,1/10W,DA,TP,2012	
NR202	2007-000686	R-CHIP;3.3KOHM,5%,1/10W,DA,TP,2012	
NR105	2007-000830	R-CHIP;39KOHM,5%,1/10W,DA,TP,2012	
NR995	2007-000830	R-CHIP;39KOHM,5%,1/10W,DA,TP,2012	
NR996	2007-000830	R-CHIP;39KOHM,5%,1/10W,DA,TP,2012	
NR997	2007-000830	R-CHIP;39KOHM,5%,1/10W,DA,TP,2012	
NR998	2007-000830	R-CHIP;39KOHM,5%,1/10W,DA,TP,2012	
NR53L	2007-000872	R-CHIP;4.7KOHM,5%,1/10W,DA,TP,2012	
NR53R	2007-000872	R-CHIP;4.7KOHM,5%,1/10W,DA,TP,2012	
NR55L	2007-000872	R-CHIP;4.7KOHM,5%,1/10W,DA,TP,2012	
NR55R	2007-000872	R-CHIP;4.7KOHM,5%,1/10W,DA,TP,2012	
SR2	2007-000872	R-CHIP;4.7KOHM,5%,1/10W,DA,TP,2012	
NR117	2007-000898	R-CHIP;430Kohm,5%,1/10W,DA,TP,2012	
NR108	2007-000941	R-CHIP;47KOHM,5%,1/10W,DA,TP,2012	
NR111	2007-000941	R-CHIP;47KOHM,5%,1/10W,DA,TP,2012	
NR112	2007-001039	R-CHIP;56KOHM,5%,1/10W,DA,TP,2012	
NR116	2007-001195	R-CHIP;820KOHM,5%,1/10W,DA,TP,2012	
NR994	2007-001208	R-CHIP;82KOHM,5%,1/10W,DA,TP,2012	
NR999	2007-001208	R-CHIP;82KOHM,5%,1/10W,DA,TP,2012	
	2007-001216	R-CHIP;82OHM,5%,1/10W,DA,TP,2012	
NC107	2203-000199	C-CERAMIC,CHIP;100nF,79.8,50V,Z5U,TP,2012,-	
NC108	2203-000199	C-CERAMIC,CHIP;100nF,79.8,50V,Z5U,TP,2012,-	
NC119	2203-000199	C-CERAMIC,CHIP;100nF,79.8,50V,Z5U,TP,2012,-	
NC120	2203-000199	C-CERAMIC,CHIP;100nF,79.8,50V,Z5U,TP,2012,-	
NC121	2203-000199	C-CERAMIC,CHIP;100nF,79.8,50V,Z5U,TP,2012,-	
NC600	2203-000199	C-CERAMIC,CHIP;100nF,79.8,50V,Z5U,TP,2012,-	
NC901	2203-000199	C-CERAMIC,CHIP;100nF,79.8,50V,Z5U,TP,2012,-	
NC1	2203-000260	C-CERAMIC,CHIP;10nF,10%,50V,X7R,TP,2012,-	
NC103	2203-000260	C-CERAMIC,CHIP;10nF,10%,50V,X7R,TP,2012,-	
NC112	2203-000260	C-CERAMIC,CHIP;10nF,10%,50V,X7R,TP,2012,-	
NC113	2203-000260	C-CERAMIC,CHIP;10nF,10%,50V,X7R,TP,2012,-	

Location no.	Code no.	Description & Specifiation	Remarks
NC116	2203-000260	C-CERAMIC,CHIP;10nF,10%,50V,X7R,TP,2012,-	
NC205	2203-000260	C-CERAMIC,CHIP;10nF,10%,50V,X7R,TP,2012,-	
NC502	2203-000260	C-CERAMIC,CHIP;10nF,10%,50V,X7R,TP,2012,-	
NC503	2203-000260	C-CERAMIC,CHIP;10nF,10%,50V,X7R,TP,2012,-	
NC504	2203-000260	C-CERAMIC,CHIP;10nF,10%,50V,X7R,TP,2012,-	
NC53L	2203-000260	C-CERAMIC,CHIP;10nF,10%,50V,X7R,TP,2012,-	
NC53R	2203-000260	C-CERAMIC,CHIP;10nF,10%,50V,X7R,TP,2012,-	
NC602	2203-000260	C-CERAMIC,CHIP;10nF,10%,50V,X7R,TP,2012,-	
NC800	2203-000260	C-CERAMIC,CHIP;10nF,10%,50V,X7R,TP,2012,-	
NC804	2203-000260	C-CERAMIC,CHIP;10nF,10%,50V,X7R,TP,2012,-	
NC905	2203-000260	C-CERAMIC,CHIP;10nF,10%,50V,X7R,TP,2012,-	
SC1	2203-000260	C-CERAMIC,CHIP;10nF,10%,50V,X7R,TP,2012,-	
SC2	2203-000260	C-CERAMIC,CHIP;10nF,10%,50V,X7R,TP,2012,-	
SC6	2203-000260	C-CERAMIC,CHIP;10nF,10%,50V,X7R,TP,2012,-	
NC190	2203-000335	C-CERAMIC,CHIP;12pF,5%,50V,NPO,TP,2012,2.0m	
NC117	2203-000477	C-CERAMIC,CHIP;1uF,+80-20%,16V,Y5V,TP,2012,-	
NC110	2203-000495	C-CERAMIC,CHIP;2.2nF,10%,50V,X7R,2012,-,TP	
NC118	2203-000787	C-CERAMIC,CHIP;330pF,5%,50V,NPO,TP,2012,-	
NC101	2203-000802	C-CERAMIC,CHIP;33nF,10%,50V,X7R,TP,2012,-	
NC111	2203-000802	C-CERAMIC,CHIP;33nF,10%,50V,X7R,TP,2012,-	
NC125	2203-000802	C-CERAMIC,CHIP;33nF,10%,50V,X7R,TP,2012,-	
NC100	2203-000892	C-CERAMIC,CHIP;4.7NF,10%,50V,X7R,TP,2012,-	
NC106	2203-000892	C-CERAMIC,CHIP;4.7NF,10%,50V,X7R,TP,2012,-	
NC124	2203-000919	C-CERAMIC,CHIP;470nF,+80-20%,16V,Y5V,TP,2012,	
NC204	2203-000919	C-CERAMIC,CHIP;470nF,+80-20%,16V,Y5V,TP,2012,	
NC200	2203-000979	C-CERAMIC,CHIP;47nF,10%,50V,X7R,TP,2012,-	
NC115	2203-001137	C-CERAMIC,CHIP;68nF,+80-20%,50V,Y5V,TP,2012,-	
NC104	2203-001537	C-CERAMIC,CHIP;1NF,10%,50V,X7R,TP,2012,-	
NC52L	2203-001537	C-CERAMIC,CHIP;1NF,10%,50V,X7R,TP,2012,-	
NC52R	2203-001537	C-CERAMIC,CHIP;1NF,10%,50V,X7R,TP,2012,-	
NC603	2203-001537	C-CERAMIC,CHIP;1NF,10%,50V,X7R,TP,2012,-	
NC903	2203-001537	C-CERAMIC,CHIP;1NF,10%,50V,X7R,TP,2012,-	
NC102	2203-001551	C-CERAMIC,CHIP;1.5NF,10%,50V,X7R,TP,2012,2MM	
NC201	2203-001551	C-CERAMIC,CHIP;1.5NF,10%,50V,X7R,TP,2012,2MM	
NC202	2203-001619	C-CERAMIC,CHIP;27PF,5%,50V,NPO,TP,2012,2MM	
NC203	2203-001619	C-CERAMIC,CHIP;27PF,5%,50V,NPO,TP,2012,2MM	
NL105	3301-000325	CORE-FERRITE BEAD;AB,3.2x2.5x1.3mm,-,-	
SIC1	1003-001162	IC-MOTOR DRIVER;KA3082,SIP,10PIN,25MIL,DOUBLE,	
SIC2	1003-001162	IC-MOTOR DRIVER;KA3082,SIP,10PIN,25MIL,DOUBLE,	
NXF100	2802-000211	RESONATOR-CERAMIC;16.93MHZ,0.5%,TP,10.0X5.0X10.0	
SCW5	3708-001131	CONNECTOR-FPC/FC/PIC;5P,1.25mm,STRAIGHT,SN	
NCW100	3708-001312	CONNECTOR-FPC/FC/PIC;16P,1mm,STRAIGHT,SN	
	3711-000906	CONNECTOR-HEADER;BOX,3P,1R,2mm,ANGLE,SN	
SCW1	3711-002579	CONNECTOR-HEADER;WALL,22P,1R,2.5MM,ANGLE,	
SCW7	3711-003379	CONNECTOR-HEADER;NOWALL,3P,1R,2.5MM,STRAIGHT,SN	
NCW101	AH39-20025S	LEAD-CONNECTOR,ASSY;-,51004-08,35023-08,8P,300MM,1	
NCW102	AH39-20561P	LEAD CONNECTOR-ASSY;-,5295,PHR,6P,150mm,1007#28	
ND200	0401-000101	DIODE-SWITCHING;1N4148,100V,200mA,DO-35,TP	
ND201	0401-000101	DIODE-SWITCHING;1N4148,100V,200mA,DO-35,TP	
ND202	0401-000101	DIODE-SWITCHING;1N4148,100V,200mA,DO-35,TP	
ND203	0401-000101	DIODE-SWITCHING;1N4148,100V,200mA,DO-35,TP	
SZD1	0403-000352	DIODE-ZENER;UZ4.7BM,4.7V,4.4-5.0V,500MW,DO	
SZD2	0403-000361	DIODE-ZENER;UZ6.2BSB,6.2V,5.99-6.24V,50	
NQ1501	0501-000610	TR-SMALL SIGNAL;KSA928A-Y,PNP,1W,TO-92L,TP,160	
SR1	2001-000027	R-CARBON;100ohm,5%,1/4W,AA,TP,2.4x6.4mm	
NR106	2001-000319	R-CARBON;120Kohm,5%,1/8W,AA,TP,1.8x3.2m	
NR1	2001-000429	R-CARBON;1KOHM,5%,1/8W,AA,TP,-	
NR2	2001-000429	R-CARBON;1KOHM,5%,1/8W,AA,TP,-	
NR3	2001-000429	R-CARBON;1KOHM,5%,1/8W,AA,TP,-	
NR113	2001-000977	R-CARBON;8.2Kohm,5%,1/8W,AA,TP,1.8x3.2m	
NR555	2008-000141	R-FUSIBLE;2.2ohm,5%,1/4W,AA,TP,2.6x6.7mm	
NC400	2202-000243	C-CERAMIC,MLC-AXIAL;33PF,5%,50V,SL,3.5X19,-,TP	
NC300	2202-000796	C-CERAMIC,MLC-AXIAL;1nF,10%,50V,Y5P,TP,3.5x19,-	
NC117	2301-000389	C-FILM,PEF;150nF,5%,50V,TP,12.5x15x7.5,7m	
NC105	2401-000240	C-AL;100uF,20%,10V,GP,TP,5x11,5	
NC501	2401-000240	C-AL;100uF,20%,10V,GP,TP,5x11,5	
NC702	2401-000240	C-AL;100uF,20%,10V,GP,TP,5x11,5	
NC904	2401-000240	C-AL;100uF,20%,10V,GP,TP,5x11,5	
SC14	2401-000240	C-AL;100uF,20%,10V,GP,TP,5x11,5	
NC114	2401-000419	C-AL;10UF,20%,16V,GP,-,4X7,5	
NC301	2401-000778	C-AL;220uF,20%,10V,GP,6.3x11,2.5mm,	
NC700	2401-000778	C-AL;220uF,20%,10V,GP,6.3x11,2.5mm,	
NC701	2401-000778	C-AL;220uF,20%,10V,GP,6.3x11,2.5mm,	
SC5	2401-000795	C-AL;220UF,20%,16V,GP,-,8X11.5,3.5M	
NC703	2401-001102	C-AL;330UF,20%,16V,GP,TP,8X12,5	
NC122	2401-001952	C-AL;4.7UF,20%,50V,-,TP,6.3X7,5	
NC50L	2401-001952	C-AL;4.7UF,20%,50V,-,TP,6.3X7,5	
NC50R	2401-001952	C-AL;4.7UF,20%,50V,-,TP,6.3X7,5	
NC54	2401-001952	C-AL;4.7UF,20%,50V,-,TP,6.3X7,5	
NC55L	2401-001952	C-AL;4.7UF,20%,50V,-,TP,6.3X7,5	
NC55R	2401-001952	C-AL;4.7UF,20%,50V,-,TP,6.3X7,5	
NL101	2701-000111	INDUCTOR-AXIAL;100uH,10%,2.5x3.4mm	
NL102	2701-000111	INDUCTOR-AXIAL;100uH,10%,2.5x3.4mm	
NL100	2701-000114	INDUCTOR-AXIAL;10uH,10%,2.5x3.4mm	
SL1	2701-000179	INDUCTOR-AXIAL;33uH,10%,4.2x9.8mm	
NL300	3301-000297	CORE-FERRITE BEAD;AA,3.6X1.2X5.7MM,1400,2900G	
NL301	3301-000297	CORE-FERRITE BEAD;AA,3.6X1.2X5.7MM,1400,2900G	
NL302	3301-000297	CORE-FERRITE BEAD;AA,3.6X1.2X5.7MM,1400,2900G	
NIC05	AC14-12001G	IC;KA78L05,T,-	
SCO4	AC14-12001G	IC;KA78L05,T,-	
	AJ59-20150T	DECK-CDP;CMS-300,-,-,-,-	
	PS910E/AMF	SPEAKER-SYSTEM;MAX910	

Location no.	Code no.	Description & Specification	Remarks

**** MAX929/930/936 Parts List ****

	AH39-10002L	POWER CORD;CP2,KLCE-2F,2.15M,5239,VDE
	AH59-20005U	DECK-CASSETTE;ADR2115SW3,MAX920/930,DC12

AH90-10752Y ASSY-PCB-TUNER;MAX900,CE+RDS BAND S.N.A.

TFL4	14529-304-610	FILTER CERAMIC;AHCM2-450BL
TX1	2801-000734	CRYSTAL-UNIT;7.2MHZ,50PPM,28-AAM,12PF,30OHM
TFL2	2903-000105	FILTER-CERAMIC;BP,10.7MHZ+-25KHZ,180KHZ+-50KH
TWA1	3710-001421	CONNECTOR-SOCKET;14P,1R,2mm,ANGLE,SN
TJ2	3711-000814	CONNECTOR-HEADER;BOX,2P,1R,2.5mm,ANGLE,SN
HIC1	AH14-10007G	IC;LC72131,DIP,STICK PLL
TIC1	AH14-10008B	IC;LA1837,DIP,RF+MPX
TLPF1	AH26-00005A	TRANS-IF;-,LKS75M00-X000264-0,LOW PASS FILTER,-,7
TLPF2	AH26-00005A	TRANS-IF;-,LKS75M00-X000264-0,LOW PASS FILTER,-,7
TL2	AH26-10001E	TRANS-IF;KS940228-09,-,-,7.6X12.0,-,450KHZ,BULK,
TL3	AH26-10020A	TRANS-DET;-,7KLL,DET,-,7.8MM,91PF,11.32M
TC39	AH61-40022A	STUD-TAP;SPC1,T0.5,BT2,-,-,
RZD1	0403-000393	DIODE-ZENER;UZP5.1B,5.1V,4.8-5.4V,1W,DO-41
RR1	2001-000118	R-CARBON(S);180ohm,5%,1/2W,AA,TP,2.4x6.4mm
RR3	2001-000429	R-CARBON;1KOHM,5%,1/8W,AA,TP,-
RR4	2001-000429	R-CARBON;1KOHM,5%,1/8W,AA,TP,-
RR5	2001-000429	R-CARBON;1KOHM,5%,1/8W,AA,TP,-
RR2	2007-000290	R-CHIP;100OHM,5%,1/10W,DA,TP,2012
RC9	2202-000796	C-CERAMIC,MLC-AXIAL;1nF,10%,50V,Y5P,TP,3.5x19,-
RC2	2203-000260	C-CERAMIC,CHIP;10nF,10%,50V,X7R,TP,2012,-
RC7	2203-000979	C-CERAMIC,CHIP;47nF,10%,50V,X7R,TP,2012,-
RC8	2203-001058	C-CERAMIC,CHIP;560pF,5%,50V,NPO,2012,-,TP
RC4	2203-001524	C-CERAMIC,CHIP;47pF,5%,50V,NPO,TP,2012,-
RC5	2203-001524	C-CERAMIC,CHIP;47pF,5%,50V,NPO,TP,2012,-
RC1	2401-000907	C-AL;22UF,20%,16V,GP,-,5X11,2MM
RC6	2401-002180	C-AL;2.2UF,20%,50V,GP,TP,5X11,5MM
RX1	2801-003601	CRYSTAL-UNIT;4.332MHz,30ppm,28-AAM,30pF,
RIC1	AH14-10008E	IC;BU1923F,SOP,+5V
TR19	2007-000282	R-CHIP;100KOHM,5%,1/10W,DA,TP,2012
TR45	2007-000282	R-CHIP;100KOHM,5%,1/10W,DA,TP,2012
TR47	2007-000282	R-CHIP;100KOHM,5%,1/10W,DA,TP,2012
TR49	2007-000282	R-CHIP;100KOHM,5%,1/10W,DA,TP,2012
TR24	2007-000290	R-CHIP;100OHM,5%,1/10W,DA,TP,2012
TR43	2007-000290	R-CHIP;100OHM,5%,1/10W,DA,TP,2012
TR2	2007-000300	R-CHIP;10KOHM,5%,1/10W,DA,TP,2012
TR21	2007-000300	R-CHIP;10KOHM,5%,1/10W,DA,TP,2012
TR22	2007-000300	R-CHIP;10KOHM,5%,1/10W,DA,TP,2012
TR46	2007-000300	R-CHIP;10KOHM,5%,1/10W,DA,TP,2012
TR48	2007-000300	R-CHIP;10KOHM,5%,1/10W,DA,TP,2012
TR50	2007-000300	R-CHIP;10KOHM,5%,1/10W,DA,TP,2012
TR53	2007-000300	R-CHIP;10KOHM,5%,1/10W,DA,TP,2012
TR54	2007-000300	R-CHIP;10KOHM,5%,1/10W,DA,TP,2012
TR56	2007-000300	R-CHIP;10KOHM,5%,1/10W,DA,TP,2012
TR10	2007-000308	R-CHIP;10OHM,5%,1/10W,DA,TP,2012
TR20	2007-000409	R-CHIP;15KOHM,5%,1/10W,DA,TP,2012
TR28	2007-000457	R-CHIP;18KOHM,5%,1/10W,DA,TP,2012
TR52	2007-000468	R-CHIP;1KOHM,5%,1/10W,DA,TP,2012
TR9	2007-000468	R-CHIP;1KOHM,5%,1/10W,DA,TP,2012
TR35	2007-000493	R-CHIP;2.2KOHM,5%,1/10W,DA,TP,2012
TR36	2007-000493	R-CHIP;2.2KOHM,5%,1/10W,DA,TP,2012
TR40	2007-000493	R-CHIP;2.2KOHM,5%,1/10W,DA,TP,2012
TR7	2007-000518	R-CHIP;2.7KOHM,5%,1/10W,DA,TP,2012
TR11	2007-000572	R-CHIP;220OHM,5%,1/10W,DA,TP,2012
TR15	2007-000586	R-CHIP;22KOHM,5%,1/10W,DA,TP,2012
TR12	2007-000686	R-CHIP;3.3KOHM,5%,1/10W,DA,TP,2012
TR29	2007-000686	R-CHIP;3.3KOHM,5%,1/10W,DA,TP,2012
TR23	2007-000710	R-CHIP;3.9KOHM,5%,1/10W,DA,TP,2012
TR8	2007-000822	R-CHIP;390OHM,5%,1/10W,DA,TP,2012
TR4	2007-000872	R-CHIP;4.7KOHM,5%,1/10W,DA,TP,2012
TR51	2007-000872	R-CHIP;4.7KOHM,5%,1/10W,DA,TP,2012
TR17	2007-000981	R-CHIP;5.6KOHM,5%,1/10W,DA,TP,2012
TR37	2007-000981	R-CHIP;5.6KOHM,5%,1/10W,DA,TP,2012
TR6	2007-001033	R-CHIP;560OHM,5%,1/8W,DA,TP,3216
TR25	2007-001043	R-CHIP;56OHM,5%,1/10W,DA,TP,2012
TR27	2007-001071	R-CHIP;6.8KOHM,5%,1/10W,DA,TP,2012
TR38	2007-001177	R-CHIP;8.2KOHM,5%,1/10W,DA,TP,2012
TR44	2007-001177	R-CHIP;8.2KOHM,5%,1/10W,DA,TP,2012
TC48	2202-000807	C-CERAMIC,MLC-AXIAL;22NF,+80-20%,25V,Y5V,TP,3.5X19
TC41	2203-000239	C-CERAMIC,CHIP;100pF,5%,50V,NPO,TP,2012,-
TC20	2203-000260	C-CERAMIC,CHIP;10nF,10%,50V,X7R,TP,2012,-
TC28	2203-000260	C-CERAMIC,CHIP;10nF,10%,50V,X7R,TP,2012,-
TC29	2203-000260	C-CERAMIC,CHIP;10nF,10%,50V,X7R,TP,2012,-
TC3	2203-000260	C-CERAMIC,CHIP;10nF,10%,50V,X7R,TP,2012,-
TC44	2203-000260	C-CERAMIC,CHIP;10nF,10%,50V,X7R,TP,2012,-
TC7	2203-000429	C-CERAMIC,CHIP;18pF,5%,50V,NPO,TP,2012,-
TC1	2203-000609	C-CERAMIC,CHIP;22nF,10%,50V,X7R,TP,2012,-
TC5	2203-000609	C-CERAMIC,CHIP;22nF,10%,50V,X7R,TP,2012,-
TC33	2203-000844	C-CERAMIC,CHIP;39nF,10%,50V,X7R,TP,2012,-
TC10	2203-000979	C-CERAMIC,CHIP;47nF,10%,50V,X7R,TP,2012,-
TC13	2203-000979	C-CERAMIC,CHIP;47nF,10%,50V,X7R,TP,2012,-
TC15	2203-000979	C-CERAMIC,CHIP;47nF,10%,50V,X7R,TP,2012,-
TC35	2203-000979	C-CERAMIC,CHIP;47nF,10%,50V,X7R,TP,2012,-
TC45	2203-000979	C-CERAMIC,CHIP;47nF,10%,50V,X7R,TP,2012,-
TC6	2203-000979	C-CERAMIC,CHIP;47nF,10%,50V,X7R,TP,2012,-
TC61	2203-001105	C-CERAMIC,CHIP;6.8nF,10%,50V,X7R,TP,2012,-
TC62	2203-001105	C-CERAMIC,CHIP;6.8nF,10%,50V,X7R,TP,2012,-
TC32	2203-001132	C-CERAMIC,CHIP;680pF,5%,50V,NPO,2012,-,TP
TC2	2203-001517	C-CERAMIC,CHIP;15pF,5%,50V,NPO,TP,2012,-
TC63	2203-001551	C-CERAMIC,CHIP;1.5NF,10%,50V,X7R,TP,2012,2MM
TC64	2203-001551	C-CERAMIC,CHIP;1.5NF,10%,50V,X7R,TP,2012,2MM
TC50	2203-001611	C-CERAMIC,CHIP;22pF,5%,50V,NPO,TP,2012,2mm
TC51	2203-001611	C-CERAMIC,CHIP;22pF,5%,50V,NPO,TP,2012,2mm
TD1	0401-000101	DIODE-SWITCHING;1N4148,100V,200mA,DO-35,TP
TD2	0401-000101	DIODE-SWITCHING;1N4148,100V,200mA,DO-35,TP
TD3	0401-000101	DIODE-SWITCHING;1N4148,100V,200mA,DO-35,TP
TD4	0401-000101	DIODE-SWITCHING;1N4148,100V,200mA,DO-35,TP
TD5	0401-000101	DIODE-SWITCHING;1N4148,100V,200mA,DO-35,TP
TD6	0401-000101	DIODE-SWITCHING;1N4148,100V,200mA,DO-35,TP
TZD1	0403-000367	DIODE-ZENER;UZ7.5BSC,7.5V,7.33-7.64V,500mW
TZD2	0403-000393	DIODE-ZENER;UZP5.1B,5.1V,4.8-5.4V,1W,DO-41
TQ4	0501-000294	TR-SMALL SIGNAL;KSA708-Y,PNP,800mW,TO-92,TP,12
TQ2	0501-000392	TR-SMALL SIGNAL;KSC838-O,NPN,250mW,TO-92,-,70-
TQ3	0501-000392	TR-SMALL SIGNAL;KSC838-O,NPN,250mW,TO-92,-,70-
TQ1	0501-000398	TR-SMALL SIGNAL;KSC945,NPN,250mW,TO-92,TP,120-
TQ5	0501-000398	TR-SMALL SIGNAL;KSC945,NPN,250mW,TO-92,TP,120-
TQ6	0501-000398	TR-SMALL SIGNAL;KSC945,NPN,250mW,TO-92,TP,120-
TQ7	0501-000398	TR-SMALL SIGNAL;KSC945,NPN,250mW,TO-92,TP,120-
TR30	2001-000117	R-CARBON(S);68ohm,5%,1/2W,AA,TP,2.4x6.4mm
TR44	2001-000118	R-CARBON(S);180ohm,5%,1/2W,AA,TP,2.4x6.4mm
TR58	2001-000273	R-CARBON;100KOHM,5%,1/8W,AA,TP,-
TR5	2001-000281	R-CARBON;100ohm,5%,1/8W,AA,TP,1.8x3.2mm
TR39	2001-000290	R-CARBON;10KOHM,5%,1/8W,AA,TP,-
TR57	2001-000290	R-CARBON;10KOHM,5%,1/8W,AA,TP,-
TR55	2001-000429	R-CARBON;1KOHM,5%,1/8W,AA,TP,-
TR18	2001-000449	R-CARBON;2.2Kohm,5%,1/8W,AA,TP,1.8x3.2m
TR3	2001-000449	R-CARBON;2.2Kohm,5%,1/8W,AA,TP,1.8x3.2m
TR13	2001-000515	R-CARBON;220ohm,5%,1/8W,AA,TP,1.8x3.2mm
TR16	2001-000527	R-CARBON;22ohm,5%,1/8W,AA,TP,1.8x3.2mm
TR32	2001-000591	R-CARBON;3.3KOHM,5%,1/8W,AA,TP,-
TR34	2001-000591	R-CARBON;3.3KOHM,5%,1/8W,AA,TP,-
TR61	2001-000591	R-CARBON;3.3KOHM,5%,1/8W,AA,TP,-
TR62	2001-000591	R-CARBON;3.3KOHM,5%,1/8W,AA,TP,-
TR42	2001-000734	R-CARBON;4.7KOHM,5%,1/8W,AA,TP,-
TSR1	2103-000290	VR-SEMI;20Kohm,30%,1/10W,TOP
TC14	2201-000565	C-CERAMIC,DISC;47nF,20%,50V,Y5V,12.5x4.0mm,5mm,TP
TC39	2201-000565	C-CERAMIC,DISC;47nF,20%,50V,Y5V,12.5x4.0mm,5mm,TP
TC40	2202-000796	C-CERAMIC,MLC-AXIAL;1nF,10%,50V,Y5P,TP,3.5x19,-
TC42	2202-000796	C-CERAMIC,MLC-AXIAL;1nF,10%,50V,Y5P,TP,3.5x19,-
TC21	2401-000244	C-AL;100uF,20%,10V,GP,TP,6.3x7,5
TC46	2401-000244	C-AL;100uF,20%,10V,GP,TP,6.3x7,5
TC12	2401-000419	C-AL;10UF,20%,16V,GP,-,4X7,5
TC26	2401-000419	C-AL;10UF,20%,16V,GP,-,4X7,5
TC27	2401-000419	C-AL;10UF,20%,16V,GP,-,4X7,5
TC30	2401-000419	C-AL;10UF,20%,16V,GP,-,4X7,5
TC34	2401-000907	C-AL;22UF,20%,16V,GP,-,5X11,2MM
TC36	2401-001022	C-AL;3.3UF,20%,50V,GP,-,5X11,2MM
TC38	2401-001164	C-AL;33UF,20%,16V,GP,-,5X11,2MM
TC11	2401-001912	C-AL;1uF,20%,50V,GP,5x11mm,2mm,BK
TC17	2401-001912	C-AL;1uF,20%,50V,GP,5x11mm,2mm,BK
TC19	2401-001912	C-AL;1uF,20%,50V,GP,5x11mm,2mm,BK
TC16	2401-001954	C-AL;4.7UF,20%,50V,GP,BK,5X11MM,5
TC23	2401-001954	C-AL;4.7UF,20%,50V,GP,BK,5X11MM,5
TC25	2401-001954	C-AL;4.7UF,20%,50V,GP,BK,5X11MM,5
TC18	2401-001968	C-AL;470NF,20%,50V,GP,TP,5X11MM,5
TC43	2401-001968	C-AL;470NF,20%,50V,GP,TP,5X11MM,5
TC4	2401-001975	C-AL;47UF,20%,16V,GP,TP,5X11MM,5
TC9	2401-001975	C-AL;47UF,20%,16V,GP,TP,5X11MM,5

AH94-10015R ASSY-PCB,CD,MANU;CMS55HK/E, S.N.A.

	0405-000137	DIODE-VARACTOR;KV-1260,20V,100NA,T0-92S
	2001-000331	R-CARBON;12KOHM,5%,1/8W,AA,TP,-
	2001-000522	R-CARBON;22Kohm,5%,1/8W,AA,TP,1.8x3.2mm
	2201-000928	C-CERAMIC,DISC;2.7NF,20%,16V,Y5R,TP,3.5X1.9,-
	2903-000102	FILTER-CERAMIC;BP,10.7MHZ+-25KHZ,150KHZ+-50KH
,	2903-000102	FILTER-CERAMIC;BP,10.7MHZ+-25KHZ,150KHZ+-50KH
	3716-000210	TERMINAL-BLOCK;-,-,-,60V,7A
	AH27-00007A	COIL-OSC;LKS7FB00-0060BLO-0,-,LW OSC
	AH27-00008A	COIL-OSC;LKS75M00-0060LMO-0,-,MW OSC
	AH27-00011A	COIL-OSC;LKS75M00-X000262-0,-,LW ANT
	AH27-00012A	COIL-OSC;LKS75M00-X000263-0,365UH,MW ANT
	AH40-10025S	TUNER-FM;KST-F404VA-1,4G,75ohm

AH92-00036A ASSY-PCB-FRONT COM;MAX930,FRONT S.N.A.

UX2	2801-001394	CRYSTAL-UNIT;32.768KHz,20ppm,28-AAY,12.5pF,
UX1	2802-000181	RESONATOR-CERAMIC;6MHZ,0.3%,BK,9.0X4.0X7.5MM
VR	3406-001022	SWITCH-ROTARY;5V,0.5mA,24Pulse/no click,12mm
JOG	3406-001023	SWITCH-ROTARY;5V,0.5mA,24detent/click,12mm
UCW8	3708-000454	CONNECTOR-FPC/FC/PIC;22P,1.25MM,STRAIGHT,
UCW3	3710-001045	CONNECTOR-SOCKET;22P,1R,1.25MM,ANGLE,SN
	3710-001046	CONNECTOR-SOCKET;10P,1R,1.25MM,ANGLE,SN
UCW5	3711-000814	CONNECTOR-HEADER;BOX,2P,1R,2.5mm,ANGLE,SN
REM1	AC59-60060A	MODULE-REMOCON;GP1U281R,SHARP,38KHZ,-,-,-,-
	AH07-20046C	VF-MAX940 DISPLAY;SVA-12MM19,12 SEG,100X2
UIC1	AH09-00001A	IC-MICOM;LC866548V,100P,-,-,-
UIC3	AH14-10007D	IC;NJU3716M,SOP,STICK EXPANDER 16BIT
UCW6	AH39-00019A	LEAD-CONNECTOR ASSY;-,GT201-11,35023,11P,150MM,1007#28
UCW7	AH39-00020A	LEAD-CONNECTOR ASSY;-,GT201-13,35023,13P,150MM,1007#28

Location no.	Code no.	Description & Specification	Remarks
UCW1	AH39-20012W	LEAD-CONNECTOR ASS'Y;SC25,JC25,2P,150MM,1007#26	
GND	AH39-50001L	LEAD-FASTEN;RING,1007#24,200MM,BLK	
	AH61-20539A	HOLDER-VFD;-,ABS,94HB,BLK,-,MAX940	
UD1	0401-000101	DIODE-SWITCHING;1N4148,100V,200mA,DO-35,TP	
UD11	0401-000101	DIODE-SWITCHING;1N4148,100V,200mA,DO-35,TP	
UD16	0401-000101	DIODE-SWITCHING;1N4148,100V,200mA,DO-35,TP	
UD17	0401-000101	DIODE-SWITCHING;1N4148,100V,200mA,DO-35,TP	
UD18	0401-000101	DIODE-SWITCHING;1N4148,100V,200mA,DO-35,TP	
UD19	0401-000101	DIODE-SWITCHING;1N4148,100V,200mA,DO-35,TP	
UD2	0401-000101	DIODE-SWITCHING;1N4148,100V,200mA,DO-35,TP	
UD20	0401-000101	DIODE-SWITCHING;1N4148,100V,200mA,DO-35,TP	
UD22	0401-000101	DIODE-SWITCHING;1N4148,100V,200mA,DO-35,TP	
UD5	0401-000101	DIODE-SWITCHING;1N4148,100V,200mA,DO-35,TP	
UD12	0402-000127	DIODE-RECTIFIER;1N4002,100V,1A,DO-41,TP	
UD13	0402-000127	DIODE-RECTIFIER;1N4002,100V,1A,DO-41,TP	
UD14	0402-000127	DIODE-RECTIFIER;1N4002,100V,1A,DO-41,TP	
UD15	0402-000127	DIODE-RECTIFIER;1N4002,100V,1A,DO-41,TP	
UQ1	0501-000398	TR-SMALL SIGNAL;KSC945,NPN,250mW,TO-92,TP,120-	
UQ10	0501-000398	TR-SMALL SIGNAL;KSC945,NPN,250mW,TO-92,TP,120-	
UQ11	0501-000398	TR-SMALL SIGNAL;KSC945,NPN,250mW,TO-92,TP,120-	
UQ2	0501-000398	TR-SMALL SIGNAL;KSC945,NPN,250mW,TO-92,TP,120-	
UQ3	0501-000398	TR-SMALL SIGNAL;KSC945,NPN,250mW,TO-92,TP,120-	
UQ15	0501-000610	TR-SMALL SIGNAL;KSA928A-Y,PNP,1W,TO-92L,TP,160	
UQ16	0501-000610	TR-SMALL SIGNAL;KSA928A-Y,PNP,1W,TO-92L,TP,160	
UQ7	0501-000610	TR-SMALL SIGNAL;KSA928A-Y,PNP,1W,TO-92L,TP,160	
UQ12	0504-000118	TR-DIGITAL;KSR1003,NPN,300mW,22K-22K,TO-9	
UQ13	0504-000118	TR-DIGITAL;KSR1003,NPN,300mW,22K-22K,TO-9	
UQ14	0504-000118	TR-DIGITAL;KSR1003,NPN,300mW,22K-22K,TO-9	
UQ4	0504-000118	TR-DIGITAL;KSR1003,NPN,300mW,22K-22K,TO-9	
UQ5	0504-000118	TR-DIGITAL;KSR1003,NPN,300mW,22K-22K,TO-9	
UQ6	0504-000118	TR-DIGITAL;KSR1003,NPN,300mW,22K-22K,TO-9	
UQ8	0504-000122	TR-DIGITAL;KSR1009Y,NPN,300mW,4.7K,TO-92,	
UQ9	0504-000122	TR-DIGITAL;KSR1009Y,NPN,300mW,4.7K,TO-92,	
ULD17	0601-001218	LED;INVERTER,AMB,3mm,610nm	
ULD18	0601-001218	LED;INVERTER,AMB,3mm,610nm	
ULD19	0601-001238	LED;ROUND,RED,3.1mm,697nm	
UQ19	1203-000276	IC-POSI.FIXED REG.;7805,TO-220,3P,-,PLASTIC,4.8/5	
UR20	2001-000028	R-CARBON(S);100OHM,5%,1/2W,AA,TP,-	
UR21	2001-000028	R-CARBON(S);100OHM,5%,1/2W,AA,TP,-	
UR120	2001-000221	R-CARBON;1.2KOHM,5%,1/8W,AA,TP,-	
UR126	2001-000221	R-CARBON;1.2KOHM,5%,1/8W,AA,TP,-	
UR127	2001-000221	R-CARBON;1.2KOHM,5%,1/8W,AA,TP,-	
UR57	2001-000221	R-CARBON;1.2KOHM,5%,1/8W,AA,TP,-	
UR58	2001-000221	R-CARBON;1.2KOHM,5%,1/8W,AA,TP,-	
UR72	2001-000221	R-CARBON;1.2KOHM,5%,1/8W,AA,TP,-	
UR73	2001-000221	R-CARBON;1.2KOHM,5%,1/8W,AA,TP,-	
UR125	2001-000241	R-CARBON;1.5Kohm,5%,1/8W,AA,TP,1.8x3.2m	
UR26	2001-000241	R-CARBON;1.5Kohm,5%,1/8W,AA,TP,1.8x3.2m	
UR71	2001-000241	R-CARBON;1.5Kohm,5%,1/8W,AA,TP,1.8x3.2m	
UR124	2001-000258	R-CARBON;1.8KOHM,5%,1/8W,AA,TP,-	
UR25	2001-000258	R-CARBON;1.8KOHM,5%,1/8W,AA,TP,-	
UR67	2001-000258	R-CARBON;1.8KOHM,5%,1/8W,AA,TP,-	
UR116	2001-000273	R-CARBON;100KOHM,5%,1/8W,AA,TP,-	
UR122	2001-000273	R-CARBON;100KOHM,5%,1/8W,AA,TP,-	
UR123	2001-000273	R-CARBON;100KOHM,5%,1/8W,AA,TP,-	
UR28	2001-000273	R-CARBON;100KOHM,5%,1/8W,AA,TP,-	
UR29	2001-000273	R-CARBON;100KOHM,5%,1/8W,AA,TP,-	
UR36	2001-000273	R-CARBON;100KOHM,5%,1/8W,AA,TP,-	
UR61	2001-000273	R-CARBON;100KOHM,5%,1/8W,AA,TP,-	
UR65	2001-000273	R-CARBON;100KOHM,5%,1/8W,AA,TP,-	
UR69	2001-000273	R-CARBON;100KOHM,5%,1/8W,AA,TP,-	
UR79	2001-000273	R-CARBON;100KOHM,5%,1/8W,AA,TP,-	
UR10	2001-000290	R-CARBON;10KOHM,5%,1/8W,AA,TP,-	
UR11	2001-000290	R-CARBON;10KOHM,5%,1/8W,AA,TP,-	
UR111	2001-000290	R-CARBON;10KOHM,5%,1/8W,AA,TP,-	
UR112	2001-000290	R-CARBON;10KOHM,5%,1/8W,AA,TP,-	
UR115	2001-000290	R-CARBON;10KOHM,5%,1/8W,AA,TP,-	
UR12	2001-000290	R-CARBON;10KOHM,5%,1/8W,AA,TP,-	
UR18	2001-000290	R-CARBON;10KOHM,5%,1/8W,AA,TP,-	
UR30	2001-000290	R-CARBON;10KOHM,5%,1/8W,AA,TP,-	
UR32	2001-000290	R-CARBON;10KOHM,5%,1/8W,AA,TP,-	
UR35	2001-000290	R-CARBON;10KOHM,5%,1/8W,AA,TP,-	
UR55	2001-000290	R-CARBON;10KOHM,5%,1/8W,AA,TP,-	
UR56	2001-000290	R-CARBON;10KOHM,5%,1/8W,AA,TP,-	
UR6	2001-000290	R-CARBON;10KOHM,5%,1/8W,AA,TP,-	
UR60	2001-000290	R-CARBON;10KOHM,5%,1/8W,AA,TP,-	
UR62	2001-000290	R-CARBON;10KOHM,5%,1/8W,AA,TP,-	
UR63	2001-000290	R-CARBON;10KOHM,5%,1/8W,AA,TP,-	
UR68	2001-000290	R-CARBON;10KOHM,5%,1/8W,AA,TP,-	
UR7	2001-000290	R-CARBON;10KOHM,5%,1/8W,AA,TP,-	
UR8	2001-000290	R-CARBON;10KOHM,5%,1/8W,AA,TP,-	
UR9	2001-000290	R-CARBON;10KOHM,5%,1/8W,AA,TP,-	
UR98	2001-000290	R-CARBON;10KOHM,5%,1/8W,AA,TP,-	
UR99	2001-000290	R-CARBON;10KOHM,5%,1/8W,AA,TP,-	
UXR1	2001-000295	R-CARBON;10Mohm,5%,1/8W,AA,TP,1.8x3.2mm	
UR53	2001-000362	R-CARBON;150ohm,5%,1/8W,AA,TP,1.8x3.2mm	
UR70	2001-000362	R-CARBON;150ohm,5%,1/8W,AA,TP,1.8x3.2mm	
UR92	2001-000362	R-CARBON;150ohm,5%,1/8W,AA,TP,1.8x3.2mm	
UR33	2001-000397	R-CARBON;180Kohm,5%,1/8W,AA,TP,1.8x3.2m	
FREE	2001-000429	R-CARBON;1KOHM,5%,1/8W,AA,TP,-	
JW86	2001-000429	R-CARBON;1KOHM,5%,1/8W,AA,TP,-	
UR102	2001-000429	R-CARBON;1KOHM,5%,1/8W,AA,TP,-	
UR103	2001-000429	R-CARBON;1KOHM,5%,1/8W,AA,TP,-	
UR104	2001-000429	R-CARBON;1KOHM,5%,1/8W,AA,TP,-	
UR105	2001-000429	R-CARBON;1KOHM,5%,1/8W,AA,TP,-	
UR106	2001-000429	R-CARBON;1KOHM,5%,1/8W,AA,TP,-	
UR107	2001-000429	R-CARBON;1KOHM,5%,1/8W,AA,TP,-	
UR108	2001-000429	R-CARBON;1KOHM,5%,1/8W,AA,TP,-	
UR109	2001-000429	R-CARBON;1KOHM,5%,1/8W,AA,TP,-	
UR110	2001-000429	R-CARBON;1KOHM,5%,1/8W,AA,TP,-	
UR113	2001-000429	R-CARBON;1KOHM,5%,1/8W,AA,TP,-	
UR114	2001-000429	R-CARBON;1KOHM,5%,1/8W,AA,TP,-	
UR14	2001-000429	R-CARBON;1KOHM,5%,1/8W,AA,TP,-	
UR59	2001-000429	R-CARBON;1KOHM,5%,1/8W,AA,TP,-	
UR83	2001-000429	R-CARBON;1KOHM,5%,1/8W,AA,TP,-	
UR84	2001-000429	R-CARBON;1KOHM,5%,1/8W,AA,TP,-	
UR85	2001-000429	R-CARBON;1KOHM,5%,1/8W,AA,TP,-	
UR86	2001-000429	R-CARBON;1KOHM,5%,1/8W,AA,TP,-	
UR87	2001-000429	R-CARBON;1KOHM,5%,1/8W,AA,TP,-	
UR88	2001-000429	R-CARBON;1KOHM,5%,1/8W,AA,TP,-	
UR89	2001-000429	R-CARBON;1KOHM,5%,1/8W,AA,TP,-	
UR90	2001-000429	R-CARBON;1KOHM,5%,1/8W,AA,TP,-	
UR91	2001-000429	R-CARBON;1KOHM,5%,1/8W,AA,TP,-	
UR93	2001-000429	R-CARBON;1KOHM,5%,1/8W,AA,TP,-	
UR94	2001-000429	R-CARBON;1KOHM,5%,1/8W,AA,TP,-	
UR95	2001-000429	R-CARBON;1KOHM,5%,1/8W,AA,TP,-	
UR96	2001-000429	R-CARBON;1KOHM,5%,1/8W,AA,TP,-	
UR17	2001-000449	R-CARBON;2.2Kohm,5%,1/8W,AA,TP,1.8x3.2m	
UR66	2001-000449	R-CARBON;2.2Kohm,5%,1/8W,AA,TP,1.8x3.2m	
UR119	2001-000472	R-CARBON;2.7KOHM,5%,1/8W,AA,TP,-	
UR66	2001-000472	R-CARBON;2.7KOHM,5%,1/8W,AA,TP,-	
UR4	2001-000508	R-CARBON;220Kohm,5%,1/8W,AA,TP,1.8x3.2m	
UAR1	2001-000522	R-CARBON;22Kohm,5%,1/8W,AA,TP,1.8x3.2mm	
UR129	2001-000734	R-CARBON;4.7KOHM,5%,1/8W,AA,TP,-	
UR16	2001-000734	R-CARBON;4.7KOHM,5%,1/8W,AA,TP,-	
UR22	2001-000734	R-CARBON;4.7KOHM,5%,1/8W,AA,TP,-	
UR23	2001-000734	R-CARBON;4.7KOHM,5%,1/8W,AA,TP,-	
UR39	2001-000734	R-CARBON;4.7KOHM,5%,1/8W,AA,TP,-	
UR40	2001-000734	R-CARBON;4.7KOHM,5%,1/8W,AA,TP,-	
UR41	2001-000734	R-CARBON;4.7KOHM,5%,1/8W,AA,TP,-	
UR42	2001-000734	R-CARBON;4.7KOHM,5%,1/8W,AA,TP,-	
UR43	2001-000734	R-CARBON;4.7KOHM,5%,1/8W,AA,TP,-	
UR44	2001-000734	R-CARBON;4.7KOHM,5%,1/8W,AA,TP,-	
UR45	2001-000734	R-CARBON;4.7KOHM,5%,1/8W,AA,TP,-	
UR46	2001-000734	R-CARBON;4.7KOHM,5%,1/8W,AA,TP,-	
UR47	2001-000734	R-CARBON;4.7KOHM,5%,1/8W,AA,TP,-	
UR48	2001-000734	R-CARBON;4.7KOHM,5%,1/8W,AA,TP,-	
UR49	2001-000734	R-CARBON;4.7KOHM,5%,1/8W,AA,TP,-	
UR121	2001-000780	R-CARBON;470OHM,5%,1/8W,AA,TP,-	
UR5	2001-000793	R-CARBON;47ohm,5%,1/8W,AA,TP,1.8x3.2mm	
UR24	2001-000802	R-CARBON;5.6Kohm,5%,1/8W,AA,TP,1.8x3.2m	
UR100	2001-000924	R-CARBON;680ohm,5%,1/8W,AA,TP,1.8x3.2mm	
UR117	2001-000924	R-CARBON;680ohm,5%,1/8W,AA,TP,1.8x3.2mm	
UR118	2001-000924	R-CARBON;680ohm,5%,1/8W,AA,TP,1.8x3.2mm	
UR13	2001-000924	R-CARBON;680ohm,5%,1/8W,AA,TP,1.8x3.2mm	
UR37	2001-000924	R-CARBON;680ohm,5%,1/8W,AA,TP,1.8x3.2mm	
UR52	2001-000924	R-CARBON;680ohm,5%,1/8W,AA,TP,1.8x3.2mm	
UR54	2001-000924	R-CARBON;680ohm,5%,1/8W,AA,TP,1.8x3.2mm	
UR64	2001-000924	R-CARBON;680ohm,5%,1/8W,AA,TP,1.8x3.2mm	
UR97	2001-000924	R-CARBON;680ohm,5%,1/8W,AA,TP,1.8x3.2mm	
UR101	2001-000995	R-CARBON;820OHM,5%,1/8W,AA,TP,-	
UR128	2001-000995	R-CARBON;820OHM,5%,1/8W,AA,TP,-	
UR19	2001-000995	R-CARBON;820OHM,5%,1/8W,AA,TP,-	
UR34	2001-000995	R-CARBON;820OHM,5%,1/8W,AA,TP,-	
UR51	2001-000995	R-CARBON;820OHM,5%,1/8W,AA,TP,-	
UR74	2001-000995	R-CARBON;820OHM,5%,1/8W,AA,TP,-	
UR20	2003-000587	R-METAL OXIDE(S);22ohm,5%,1W,AA,TP,3.3x9mm	
UVR2	2103-000004	VR-SEMI;2Kohm,30%,1/10W,SIDE	
UC17	2201-000247	C-CERAMIC,DISC;15pF,5%,50V,CH,TP,5x3,5	
UC18	2201-000247	C-CERAMIC,DISC;15pF,5%,50V,CH,TP,5x3,5	
UC26	2201-000300	C-CERAMIC,DISC;1NF,20%,50V,Y5T,TP,5X3,5	
UC19	2201-000423	C-CERAMIC,DISC;27pF,5%,50V,NPO,TP,5x3,2.5	
UC20	2201-000423	C-CERAMIC,DISC;27pF,5%,50V,NPO,TP,5x3,2.5	
UC22	2201-000426	C-CERAMIC,DISC;27pF,5%,50V,SL,TP,5x3,5	
UC21	2201-000557	C-CERAMIC,DISC;470pF,10%,50V,SL,TP,8x3,5	
UC15	2201-000565	C-CERAMIC,DISC;47nF,20%,50V,Y5V,12.5x4.0mm,5mm,TP	
UC27	2201-000565	C-CERAMIC,DISC;47nF,20%,50V,Y5V,12.5x4.0mm,5mm,TP	
UC29	2202-000796	C-CERAMIC,MLC-AXIAL;1nF,10%,50V,Y5P,TP,3.5x19,-	
UC6	2202-000809	C-CERAMIC,MLC-AXIAL;3.3NF,20%,16V,Y5R,TP,3.5X19,-	
UC13	2202-000854	C-CERAMIC,MLC-AXIAL;47NF,30%,50V,Y5R,TP,3.5X1.9,-	
UC14	2202-000854	C-CERAMIC,MLC-AXIAL;47NF,30%,50V,Y5R,TP,3.5X1.9,-	
UC2	2202-000854	C-CERAMIC,MLC-AXIAL;47NF,30%,50V,Y5R,TP,3.5X1.9,-	
UC12	2401-000240	C-AL;100uF,20%,10V,GP,TP,5x11,5	
UC16	2401-000475	C-AL;10UF,20%,50V,GP,-,5X11,2MM	
UC28	2401-000475	C-AL;10UF,20%,50V,GP,-,5X11,2MM	
UC23	2401-000918	C-AL;22uF,20%,16V,GP,-,6.3x7,5	
UC24	2401-000918	C-AL;22uF,20%,16V,GP,-,6.3x7,5	
UC10	2401-001511	C-AL;47UF,20%,16V,GP,-,6X7,5	
UC8	2401-001511	C-AL;47UF,20%,16V,GP,-,6X7,5	
UC5	2401-001895	C-AL;100uF,20%,16V,GP,6.3x11mm,2.5m	
UC25	2401-001917	C-AL;1UF,20%,50V,-,TP,5X7MM,5	
UC7	2401-001917	C-AL;1UF,20%,50V,-,TP,5X7MM,5	
UC4	2401-001931	C-AL;220NF,20%,50V,-,TP,4X7MM,5	
UC11	2401-001952	C-AL;4.7UF,20%,50V,-,TP,6.3X7,5	
UC3	2401-001952	C-AL;4.7UF,20%,50V,-,TP,6.3X7,5	
UC9	2401-001952	C-AL;4.7UF,20%,50V,-,TP,6.3X7,5	

Location no.	Code no.	Description & Specification	Remarks
UC1	2409-000123	C-EDL;47000UF,4UA,5.5V,-,BK,-,5MM	
SW1	3404-000165	SWITCH-TACT;12V,50MA,160GF+-50GF,6X6MM,SPS	
SW10	3404-000165	SWITCH-TACT;12V,50MA,160GF+-50GF,6X6MM,SPS	
SW11	3404-000165	SWITCH-TACT;12V,50MA,160GF+-50GF,6X6MM,SPS	
SW12	3404-000165	SWITCH-TACT;12V,50MA,160GF+-50GF,6X6MM,SPS	
SW13	3404-000165	SWITCH-TACT;12V,50MA,160GF+-50GF,6X6MM,SPS	
SW14	3404-000165	SWITCH-TACT;12V,50MA,160GF+-50GF,6X6MM,SPS	
SW15	3404-000165	SWITCH-TACT;12V,50MA,160GF+-50GF,6X6MM,SPS	
SW16	3404-000165	SWITCH-TACT;12V,50MA,160GF+-50GF,6X6MM,SPS	
SW17	3404-000165	SWITCH-TACT;12V,50MA,160GF+-50GF,6X6MM,SPS	
SW18	3404-000165	SWITCH-TACT;12V,50MA,160GF+-50GF,6X6MM,SPS	
SW19	3404-000165	SWITCH-TACT;12V,50MA,160GF+-50GF,6X6MM,SPS	
SW2	3404-000165	SWITCH-TACT;12V,50MA,160GF+-50GF,6X6MM,SPS	
SW20	3404-000165	SWITCH-TACT;12V,50MA,160GF+-50GF,6X6MM,SPS	
SW21	3404-000165	SWITCH-TACT;12V,50MA,160GF+-50GF,6X6MM,SPS	
SW22	3404-000165	SWITCH-TACT;12V,50MA,160GF+-50GF,6X6MM,SPS	
SW23	3404-000165	SWITCH-TACT;12V,50MA,160GF+-50GF,6X6MM,SPS	
SW24	3404-000165	SWITCH-TACT;12V,50MA,160GF+-50GF,6X6MM,SPS	
SW25	3404-000165	SWITCH-TACT;12V,50MA,160GF+-50GF,6X6MM,SPS	
SW26	3404-000165	SWITCH-TACT;12V,50MA,160GF+-50GF,6X6MM,SPS	
SW27	3404-000165	SWITCH-TACT;12V,50MA,160GF+-50GF,6X6MM,SPS	
SW28	3404-000165	SWITCH-TACT;12V,50MA,160GF+-50GF,6X6MM,SPS	
SW3	3404-000165	SWITCH-TACT;12V,50MA,160GF+-50GF,6X6MM,SPS	
SW4	3404-000165	SWITCH-TACT;12V,50MA,160GF+-50GF,6X6MM,SPS	
SW5	3404-000165	SWITCH-TACT;12V,50MA,160GF+-50GF,6X6MM,SPS	
SW6	3404-000165	SWITCH-TACT;12V,50MA,160GF+-50GF,6X6MM,SPS	
SW7	3404-000165	SWITCH-TACT;12V,50MA,160GF+-50GF,6X6MM,SPS	
SW8	3404-000165	SWITCH-TACT;12V,50MA,160GF+-50GF,6X6MM,SPS	
SW9	3404-000165	SWITCH-TACT;12V,50MA,160GF+-50GF,6X6MM,SPS	
	AH92-00037A	**ASSY-PCB-MAIN COM;MAX930**	**S.N.A.**
PBD1	0402-001258	DIODE-BRIDGE;GBU606,600V,6A,SIP-4,BK	
AQ17	0502-000303	TR-POWER;KSD882,NPN,1W,TO-126,TP,160-32	
AQ18	0502-000303	TR-POWER;KSD882,NPN,1W,TO-126,TP,160-32	
PQ7	0502-000407	TR-POWER;KTC4369Y,NPN,15W,TO-220,BK,120	
AQ11	0503-001014	TR-DARLINGTON;2SD2495,NPN,60W,T0-3P,BK,5	
AQ9	0503-001014	TR-DARLINGTON;2SD2495,NPN,60W,T0-3P,BK,5	
PQ1	0503-001014	TR-DARLINGTON;2SD2495,NPN,60W,T0-3P,BK,5	
AQ10	0503-001016	TR-DARLINGTON;2SB1626,PNP,60W,TO-3P,BK,5	
AQ8	0503-001016	TR-DARLINGTON;2SB1626,PNP,60W,TO-3P,BK,5	
DIC1	1201-000358	IC-PREAMP;22291,DIP,24P,-,DUAL,-,PLASTIC	
	1203-000300	IC-POSI.FIXED REG.;7810,TO-220,3P,-,PLASTIC,9.6/1	
FIC4	1204-001465	IC-VOLUME/TONE CONT.;TDA7440D,SOP,28,18.	
AR1	2003-000390	R-METAL OXIDE(S);0.27OHM,5%,2W,AA,TP,4X12MM	
AR2	2003-000390	R-METAL OXIDE(S);0.27OHM,5%,2W,AA,TP,4X12MM	
AR24	2003-000390	R-METAL OXIDE(S);0.27OHM,5%,2W,AA,TP,4X12MM	
AR25	2003-000390	R-METAL OXIDE(S);0.27OHM,5%,2W,AA,TP,4X12MM	
PR32	2003-000690	R-METAL OXIDE(S);4.7ohm,5%,2W,AA,TP,4x12mm	
PR1	2003-000734	R-METAL OXIDE(S);560ohm,5%,2W,AA,TP,4x12mm	
RC1	2201-000546	C-CERAMIC,DISC;4.7NF,20%,400V,Y5U,BK,16X7,10	
RC2	2201-000546	C-CERAMIC,DISC;4.7NF,20%,400V,Y5U,BK,16X7,10	
PC1	2401-001943	C-AL;3300UF,20%,50V,GP,BK,25X40MM,1	
PC2	2401-001943	C-AL;3300UF,20%,50V,GP,BK,25X40MM,1	
RF1	3601-000207	FUSE-FERRULE;250V,1A,TL,GLASS,5x20mm	
RSW1	3711-000190	CONNECTOR-HEADER;1WALL,2P,1R,7.92MM,STRAIGHT,SN	
ACW1	3711-000820	CONNECTOR-HEADER;BOX,2P,1R,2.5mm,STRAIGHT,SN	
FCW1	3711-002809	CONNECTOR-HEADER;BOX,8P,1R,2mm,STRAIGHT,SN	
	3711-003097	CONNECTOR-HEADER;NOWALL,10P,1R,1.25MM,ANGLE,SN	
CCW1	3711-003104	CONNECTOR-HEADER;NOWALL,22P,1R,1.25MM,ANGLE,SN	
DCW1	3711-003107	CONNECTOR-HEADER;BOX,3P,1R,2.5mm,STRAIGHT,SN	
DCW4	3711-003107	CONNECTOR-HEADER;BOX,3P,1R,2.5mm,STRAIGHT,SN	
DCW2	3711-003111	CONNECTOR-HEADER;BOX,6P,1R,2.5mm,-,BRAS	
PCW2	3711-003111	CONNECTOR-HEADER;BOX,6P,1R,2.5mm,-,BRAS	
FCW2	3711-004109	CONNECTOR-HEADER;3WALL,14P,1R,2mm,STRAIGHT,SN	
AJACK1	3716-000209	TERMINAL-BLOCK;,-,-,60V,7A	
HJACK1	3722-000363	JACK-PHONE;9P,6.4MM,AU,BLK,-	
FJACK	3722-000377	JACK-RCA;4P/2C,3.5MM,SN,BLK,#16~22	
AL3	AH26-10002G	TRANS-IF;IODT-N5002,BIAS-OSC,3.7MH,7.6X12.0,L6/10	
DL4	AH26-10002G	TRANS-IF;IODT-N5002,BIAS-OSC,3.7MH,7.6X12.0,L6/10	
DL1	AH26-10002Y	COIL-TRAP;FB875-85A,BIAS-TRAP,35DB,8.0,180PF,85KHZ	
DL2	AH26-10002Y	COIL-TRAP;FB875-85A,BIAS-TRAP,35DB,8.0,180PF,85KHZ	
RL1	AH27-10001F	COIL-CHOKE;27UH,K,Q30,-,-,DR(6.5*7.5),-,-,	
RL2	AH27-10001F	COIL-CHOKE;27UH,K,Q30,-,-,DR(6.5*7.5),-,-,	
FAN	AH31-10020A	FAN-DC;D0620B-12M,12VDC/0.16A,	
PCW1	AH39-00018A	LEAD-CONNECTOR ASSY;-,5264,51088,6P,300MM,1007#22	
	AH39-50001L	LEAD-FASTEN;RING,1007#24,200MM,BLK	
AD1	0401-000101	DIODE-SWITCHING;1N4148,100V,200mA,DO-35,TP	
AD2	0401-000101	DIODE-SWITCHING;1N4148,100V,200mA,DO-35,TP	
AD3	0401-000101	DIODE-SWITCHING;1N4148,100V,200mA,DO-35,TP	
AD4	0401-000101	DIODE-SWITCHING;1N4148,100V,200mA,DO-35,TP	
AD5	0401-000101	DIODE-SWITCHING;1N4148,100V,200mA,DO-35,TP	
DD1	0401-000101	DIODE-SWITCHING;1N4148,100V,200mA,DO-35,TP	
DD2	0401-000101	DIODE-SWITCHING;1N4148,100V,200mA,DO-35,TP	
DD3	0401-000101	DIODE-SWITCHING;1N4148,100V,200mA,DO-35,TP	
DD5	0401-000101	DIODE-SWITCHING;1N4148,100V,200mA,DO-35,TP	
DD6	0401-000101	DIODE-SWITCHING;1N4148,100V,200mA,DO-35,TP	
FD2	0401-000101	DIODE-SWITCHING;1N4148,100V,200mA,DO-35,TP	
PD3	0401-000101	DIODE-SWITCHING;1N4148,100V,200mA,DO-35,TP	
PD7	0401-000101	DIODE-SWITCHING;1N4148,100V,200mA,DO-35,TP	
PD1	0402-000127	DIODE-RECTIFIER;1N4002,100V,1A,DO-41,TP	
PD2	0402-000127	DIODE-RECTIFIER;1N4002,100V,1A,DO-41,TP	
PD4	0402-000127	DIODE-RECTIFIER;1N4002,100V,1A,DO-41,TP	
PD6	0402-000151	DIODE-RECTIFIER;1N5392,100V,1.5A,DO-15,TP	

Location no.	Code no.	Description & Specification	Remarks
PZD5	0403-000354	DIODE-ZENER;UZ5.1B,5.1V,4.8-5.4V,500mW,DO-	
PZD9	0403-000354	DIODE-ZENER;UZ5.1B,5.1V,4.8-5.4V,500mW,DO-	
PZD4	0403-000377	DIODE-ZENER;UZP10B,10V,9.4-10.6V,1W,DO-41,	
PZD6	0403-000377	DIODE-ZENER;UZP10B,10V,9.4-10.6V,1W,DO-41,	
PZD7	0403-000379	DIODE-ZENER;UZP12B,12V,11.4-12.6V,1W,DO-41	
PZD8	0403-000379	DIODE-ZENER;UZP12B,12V,11.4-12.6V,1W,DO-41	
PZD3	0403-000396	DIODE-ZENER;UZP6.8B,6.8V,6.4-7.2V,1W,DO	
PZD1	0403-000564	DIODE-ZENER;TZP16A,16V,15.3-17.1V,1W,DO-41	
PZD2	0403-000564	DIODE-ZENER;TZP16A,16V,15.3-17.1V,1W,DO-41	
DQ22	0501-000010	TR-SMALL SIGNAL;KSC1008,NPN,800mW,TO-92,TP,120	
DQ7	0501-000010	TR-SMALL SIGNAL;KSC1008,NPN,800mW,TO-92,TP,120	
DQ8	0501-000010	TR-SMALL SIGNAL;KSC1008,NPN,800mW,TO-92,TP,120	
DQ9	0501-000010	TR-SMALL SIGNAL;KSC1008,NPN,800mW,TO-92,TP,120	
FQ4	0501-000010	TR-SMALL SIGNAL;KSC1008,NPN,800mW,TO-92,TP,120	
PQ3	0501-000010	TR-SMALL SIGNAL;KSC1008,NPN,800mW,TO-92,TP,120	
PQ5	0501-000010	TR-SMALL SIGNAL;KSC1008,NPN,800mW,TO-92,TP,120	
PQ6	0501-000010	TR-SMALL SIGNAL;KSC1008,NPN,800mW,TO-92,TP,120	
AQ12	0501-000294	TR-SMALL SIGNAL;KSA708-Y,PNP,800mW,TO-92,TP,12	
AQ4	0501-000294	TR-SMALL SIGNAL;KSA708-Y,PNP,800mW,TO-92,TP,12	
PQ10	0501-000294	TR-SMALL SIGNAL;KSA708-Y,PNP,800mW,TO-92,TP,12	
PQ8	0501-000294	TR-SMALL SIGNAL;KSA708-Y,PNP,800mW,TO-92,TP,12	
AQ22	0501-000296	TR-SMALL SIGNAL;KSA709-Y,PNP,800mW,TO-92,TP,12	
PQ17	0501-000331	TR-SMALL SIGNAL;KSC1009-Y,NPN,800mW,TO-92,-,12	
AQ19	0501-000354	TR-SMALL SIGNAL;KSC1845-F,NPN,500MW,TO-92,TP,3	
AQ2	0501-000354	TR-SMALL SIGNAL;KSC1845-F,NPN,500MW,TO-92,TP,3	
AQ20	0501-000354	TR-SMALL SIGNAL;KSC1845-F,NPN,500MW,TO-92,TP,3	
AQ3	0501-000354	TR-SMALL SIGNAL;KSC1845-F,NPN,500MW,TO-92,TP,3	
DQ5	0501-000369	TR-SMALL SIGNAL;KSC2331-Y,NPN,1W,TO-92L,-,120-	
AAQ1	0501-000398	TR-SMALL SIGNAL;KSC945,NPN,250mW,TO-92,TP,120-	
AAQ2	0501-000398	TR-SMALL SIGNAL;KSC945,NPN,250mW,TO-92,TP,120-	
AQ1	0501-000398	TR-SMALL SIGNAL;KSC945,NPN,250mW,TO-92,TP,120-	
AQ16	0501-000398	TR-SMALL SIGNAL;KSC945,NPN,250mW,TO-92,TP,120-	
AQ23	0501-000398	TR-SMALL SIGNAL;KSC945,NPN,250mW,TO-92,TP,120-	
DQ13	0501-000398	TR-SMALL SIGNAL;KSC945,NPN,250mW,TO-92,TP,120-	
DQ19	0501-000398	TR-SMALL SIGNAL;KSC945,NPN,250mW,TO-92,TP,120-	
DQ20	0501-000398	TR-SMALL SIGNAL;KSC945,NPN,250mW,TO-92,TP,120-	
DQ21	0501-000398	TR-SMALL SIGNAL;KSC945,NPN,250mW,TO-92,TP,120-	
DQ6	0501-000398	TR-SMALL SIGNAL;KSC945,NPN,250mW,TO-92,TP,120-	
EQ1	0501-000398	TR-SMALL SIGNAL;KSC945,NPN,250mW,TO-92,TP,120-	
AQ13	0501-000407	TR-SMALL SIGNAL;KSD471A-Y,NPN,800MW,TO-92,-,12	
AQ15	0501-000407	TR-SMALL SIGNAL;KSD471A-Y,NPN,800MW,TO-92,-,12	
AQ5	0501-000407	TR-SMALL SIGNAL;KSD471A-Y,NPN,800MW,TO-92,-,12	
DQ3	0501-000407	TR-SMALL SIGNAL;KSD471A-Y,NPN,800MW,TO-92,-,12	
Q7	0501-000407	TR-SMALL SIGNAL;KSD471A-Y,NPN,800MW,TO-92,-,12	
DQ4	0501-000610	TR-SMALL SIGNAL;KSA928A-Y,PNP,1W,TO-92L,TP,160	
PQ11	0501-000610	TR-SMALL SIGNAL;KSA928A-Y,PNP,1W,TO-92L,TP,160	
PQ15	0501-000610	TR-SMALL SIGNAL;KSA928A-Y,PNP,1W,TO-92L,TP,160	
AQ14	0501-002188	TR-SMALL SIGNAL;KSA992,PNP,500mW,TO-92,T	
AQ6	0501-002188	TR-SMALL SIGNAL;KSA992,PNP,500mW,TO-92,T	
DQ18	0504-000118	TR-DIGITAL;KSR1003,NPN,300mW,22K-22K,TO-9	
FQ7	0504-000118	TR-DIGITAL;KSR1003,NPN,300mW,22K-22K,TO-9	
FQ8	0504-000118	TR-DIGITAL;KSR1003,NPN,300mW,22K-22K,TO-9	
PQ13	0504-000118	TR-DIGITAL;KSR1003,NPN,300mW,22K-22K,TO-9	
PQ9	0504-000118	TR-DIGITAL;KSR1003,NPN,300mW,22K-22K,TO-9	
DQ17	0504-000122	TR-DIGITAL;KSR1009Y,NPN,300mW,4.7K,TO-92,	
FQ2	0504-000122	TR-DIGITAL;KSR1009Y,NPN,300mW,4.7K,TO-92,	
FQ3	0504-000122	TR-DIGITAL;KSR1009Y,NPN,300mW,4.7K,TO-92,	
PQ18	0504-000122	TR-DIGITAL;KSR1009Y,NPN,300mW,4.7K,TO-92,	
DQ1	0504-001003	TR-DIGITAL;KSR2003,PNP,300MW,22K-22K,TO-9	
DQ10	0504-001003	TR-DIGITAL;KSR2003,PNP,300MW,22K-22K,TO-9	
DQ2	0504-001003	TR-DIGITAL;KSR2003,PNP,300MW,22K-22K,TO-9	
FQ1	0504-001003	TR-DIGITAL;KSR2003,PNP,300MW,22K-22K,TO-9	
FQ5	0504-001003	TR-DIGITAL;KSR2003,PNP,300MW,22K-22K,TO-9	
FQ6	0504-001003	TR-DIGITAL;KSR2003,PNP,300MW,22K-22K,TO-9	
PQ14	0504-001003	TR-DIGITAL;KSR2003,PNP,300MW,22K-22K,TO-9	
PQ16	0504-001003	TR-DIGITAL;KSR2003,PNP,300MW,22K-22K,TO-9	
FIC3	1001-001065	IC-ANALOG SWITCH;NJU4066BM,CMOS,DMP,14P,	
-	1201-000163	IC-OP AMP;BA4560F-E2	
FIC2	1201-000163	IC-OP AMP;BA4560F-E2	
AR30	2001-000003	R-CARBON;330ohm,5%,1/8W,AA,TP,1.8x3.2mm	
AR8	2001-000003	R-CARBON;330ohm,5%,1/8W,AA,TP,1.8x3.2mm	
DR13	2001-000003	R-CARBON;330ohm,5%,1/8W,AA,TP,1.8x3.2mm	
DR52	2001-000003	R-CARBON;330ohm,5%,1/8W,AA,TP,1.8x3.2mm	
DR55	2001-000008	R-CARBON;15Kohm,5%,1/8W,AA,TP,1.8x3.2mm	
DR6	2001-000008	R-CARBON;15Kohm,5%,1/8W,AA,TP,1.8x3.2mm	
FR37	2001-000008	R-CARBON;15Kohm,5%,1/8W,AA,TP,1.8x3.2mm	
FR40	2001-000008	R-CARBON;15Kohm,5%,1/8W,AA,TP,1.8x3.2mm	
DR8	2001-000010	R-CARBON;68Kohm,5%,1/8W,AA,TP,1.8x3.2mm	
PR14	2001-000019	R-CARBON(S);10ohm,5%,1/2W,AA,TP,2.4x6.4mm	
AR28	2001-000028	R-CARBON(S);100OHM,5%,1/2W,AA,TP,-	
AR5	2001-000028	R-CARBON(S);100OHM,5%,1/2W,AA,TP,-	
PR14	2001-000028	R-CARBON(S);100OHM,5%,1/2W,AA,TP,-	
AR10	2001-000050	R-CARBON;2.7KOHM,5%,1/4W,AA,TP,-	
AR32	2001-000050	R-CARBON;2.7KOHM,5%,1/4W,AA,TP,-	
AR44	2001-000109	R-CARBON(S);470ohm,5%,1/2W,AA,TP,2.4x6.4mm	
AR45	2001-000109	R-CARBON(S);470ohm,5%,1/2W,AA,TP,2.4x6.4mm	
PR25	2001-000109	R-CARBON(S);470ohm,5%,1/2W,AA,TP,2.4x6.4mm	
PR16	2001-000117	R-CARBON(S);68ohm,5%,1/2W,AA,TP,2.4x6.4mm	
FR35	2001-000221	R-CARBON;1.2KOHM,5%,1/8W,AA,TP,-	
FR36	2001-000221	R-CARBON;1.2KOHM,5%,1/8W,AA,TP,-	
FR19	2001-000241	R-CARBON;1.5Kohm,5%,1/8W,AA,TP,1.8x3.2m	
FR20	2001-000241	R-CARBON;1.5Kohm,5%,1/8W,AA,TP,1.8x3.2m	
FR21	2001-000241	R-CARBON;1.5Kohm,5%,1/8W,AA,TP,1.8x3.2m	

Location no.	Code no.	Description & Specifiation	Remarks
FR24	2001-000241	R-CARBON;1.5Kohm,5%,1/8W,AA,TP,1.8x3.2m	
PR28	2001-000241	R-CARBON;1.5Kohm,5%,1/8W,AA,TP,1.8x3.2m	
DR78	2001-000258	R-CARBON;1.8KOHM,5%,1/8W,AA,TP,-	
DR9	2001-000258	R-CARBON;1.8KOHM,5%,1/8W,AA,TP,-	
FR35	2001-000258	R-CARBON;1.8KOHM,5%,1/8W,AA,TP,-	
FR36	2001-000258	R-CARBON;1.8KOHM,5%,1/8W,AA,TP,-	
AR15	2001-000273	R-CARBON;100KOHM,5%,1/8W,AA,TP,-	
AR40	2001-000273	R-CARBON;100KOHM,5%,1/8W,AA,TP,-	
FR53	2001-000273	R-CARBON;100KOHM,5%,1/8W,AA,TP,-	
PR37	2001-000273	R-CARBON;100KOHM,5%,1/8W,AA,TP,-	
PR50	2001-000273	R-CARBON;100KOHM,5%,1/8W,AA,TP,-	
AR16	2001-000281	R-CARBON;100ohm,5%,1/8W,AA,TP,1.8x3.2mm	
AR47	2001-000281	R-CARBON;100ohm,5%,1/8W,AA,TP,1.8x3.2mm	
CR1	2001-000281	R-CARBON;100ohm,5%,1/8W,AA,TP,1.8x3.2mm	
CR2	2001-000281	R-CARBON;100ohm,5%,1/8W,AA,TP,1.8x3.2mm	
CR3	2001-000281	R-CARBON;100ohm,5%,1/8W,AA,TP,1.8x3.2mm	
FR30	2001-000281	R-CARBON;100ohm,5%,1/8W,AA,TP,1.8x3.2mm	
FR31	2001-000281	R-CARBON;100ohm,5%,1/8W,AA,TP,1.8x3.2mm	
FR50	2001-000281	R-CARBON;100ohm,5%,1/8W,AA,TP,1.8x3.2mm	
AR52	2001-000290	R-CARBON;10KOHM,5%,1/8W,AA,TP,-	
AR53	2001-000290	R-CARBON;10KOHM,5%,1/8W,AA,TP,-	
DD7	2001-000290	R-CARBON;10KOHM,5%,1/8W,AA,TP,-	
DR15	2001-000290	R-CARBON;10KOHM,5%,1/8W,AA,TP,-	
DR48	2001-000290	R-CARBON;10KOHM,5%,1/8W,AA,TP,-	
DR49	2001-000290	R-CARBON;10KOHM,5%,1/8W,AA,TP,-	
DR50	2001-000290	R-CARBON;10KOHM,5%,1/8W,AA,TP,-	
DR68	2001-000290	R-CARBON;10KOHM,5%,1/8W,AA,TP,-	
DR72	2001-000290	R-CARBON;10KOHM,5%,1/8W,AA,TP,-	
FAR1	2001-000290	R-CARBON;10KOHM,5%,1/8W,AA,TP,-	
FAR2	2001-000290	R-CARBON;10KOHM,5%,1/8W,AA,TP,-	
FR10	2001-000290	R-CARBON;10KOHM,5%,1/8W,AA,TP,-	
FR2	2001-000290	R-CARBON;10KOHM,5%,1/8W,AA,TP,-	
FR25	2001-000290	R-CARBON;10KOHM,5%,1/8W,AA,TP,-	
FR26	2001-000290	R-CARBON;10KOHM,5%,1/8W,AA,TP,-	
FR27	2001-000290	R-CARBON;10KOHM,5%,1/8W,AA,TP,-	
FR34	2001-000290	R-CARBON;10KOHM,5%,1/8W,AA,TP,-	
FR4	2001-000290	R-CARBON;10KOHM,5%,1/8W,AA,TP,-	
FR51	2001-000290	R-CARBON;10KOHM,5%,1/8W,AA,TP,-	
FR9	2001-000290	R-CARBON;10KOHM,5%,1/8W,AA,TP,-	
JI8	2001-000290	R-CARBON;10KOHM,5%,1/8W,AA,TP,-	
PR11	2001-000290	R-CARBON;10KOHM,5%,1/8W,AA,TP,-	
PR12	2001-000290	R-CARBON;10KOHM,5%,1/8W,AA,TP,-	
PR15	2001-000290	R-CARBON;10KOHM,5%,1/8W,AA,TP,-	
PR18	2001-000290	R-CARBON;10KOHM,5%,1/8W,AA,TP,-	
PR36	2001-000290	R-CARBON;10KOHM,5%,1/8W,AA,TP,-	
PR7	2001-000290	R-CARBON;10KOHM,5%,1/8W,AA,TP,-	
AR21	2001-000331	R-CARBON;12KOHM,5%,1/8W,AA,TP,-	
DR12	2001-000331	R-CARBON;12KOHM,5%,1/8W,AA,TP,-	
DR34	2001-000331	R-CARBON;12KOHM,5%,1/8W,AA,TP,-	
FR10	2001-000331	R-CARBON;12KOHM,5%,1/8W,AA,TP,-	
DR19	2001-000397	R-CARBON;180Kohm,5%,1/8W,AA,TP,1.8x3.2m	
DR73	2001-000397	R-CARBON;180Kohm,5%,1/8W,AA,TP,1.8x3.2m	
AR43	2001-000411	R-CARBON;18KOHM,5%,1/8W,AA,TP,-	
AR6	2001-000411	R-CARBON;18KOHM,5%,1/8W,AA,TP,-	
FR38	2001-000411	R-CARBON;18KOHM,5%,1/8W,AA,TP,-	
FR39	2001-000411	R-CARBON;18KOHM,5%,1/8W,AA,TP,-	
-	2001-000429	R-CARBON;1KOHM,5%,1/8W,AA,TP,-	
AR14	2001-000429	R-CARBON;1KOHM,5%,1/8W,AA,TP,-	
AR18	2001-000429	R-CARBON;1KOHM,5%,1/8W,AA,TP,-	
AR20	2001-000429	R-CARBON;1KOHM,5%,1/8W,AA,TP,-	
AR22	2001-000429	R-CARBON;1KOHM,5%,1/8W,AA,TP,-	
AR27	2001-000429	R-CARBON;1KOHM,5%,1/8W,AA,TP,-	
AR34	2001-000429	R-CARBON;1KOHM,5%,1/8W,AA,TP,-	
AR39	2001-000429	R-CARBON;1KOHM,5%,1/8W,AA,TP,-	
AR4	2001-000429	R-CARBON;1KOHM,5%,1/8W,AA,TP,-	
AR41	2001-000429	R-CARBON;1KOHM,5%,1/8W,AA,TP,-	
AR42	2001-000429	R-CARBON;1KOHM,5%,1/8W,AA,TP,-	
DR57	2001-000429	R-CARBON;1KOHM,5%,1/8W,AA,TP,-	
DR76	2001-000429	R-CARBON;1KOHM,5%,1/8W,AA,TP,-	
PR4	2001-000429	R-CARBON;1KOHM,5%,1/8W,AA,TP,-	
AJ56	2001-000449	R-CARBON;2.2Kohm,5%,1/8W,AA,TP,1.8x3.2m	
AR19	2001-000449	R-CARBON;2.2Kohm,5%,1/8W,AA,TP,1.8x3.2m	
AR48	2001-000449	R-CARBON;2.2Kohm,5%,1/8W,AA,TP,1.8x3.2m	
AR50	2001-000449	R-CARBON;2.2Kohm,5%,1/8W,AA,TP,1.8x3.2m	
DR25	2001-000449	R-CARBON;2.2Kohm,5%,1/8W,AA,TP,1.8x3.2m	
DR27	2001-000449	R-CARBON;2.2Kohm,5%,1/8W,AA,TP,1.8x3.2m	
DR28	2001-000449	R-CARBON;2.2Kohm,5%,1/8W,AA,TP,1.8x3.2m	
DR29	2001-000449	R-CARBON;2.2Kohm,5%,1/8W,AA,TP,1.8x3.2m	
DR30	2001-000449	R-CARBON;2.2Kohm,5%,1/8W,AA,TP,1.8x3.2m	
DR31	2001-000449	R-CARBON;2.2Kohm,5%,1/8W,AA,TP,1.8x3.2m	
DR42	2001-000449	R-CARBON;2.2Kohm,5%,1/8W,AA,TP,1.8x3.2m	
DR43	2001-000449	R-CARBON;2.2Kohm,5%,1/8W,AA,TP,1.8x3.2m	
DR75	2001-000449	R-CARBON;2.2Kohm,5%,1/8W,AA,TP,1.8x3.2m	
DR77	2001-000449	R-CARBON;2.2Kohm,5%,1/8W,AA,TP,1.8x3.2m	
ER7	2001-000449	R-CARBON;2.2Kohm,5%,1/8W,AA,TP,1.8x3.2m	
FR1	2001-000449	R-CARBON;2.2Kohm,5%,1/8W,AA,TP,1.8x3.2m	
FR11	2001-000449	R-CARBON;2.2Kohm,5%,1/8W,AA,TP,1.8x3.2m	
PR26	2001-000449	R-CARBON;2.2Kohm,5%,1/8W,AA,TP,1.8x3.2m	
PR29	2001-000449	R-CARBON;2.2Kohm,5%,1/8W,AA,TP,1.8x3.2m	
FR14	2001-000515	R-CARBON;220ohm,5%,1/8W,AA,TP,1.8x3.2mm	
FR16	2001-000515	R-CARBON;220ohm,5%,1/8W,AA,TP,1.8x3.2mm	
FR52	2001-000515	R-CARBON;220ohm,5%,1/8W,AA,TP,1.8x3.2mm	
FR6	2001-000515	R-CARBON;220ohm,5%,1/8W,AA,TP,1.8x3.2mm	
FR8	2001-000515	R-CARBON;220ohm,5%,1/8W,AA,TP,1.8x3.2mm	
-	2001-000522	R-CARBON;22Kohm,5%,1/8W,AA,TP,1.8x3.2mm	
AAR1	2001-000522	R-CARBON;22Kohm,5%,1/8W,AA,TP,1.8x3.2mm	
AAR2	2001-000522	R-CARBON;22Kohm,5%,1/8W,AA,TP,1.8x3.2mm	
AAR3	2001-000522	R-CARBON;22Kohm,5%,1/8W,AA,TP,1.8x3.2mm	
AAR4	2001-000522	R-CARBON;22Kohm,5%,1/8W,AA,TP,1.8x3.2mm	
AAR5	2001-000522	R-CARBON;22Kohm,5%,1/8W,AA,TP,1.8x3.2mm	
AAR6	2001-000522	R-CARBON;22Kohm,5%,1/8W,AA,TP,1.8x3.2mm	
AR54	2001-000522	R-CARBON;22Kohm,5%,1/8W,AA,TP,1.8x3.2mm	
DR24	2001-000522	R-CARBON;22Kohm,5%,1/8W,AA,TP,1.8x3.2mm	
FR12	2001-000522	R-CARBON;22Kohm,5%,1/8W,AA,TP,1.8x3.2mm	
FR32	2001-000522	R-CARBON;22Kohm,5%,1/8W,AA,TP,1.8x3.2mm	
FR33	2001-000522	R-CARBON;22Kohm,5%,1/8W,AA,TP,1.8x3.2mm	
PR17	2001-000522	R-CARBON;22Kohm,5%,1/8W,AA,TP,1.8x3.2mm	
PR21	2001-000522	R-CARBON;22Kohm,5%,1/8W,AA,TP,1.8x3.2mm	
PR35	2001-000522	R-CARBON;22Kohm,5%,1/8W,AA,TP,1.8x3.2mm	
PR5	2001-000522	R-CARBON;22Kohm,5%,1/8W,AA,TP,1.8x3.2mm	
PR9	2001-000522	R-CARBON;22Kohm,5%,1/8W,AA,TP,1.8x3.2mm	
DR17	2001-000527	R-CARBON;22ohm,5%,1/8W,AA,TP,1.8x3.2mm	
DR46	2001-000527	R-CARBON;22ohm,5%,1/8W,AA,TP,1.8x3.2mm	
FR22	2001-000548	R-CARBON;270Kohm,5%,1/8W,AA,TP,1.8x3.2m	
FR23	2001-000548	R-CARBON;270Kohm,5%,1/8W,AA,TP,1.8x3.2m	
AR23	2001-000591	R-CARBON;3.3KOHM,5%,1/8W,AA,TP,-	
AR37	2001-000591	R-CARBON;3.3KOHM,5%,1/8W,AA,TP,-	
AR55	2001-000591	R-CARBON;3.3KOHM,5%,1/8W,AA,TP,-	
DR11	2001-000591	R-CARBON;3.3KOHM,5%,1/8W,AA,TP,-	
DR20	2001-000591	R-CARBON;3.3KOHM,5%,1/8W,AA,TP,-	
DR5	2001-000591	R-CARBON;3.3KOHM,5%,1/8W,AA,TP,-	
DR58	2001-000591	R-CARBON;3.3KOHM,5%,1/8W,AA,TP,-	
DR70	2001-000591	R-CARBON;3.3KOHM,5%,1/8W,AA,TP,-	
DR71	2001-000591	R-CARBON;3.3KOHM,5%,1/8W,AA,TP,-	
FR55	2001-000591	R-CARBON;3.3KOHM,5%,1/8W,AA,TP,-	
FR80	2001-000591	R-CARBON;3.3KOHM,5%,1/8W,AA,TP,-	
PR100	2001-000591	R-CARBON;3.3KOHM,5%,1/8W,AA,TP,-	
PR13	2001-000591	R-CARBON;3.3KOHM,5%,1/8W,AA,TP,-	
DR1	2001-000613	R-CARBON;3.9KOHM,5%,1/8W,AA,TP,-	
DR61	2001-000613	R-CARBON;3.9KOHM,5%,1/8W,AA,TP,-	
DR69	2001-000663	R-CARBON;33ohm,5%,1/2W,AA,TP,3.3x9mm	
-	2001-000702	R-CARBON;39Kohm,5%,1/8W,AA,TP,1.8x3.2mm	
PR27	2001-000702	R-CARBON;39Kohm,5%,1/8W,AA,TP,1.8x3.2mm	
DR54	2001-000708	R-CARBON;39OHM,5%,1/8W,AA,TP,-	
DR14	2001-000734	R-CARBON;4.7KOHM,5%,1/8W,AA,TP,-	
DR23	2001-000734	R-CARBON;4.7KOHM,5%,1/8W,AA,TP,-	
DR41	2001-000734	R-CARBON;4.7KOHM,5%,1/8W,AA,TP,-	
DR67	2001-000734	R-CARBON;4.7KOHM,5%,1/8W,AA,TP,-	
FR13	2001-000734	R-CARBON;4.7KOHM,5%,1/8W,AA,TP,-	
FR18	2001-000734	R-CARBON;4.7KOHM,5%,1/8W,AA,TP,-	
FR3	2001-000734	R-CARBON;4.7KOHM,5%,1/8W,AA,TP,-	
FR54	2001-000734	R-CARBON;4.7KOHM,5%,1/8W,AA,TP,-	
PR20	2001-000734	R-CARBON;4.7KOHM,5%,1/8W,AA,TP,-	
DR66	2001-000773	R-CARBON;470Kohm,5%,1/8W,AA,TP,1.8x3.2m	
AR31	2001-000786	R-CARBON;47Kohm,5%,1/8W,AA,TP,1.8x3.2mm	
AR52	2001-000786	R-CARBON;47Kohm,5%,1/8W,AA,TP,1.8x3.2mm	
AR53	2001-000786	R-CARBON;47Kohm,5%,1/8W,AA,TP,1.8x3.2mm	
AR9	2001-000786	R-CARBON;47Kohm,5%,1/8W,AA,TP,1.8x3.2mm	
DR10	2001-000786	R-CARBON;47Kohm,5%,1/8W,AA,TP,1.8x3.2mm	
DR26	2001-000786	R-CARBON;47Kohm,5%,1/8W,AA,TP,1.8x3.2mm	
DR44	2001-000786	R-CARBON;47Kohm,5%,1/8W,AA,TP,1.8x3.2mm	
DR47	2001-000786	R-CARBON;47Kohm,5%,1/8W,AA,TP,1.8x3.2mm	
DR56	2001-000786	R-CARBON;47Kohm,5%,1/8W,AA,TP,1.8x3.2mm	
DR63	2001-000786	R-CARBON;47Kohm,5%,1/8W,AA,TP,1.8x3.2mm	
DR7	2001-000786	R-CARBON;47Kohm,5%,1/8W,AA,TP,1.8x3.2mm	
FR15	2001-000786	R-CARBON;47Kohm,5%,1/8W,AA,TP,1.8x3.2mm	
FR17	2001-000786	R-CARBON;47Kohm,5%,1/8W,AA,TP,1.8x3.2mm	
FR28	2001-000786	R-CARBON;47Kohm,5%,1/8W,AA,TP,1.8x3.2mm	
FR29	2001-000786	R-CARBON;47Kohm,5%,1/8W,AA,TP,1.8x3.2mm	
FR42	2001-000786	R-CARBON;47Kohm,5%,1/8W,AA,TP,1.8x3.2mm	
FR44	2001-000786	R-CARBON;47Kohm,5%,1/8W,AA,TP,1.8x3.2mm	
FR48	2001-000786	R-CARBON;47Kohm,5%,1/8W,AA,TP,1.8x3.2mm	
FR49	2001-000786	R-CARBON;47Kohm,5%,1/8W,AA,TP,1.8x3.2mm	
FR5	2001-000786	R-CARBON;47Kohm,5%,1/8W,AA,TP,1.8x3.2mm	
FR7	2001-000786	R-CARBON;47Kohm,5%,1/8W,AA,TP,1.8x3.2mm	
PR30	2001-000786	R-CARBON;47Kohm,5%,1/8W,AA,TP,1.8x3.2mm	
PR33	2001-000786	R-CARBON;47Kohm,5%,1/8W,AA,TP,1.8x3.2mm	
DR65	2001-000793	R-CARBON;47ohm,5%,1/8W,AA,TP,1.8x3.2mm	
FR45	2001-000793	R-CARBON;47ohm,5%,1/8W,AA,TP,1.8x3.2mm	
PR24	2001-000793	R-CARBON;47ohm,5%,1/8W,AA,TP,1.8x3.2mm	
DR53	2001-000802	R-CARBON;5.6Kohm,5%,1/8W,AA,TP,1.8x3.2m	
FR45	2001-000802	R-CARBON;5.6Kohm,5%,1/8W,AA,TP,1.8x3.2m	
FR47	2001-000802	R-CARBON;5.6Kohm,5%,1/8W,AA,TP,1.8x3.2m	
AR12	2001-000864	R-CARBON;56KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
AR17	2001-000864	R-CARBON;56KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
AR35	2001-000864	R-CARBON;56KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
AR46	2001-000864	R-CARBON;56KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
DR64	2001-000864	R-CARBON;56KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
FR41	2001-000864	R-CARBON;56KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
FR43	2001-000864	R-CARBON;56KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
DR51	2001-000890	R-CARBON;6.8KOHM,5%,1/8W,AA,TP,-	
PR6	2001-000890	R-CARBON;6.8KOHM,5%,1/8W,AA,TP,-	
AR13	2001-000924	R-CARBON;680ohm,5%,1/8W,AA,TP,1.8x3.2mm	
AR36	2001-000924	R-CARBON;680ohm,5%,1/8W,AA,TP,1.8x3.2mm	
DR16	2001-000924	R-CARBON;680ohm,5%,1/8W,AA,TP,1.8x3.2mm	
DR45	2001-000924	R-CARBON;680ohm,5%,1/8W,AA,TP,1.8x3.2mm	

Location no.	Code no.	Description & Specifiation	Remarks
OR1	2001-000938	R-CARBON;68ohm,5%,1/8W,AA,TP,1.8x3.2mm	
DR18	2001-000977	R-CARBON;8.2Kohm,5%,1/8W,AA,TP,1.8x3.2m	
DR74	2001-000977	R-CARBON;8.2Kohm,5%,1/8W,AA,TP,1.8x3.2m	
AR29	2001-000995	R-CARBON;820OHM,5%,1/8W,AA,TP,-	
AR7	2001-000995	R-CARBON;820OHM,5%,1/8W,AA,TP,-	
DR2	2001-001006	R-CARBON;82ohm,5%,1/8W,AA,TP,1.8x3.2mm	
DR60	2001-001006	R-CARBON;82ohm,5%,1/8W,AA,TP,1.8x3.2mm	
PR29	2001-001093	R-CARBON(S);2.2Kohm,5%,1/2W,AA,TP,2.4x6.4m	
DR33	2001-001096	R-CARBON(S);2.2ohm,5%,1/2W,AA,TP,2.4x6.4mm	
AR11	2001-001107	R-CARBON(S);220ohm,5%,1/2W,AA,TP,2.4x6.4mm	
AR33	2001-001107	R-CARBON(S);220ohm,5%,1/2W,AA,TP,2.4x6.4mm	
PR2	2001-001153	R-CARBON(S);47ohm,5%,1/2W,AA,TP,2.4x6.4mm	
PR3	2001-001153	R-CARBON(S);47ohm,5%,1/2W,AA,TP,2.4x6.4mm	
PR3	2003-000429	R-METAL OXIDE(S);1.5Kohm,5%,2W,AA,TP,4x12mm	
AR26	2003-000468	R-METAL OXIDE(S);10ohm,5%,1W,AA,TP,3.3x9mm	
AR3	2003-000468	R-METAL OXIDE(S);10ohm,5%,1W,AA,TP,3.3x9mm	
PFR1	2003-000542	R-METAL OXIDE(S);1ohm,5%,1W,AA,TP,3.3x9mm	
PR34	2003-000587	R-METAL OXIDE(S);22ohm,5%,1W,AA,TP,3.3x9mm	
DVR4	2103-000171	VR-SEMI;10KOHM,30%,1/10W,TOP	
DVR1	2103-000248	VR-SEMI;200KOHM,30%,1/10W,TOP	
DVR2	2103-000248	VR-SEMI;200KOHM,30%,1/10W,TOP	
AC22	2201-000338	C-CERAMIC,DISC;2.2NF,20%,50V,Y5T,TP,5.0X3.0,5	
AC4	2201-000338	C-CERAMIC,DISC;2.2NF,20%,50V,Y5T,TP,5.0X3.0,5	
FC29	2201-000377	C-CERAMIC,DISC;220PF,5%,50V,UJ,TP,8.0X3.0,5	
FC30	2201-000377	C-CERAMIC,DISC;220PF,5%,50V,UJ,TP,8.0X3.0,5	
	2201-000483	C-CERAMIC,DISC;33pF,5%,50V,CH,TP,5x3,5	
RC1	2201-000547	C-CERAMIC,DISC;4.7nF,20%,500V,Y5T,TP,8x3,5	
RC2	2201-000547	C-CERAMIC,DISC;4.7nF,20%,500V,Y5T,TP,8x3,5	
FC24	2201-000557	C-CERAMIC,DISC;470pF,10%,50V,SL,TP,8x3,5	
AC12	2201-000653	C-CERAMIC,DISC;68pF,5%,50V,SL,TP,4.0X3.5mm,2.	
AC23	2201-000653	C-CERAMIC,DISC;68pF,5%,50V,SL,TP,4.0X3.5mm,2.	
PC11	2201-000783	C-CERAMIC,DISC;100NF,+80%,-20%,50V,Y5V,TP,8X3	
PC12	2201-000783	C-CERAMIC,DISC;100NF,+80%,-20%,50V,Y5V,TP,8X3	
PC13	2201-000783	C-CERAMIC,DISC;100NF,+80%,-20%,50V,Y5V,TP,8X3	
AAC26	2202-000781	C-CERAMIC,MLC-AXIAL:100pF,10%,50V,Y5P,TP;100PF,10%,50V,Y5P,TP,3.5X19,-	
AAC27	2202-000781	C-CERAMIC,MLC-AXIAL:100pF,10%,50V,Y5P,TP;100PF,10%,50V,Y5P,TP,3.5X19,-	
DC11	2202-000781	C-CERAMIC,MLC-AXIAL:100pF,10%,50V,Y5P,TP;100PF,10%,50V,Y5P,TP,3.5X19,-	
DC15	2202-000781	C-CERAMIC,MLC-AXIAL:100pF,10%,50V,Y5P,TP;100PF,10%,50V,Y5P,TP,3.5X19,-	
DC42	2202-000781	C-CERAMIC,MLC-AXIAL:100pF,10%,50V,Y5P,TP;100PF,10%,50V,Y5P,TP,3.5X19,-	
DC55	2202-000781	C-CERAMIC,MLC-AXIAL:100pF,10%,50V,Y5P,TP;100PF,10%,50V,Y5P,TP,3.5X19,-	
DC56	2202-000781	C-CERAMIC,MLC-AXIAL:100pF,10%,50V,Y5P,TP;100PF,10%,50V,Y5P,TP,3.5X19,-	
DC9	2202-000781	C-CERAMIC,MLC-AXIAL:100pF,10%,50V,Y5P,TP;100PF,10%,50V,Y5P,TP,3.5X19,-	
FC46	2202-000781	C-CERAMIC,MLC-AXIAL:100pF,10%,50V,Y5P,TP;100PF,10%,50V,Y5P,TP,3.5X19,-	
FC47	2202-000781	C-CERAMIC,MLC-AXIAL:100pF,10%,50V,Y5P,TP;100PF,10%,50V,Y5P,TP,3.5X19,-	
DC28	2202-000796	C-CERAMIC,MLC-AXIAL:1nF,10%,50V,Y5P,TP,3.5x19,-	
DC3	2202-000796	C-CERAMIC,MLC-AXIAL:1nF,10%,50V,Y5P,TP,3.5x19,-	
DC52	2202-000806	C-CERAMIC,MLC-AXIAL:220pF,10%,50V,Y5P,TP,3.5x19,-	
DC53	2202-000806	C-CERAMIC,MLC-AXIAL:220pF,10%,50V,Y5P,TP,3.5x19,-	
FC1	2202-000806	C-CERAMIC,MLC-AXIAL:220pF,10%,50V,Y5P,TP,3.5x19,-	
FC6	2202-000806	C-CERAMIC,MLC-AXIAL:220pF,10%,50V,Y5P,TP,3.5x19,-	
AAC28	2202-000807	C-CERAMIC,MLC-AXIAL:22NF,+80-20%,25V,Y5V,TP,3.5X19	
AAC29	2202-000807	C-CERAMIC,MLC-AXIAL:22NF,+80-20%,25V,Y5V,TP,3.5X19	
AAC28	2202-000820	C-CERAMIC,MLC-AXIAL:5.6NF,20%,16V,Y5R,TP,3.5X19,-	
AAC29	2202-000820	C-CERAMIC,MLC-AXIAL:5.6NF,20%,16V,Y5R,TP,3.5X19,-	
DC20	2202-000847	C-CERAMIC,MLC-AXIAL:1,8NF,30%,50V,Y5S,TP,3.5X1.9	
DC21	2202-000847	C-CERAMIC,MLC-AXIAL:1,8NF,30%,50V,Y5S,TP,3.5X1.9	
DC30	2202-000847	C-CERAMIC,MLC-AXIAL:1,8NF,30%,50V,Y5S,TP,3.5X1.9	
DC31	2202-000847	C-CERAMIC,MLC-AXIAL:1,8NF,30%,50V,Y5S,TP,3.5X1.9	
-	2202-000854	C-CERAMIC,MLC-AXIAL:47NF,30%,50V,Y5R,TP,3.5X1.9,-	
DC57	2202-000854	C-CERAMIC,MLC-AXIAL:47NF,30%,50V,Y5R,TP,3.5X1.9,-	
DC22	2301-000383	C-FILM,PEF;10nF,5%,50V,TP,6x7x3.2mm,5mm	
FC33	2301-000383	C-FILM,PEF;10nF,5%,50V,TP,6x7x3.2mm,5mm	
OC3	2301-000383	C-FILM,PEF;10nF,5%,50V,TP,6x7x3.2mm,5mm	
DC18	2301-000390	C-FILM,PEF;15NF,10%,50V,TP,6.5X9X3.5MM,5M	
DC23	2301-000390	C-FILM,PEF;15NF,10%,50V,TP,6.5X9X3.5MM,5M	
DC35	2301-000390	C-FILM,PEF;15NF,10%,50V,TP,6.5X9X3.5MM,5M	
DC34	2301-000396	C-FILM,PEF;18NF,5%,50V,TP,7X12X4,4MM	
DC8	2301-000396	C-FILM,PEF;18NF,5%,50V,TP,7X12X4,4MM	
DC4	2301-000401	C-FILM,PEF;1NF,5%,50V,TP,5.5X12X3.3MM	
DC44	2301-000401	C-FILM,PEF;1NF,5%,50V,TP,5.5X12X3.3MM	
DC59	2301-000404	C-FILM,PEF;2.2NF,10%,50V,TP,5.5X7X3.2MM,5	
FC10	2301-000412	C-FILM,PEF;22NF,10%,50V,TP,6.5X10.5X4MM,5	
FC12	2301-000412	C-FILM,PEF;22NF,10%,50V,TP,6.5X10.5X4MM,5	
FC13	2301-000412	C-FILM,PEF;22NF,10%,50V,TP,6.5X10.5X4MM,5	
FC38	2301-000419	C-FILM,PEF;27NF,10%,50V,TP,7.5X10.5X4MM,5	
FC39	2301-000419	C-FILM,PEF;27NF,10%,50V,TP,7.5X10.5X4MM,5	
DC17	2301-000428	C-FILM,PEF;3.9nF,5%,50V,TP,5.5x12x3,3mm	
DC50	2301-000428	C-FILM,PEF;3.9nF,5%,50V,TP,5.5x12x3,3mm	
DC25	2301-000446	C-FILM,PEF;4.7NF,5%,50V,TP,6X12X3,3.5MM	
PC23	2301-000449	C-FILM,PEF;47NF,10%,50V,TP,8X11X4.5MM,5MM	
DC37	2301-000475	C-FILM,PEF;8.2nF,5%,50V,TP,6.5x12x3.5,3.5	
DC5	2301-000475	C-FILM,PEF;8.2nF,5%,50V,TP,6.5x12x3.5,3.5	
AC11	2303-000311	C-FILM,PPF;100NF,5%,100V,TP,10X13.5X4,5MM	
AC8	2303-000311	C-FILM,PPF;100NF,5%,100V,TP,10X13.5X4,5MM	
DC12	2303-000311	C-FILM,PPF;100NF,5%,100V,TP,10X13.5X4,5MM	
DC38	2303-000311	C-FILM,PPF;100NF,5%,100V,TP,10X13.5X4,5MM	
FC22	2303-000311	C-FILM,PPF;100NF,5%,100V,TP,10X13.5X4,5MM	
FC23	2303-000311	C-FILM,PPF;100NF,5%,100V,TP,10X13.5X4,5MM	
FC34	2303-000311	C-FILM,PPF;100NF,5%,100V,TP,10X13.5X4,5MM	
FC35	2303-000311	C-FILM,PPF;100NF,5%,100V,TP,10X13.5X4,5MM	
FC36	2303-000311	C-FILM,PPF;100NF,5%,100V,TP,10X13.5X4,5MM	
FC37	2303-000311	C-FILM,PPF;100NF,5%,100V,TP,10X13.5X4,5MM	
PC11	2303-000311	C-FILM,PPF;100NF,5%,100V,TP,10X13.5X4,5MM	

Location no.	Code no.	Description & Specifiation	Remarks
PC12	2303-000311	C-FILM,PPF;100NF,5%,100V,TP,10X13.5X4,5MM	
PC13	2303-000311	C-FILM,PPF;100NF,5%,100V,TP,10X13.5X4,5MM	
PC3	2401-000230	C-AL;100uF,20%,100V,GP,TP,12.5x20,5	
DC2	2401-000240	C-AL;100uF,20%,10V,GP,TP,5x11,5	
DC36	2401-000240	C-AL;100uF,20%,10V,GP,TP,5x11,5	
AC28	2401-000303	C-AL;100uF,20%,25V,GP,TP,6.3x11,5	
AC14	2401-000357	C-AL;100UF,20%,50V,GP,-,8X11.5,3.5M	
AC18	2401-000357	C-AL;100UF,20%,50V,GP,-,8X11.5,3.5M	
AC6	2401-000357	C-AL;100UF,20%,50V,GP,-,8X11.5,3.5M	
PC4	2401-000357	C-AL;100UF,20%,50V,GP,-,8X11.5,3.5M	
FC40	2401-000438	C-AL;10UF,20%,25V,GP,-,5X11,2MM	
PC6	2401-000475	C-AL;10UF,20%,50V,GP,-,5X11,2MM	
DC51	2401-000795	C-AL;220UF,20%,16V,GP,-,8X11.5,3.5M	
PC15	2401-000795	C-AL;220UF,20%,16V,GP,-,8X11.5,3.5M	
PC18	2401-000830	C-AL;220uF,20%,25V,GP,TP,8x11.5,5	
DC13	2401-001019	C-AL;3.3UF,20%,50V,GP,-,5X7,1.5MM	
DC16	2401-001019	C-AL;3.3UF,20%,50V,GP,-,5X7,1.5MM	
DC32	2401-001019	C-AL;3.3UF,20%,50V,GP,-,5X7,1.5MM	
DC41	2401-001019	C-AL;3.3UF,20%,50V,GP,-,5X7,1.5MM	
DC47	2401-001019	C-AL;3.3UF,20%,50V,GP,-,5X7,1.5MM	
DC7	2401-001019	C-AL;3.3UF,20%,50V,GP,-,5X7,1.5MM	
DC1	2401-001080	C-AL;330nF,20%,50V,GP,-,5x11,2mm	
DC45	2401-001080	C-AL;330nF,20%,50V,GP,-,5x11,2mm	
AC25	2401-001538	C-AL;47UF,20%,25V,GP,-,6X11,2.5MM	
AC28	2401-001538	C-AL;47UF,20%,25V,GP,-,6X11,2.5MM	
DC33	2401-001538	C-AL;47UF,20%,25V,GP,-,6X11,2.5MM	
DC6	2401-001538	C-AL;47UF,20%,25V,GP,-,6X11,2.5MM	
PC16	2401-001538	C-AL;47UF,20%,25V,GP,-,6X11,2.5MM	
PC17	2401-001538	C-AL;47UF,20%,25V,GP,-,6X11,2.5MM	
PC22	2401-001538	C-AL;47UF,20%,25V,GP,-,6X11,2.5MM	
PC24	2401-001538	C-AL;47UF,20%,25V,GP,-,6X11,2.5MM	
PC7	2401-001538	C-AL;47UF,20%,25V,GP,-,6X11,2.5MM	
PC9	2401-001538	C-AL;47UF,20%,25V,GP,-,6X11,2.5MM	
AAC1	2401-001572	C-AL;47UF,20%,50V,GP,-,6.3X11,2.5MM	
AAC3	2401-001572	C-AL;47UF,20%,50V,GP,-,6.3X11,2.5MM	
AC17	2401-001572	C-AL;47UF,20%,50V,GP,-,6.3X11,2.5MM	
AC5	2401-001572	C-AL;47UF,20%,50V,GP,-,6.3X11,2.5MM	
PC10	2401-001572	C-AL;47UF,20%,50V,GP,-,6.3X11,2.5MM	
PC21	2401-001572	C-AL;47UF,20%,50V,GP,-,6.3X11,2.5MM	
AC19	2401-001887	C-AL;100NF,20%,50V,-,TP,4X7MM,5	
AC2	2401-001887	C-AL;100NF,20%,50V,-,TP,4X7MM,5	
DC24	2401-001895	C-AL;100uF,20%,16V,GP,6.3x11mm,2.5m	
AC13	2401-001912	C-AL;1uF,20%,50V,GP,5x11mm,2mm,BK	
AC7	2401-001912	C-AL;1uF,20%,50V,GP,5x11mm,2mm,BK	
DC54	2401-001912	C-AL;1uF,20%,50V,GP,5x11mm,2mm,BK	
DC58	2401-001912	C-AL;1uF,20%,50V,GP,5x11mm,2mm,BK	
FC11	2401-001912	C-AL;1uF,20%,50V,GP,5x11mm,2mm,BK	
FC43	2401-001912	C-AL;1uF,20%,50V,GP,5x11mm,2mm,BK	
FC9	2401-001912	C-AL;1uF,20%,50V,GP,5x11mm,2mm,BK	
PAC1	2401-001912	C-AL;1uF,20%,50V,GP,5x11mm,2mm,BK	
PC5	2401-001912	C-AL;1uF,20%,50V,GP,5x11mm,2mm,BK	
AC15	2401-001938	C-AL;22UF,20%,25V,GP,BK,5X11MM,2MM	
AC3	2401-001938	C-AL;22UF,20%,25V,GP,BK,5X11MM,2MM	
AC1	2401-001952	C-AL;4.7UF,20%,50V,-,TP,6.3X7,5	
AC16	2401-001952	C-AL;4.7UF,20%,50V,-,TP,6.3X7,5	
DC40	2401-001952	C-AL;4.7UF,20%,50V,-,TP,6.3X7,5	
FC2	2401-001952	C-AL;4.7UF,20%,50V,-,TP,6.3X7,5	
FC3	2401-001952	C-AL;4.7UF,20%,50V,-,TP,6.3X7,5	
FC4	2401-001952	C-AL;4.7UF,20%,50V,-,TP,6.3X7,5	
FC41	2401-001952	C-AL;4.7UF,20%,50V,-,TP,6.3X7,5	
FC42	2401-001952	C-AL;4.7UF,20%,50V,-,TP,6.3X7,5	
FC45	2401-001952	C-AL;4.7UF,20%,50V,-,TP,6.3X7,5	
FC5	2401-001952	C-AL;4.7UF,20%,50V,-,TP,6.3X7,5	
PC14	2401-001952	C-AL;4.7UF,20%,50V,-,TP,6.3X7,5	
DC14	2401-001975	C-AL;47UF,20%,16V,GP,TP,5X11MM,5	
DC43	2401-001975	C-AL;47UF,20%,16V,GP,TP,5X11MM,5	
FC15	2401-001975	C-AL;47UF,20%,16V,GP,TP,5X11MM,5	
FC16	2401-001975	C-AL;47UF,20%,16V,GP,TP,5X11MM,5	
FC44	2401-001975	C-AL;47UF,20%,16V,GP,TP,5X11MM,5	
PC8	2401-001975	C-AL;47UF,20%,16V,GP,TP,5X11MM,5	
FC20	2401-001989	C-AL;4.7uF,20%,50V,BP,TP,5x11,5	
FC21	2401-001989	C-AL;4.7uF,20%,50V,BP,TP,5x11,5	
-	2401-002180	C-AL;2.2UF,20%,50V,GP,TP,5X11,5MM	
DC10	2401-002180	C-AL;2.2UF,20%,50V,GP,TP,5X11,5MM	
DC39	2401-002180	C-AL;2.2UF,20%,50V,GP,TP,5X11,5MM	
DC48	2401-002180	C-AL;2.2UF,20%,50V,GP,TP,5X11,5MM	
DC49	2401-002180	C-AL;2.2UF,20%,50V,GP,TP,5X11,5MM	
FC25	2401-002180	C-AL;2.2UF,20%,50V,GP,TP,5X11,5MM	
FC26	2401-002180	C-AL;2.2UF,20%,50V,GP,TP,5X11,5MM	
FC27	2401-002180	C-AL;2.2UF,20%,50V,GP,TP,5X11,5MM	
FC28	2401-002180	C-AL;2.2UF,20%,50V,GP,TP,5X11,5MM	
FC31	2401-002180	C-AL;2.2UF,20%,50V,GP,TP,5X11,5MM	
FC32	2401-002180	C-AL;2.2UF,20%,50V,GP,TP,5X11,5MM	
PL1	2701-000116	INDUCTOR-AXIAL;10uH,10%,4.2x9.8mm	
AL3	2701-000298	INDUCTOR-AXIAL;470uH,10%,4.2x9.8mm	
DL3	2701-000298	INDUCTOR-AXIAL;470uH,10%,4.2x9.8mm	
PL4	2701-000298	INDUCTOR-AXIAL;470uH,10%,4.2x9.8mm	
RF1	3602-000147	FUSE-CLIP;250V,7.5A,30MOHM	
RF2	3602-000147	FUSE-CLIP;250V,7.5A,30MOHM	
	AH94-00010B	**ASS'Y-MAIN CE OPT;MAX940/930**	**S.N.A.**
AAC2	2201-000205	C-CERAMIC,DISC;10PF,5%,50V,RH,TP,5X3,5	
AAC4	2201-000205	C-CERAMIC,DISC;10PF,5%,50V,RH,TP,5X3,5	

Location no.	Code no.	Description & Specification	Remarks
FAC1	2202-000231	C-CERAMIC,MLC-AXIAL;330pF,10%,50V,Y5P,TP,3.5x19,-	
FAC2	2202-000231	C-CERAMIC,MLC-AXIAL;330pF,10%,50V,Y5P,TP,3.5x19,-	
-	2202-000781	C-CERAMIC,MLC-AXIAL:100pF,10%,50V,Y5P,TP;100PF,10%,50V,Y5P,TP,3.5X19,-	
DIPPING	2202-000781	C-CERAMIC,MLC-AXIAL:100pF,10%,50V,Y5P,TP;100PF,10%,50V,Y5P,TP,3.5X19,-	
AC10	2301-000446	C-FILM,PEF;4.7NF,5%,50V,TP,6X12X3,3.5MM	
AC9	2301-000446	C-FILM,PEF;4.7NF,5%,50V,TP,6X12X3,3.5MM	
FAC3	2301-000449	C-FILM,PEF;47NF,10%,50V,TP,8X11X4.5MM,5MM	
AAL1	AH27-90001B	COIL-SPRING;,2.2UH,-,-,SPRING	
AAL2	AH27-90001B	COIL-SPRING;,2.2UH,-,-,SPRING	
AL1	AH27-90001B	COIL-SPRING;,2.2UH,-,-,SPRING	
AL2	AH27-90001B	COIL-SPRING;,2.2UH,-,-,SPRING	
GND	AH39-50001L	LEAD-FASTEN;RING,1007#24,200MM,BLK	
	AH94-00010C	**ASS'Y-RDS NO MIC;NAX940/930**	**S.N.A.**
OC1	2201-000381	C-CERAMIC,DISC;22NF,20%,50V,Y5V,8.0x4.0mm,5mm,TP	
OC3	2201-000483	C-CERAMIC,DISC;33pF,5%,50V,CH,TP,5x3,5	
OC2	2401-000240	C-AL;100uF,20%,10V,GP,TP,5x11,5	
OF1	2901-001139	FILTER-EMI ON BOARD;50V,.5A,-;390PF,7X2.5X5MM,TP,RADIAL	
BEAD1	3301-000297	CORE-FERRITE BEAD;AA,3.6X1.2X5.7MM,1400,2900G	
OJACK1	3707-001005	CONNECTER-OPTICAL;PLUG,SM,-,4.4/2.0MM	
OCW1	3711-000907	CONNECTOR-HEADER;BOX,3P,1R,2mm,STRAIGHT,SN	
OIC1	AH14-10004R	IC;M74HCU04,SOP,TAPE 14P	
RDS	AH39-00023A	LEAD CONNECTOR-ASSY;-,51004-03,51004-03,03P,300MM,2547#28	
	AH94-00016B	**ASS'Y-FRT RDS NO MIC;MAX940/930**	**S.N.A.**
2001-000290		R-CARBON;10KOHM,5%,1/8W,AA,TP,-	
2001-000429		R-CARBON;1KOHM,5%,1/8W,AA,TP,-	
2001-000734		R-CARBON;4.7KOHM,5%,1/8W,AA,TP,-	
	G3V1	**RADIO CD PLATER;**	
	AH91-00001B	CMS300,OPTION G3VI;G3VI OPTION	
	AH92-00005A	**ASSY-PCB-CD MAIN;G3VI,CD PACK**	**S.N.A.**
NQ1502	0501-000314	TR-SMALL SIGNAL;KSA812,PNP,150MW,SOT-23,TP,90-	
NIC928	0904-001159	IC-DSP;9286,8BIT,QFP,80P,-,1MHZ,TR,CM	
NIC925	1003-000179	IC-MOTOR DRIVER;KA9258D,SOP,28P,-,SINGLE,-,ST,	
NIC922	1204-001286	IC-ASP;KB9223,QFP,80P,-,PLASTIC,6V,20	
NR109	2007-000282	R-CHIP;100KOHM,5%,1/10W,DA,TP,2012	
NR203	2007-000282	R-CHIP;100KOHM,5%,1/10W,DA,TP,2012	
NR300	2007-000282	R-CHIP;100KOHM,5%,1/10W,DA,TP,2012	
NR57L	2007-000282	R-CHIP;100KOHM,5%,1/10W,DA,TP,2012	
NR57R	2007-000282	R-CHIP;100KOHM,5%,1/10W,DA,TP,2012	
NR606	2007-000282	R-CHIP;100KOHM,5%,1/10W,DA,TP,2012	
NR602	2007-000300	R-CHIP;10KOHM,5%,1/10W,DA,TP,2012	
NR603	2007-000300	R-CHIP;10KOHM,5%,1/10W,DA,TP,2012	
NR104	2007-000338	R-CHIP;120KOHM,5%,1/10W,DA,TP,2012	
NR107	2007-000338	R-CHIP;120KOHM,5%,1/10W,DA,TP,2012	
NR100	2007-000355	R-CHIP;12KOHM,5%,1/10W,DA,TP,2012	
NR120	2007-000355	R-CHIP;12KOHM,5%,1/10W,DA,TP,2012	
NR121	2007-000355	R-CHIP;12KOHM,5%,1/10W,DA,TP,2012	
NR204	2007-000355	R-CHIP;12KOHM,5%,1/10W,DA,TP,2012	
FREE	2007-000395	R-CHIP;150KOHM,5%,1/10W,DA,TP,2012	
NR103	2007-000395	R-CHIP;150KOHM,5%,1/10W,DA,TP,2012	
NR119	2007-000395	R-CHIP;150KOHM,5%,1/10W,DA,TP,2012	
NR400	2007-000409	R-CHIP;15KOHM,5%,1/10W,DA,TP,2012	
NR115	2007-000444	R-CHIP;180KOHM,5%,1/10W,DA,TP,2012	
NR10	2007-000468	R-CHIP;1KOHM,5%,1/10W,DA,TP,2012	
NR11	2007-000468	R-CHIP;1KOHM,5%,1/10W,DA,TP,2012	
NR12	2007-000468	R-CHIP;1KOHM,5%,1/10W,DA,TP,2012	
NR4	2007-000468	R-CHIP;1KOHM,5%,1/10W,DA,TP,2012	
NR5	2007-000468	R-CHIP;1KOHM,5%,1/10W,DA,TP,2012	
NR54L	2007-000468	R-CHIP;1KOHM,5%,1/10W,DA,TP,2012	
NR54R	2007-000468	R-CHIP;1KOHM,5%,1/10W,DA,TP,2012	
NR6	2007-000468	R-CHIP;1KOHM,5%,1/10W,DA,TP,2012	
NR604	2007-000468	R-CHIP;1KOHM,5%,1/10W,DA,TP,2012	
NR7	2007-000468	R-CHIP;1KOHM,5%,1/10W,DA,TP,2012	
NR8	2007-000468	R-CHIP;1KOHM,5%,1/10W,DA,TP,2012	
NR804	2007-000468	R-CHIP;1KOHM,5%,1/10W,DA,TP,2012	
SR3	2007-000468	R-CHIP;1KOHM,5%,1/10W,DA,TP,2012	
SR4	2007-000468	R-CHIP;1KOHM,5%,1/10W,DA,TP,2012	
NR114	2007-000477	R-CHIP;1MOHM,5%,1/10W,DA,TP,2012	
NR50L	2007-000586	R-CHIP;22KOHM,5%,1/10W,DA,TP,2012	
NR50R	2007-000586	R-CHIP;22KOHM,5%,1/10W,DA,TP,2012	
NR101	2007-000593	R-CHIP;22OHM,5%,1/10W,DA,TP,2012	
NR200	2007-000653	R-CHIP;27KOHM,5%,1/10W,DA,TP,2012	
NR52L	2007-000653	R-CHIP;27KOHM,5%,1/10W,DA,TP,2012	
NR52R	2007-000653	R-CHIP;27KOHM,5%,1/10W,DA,TP,2012	
NR201	2007-000686	R-CHIP;3.3KOHM,5%,1/10W,DA,TP,2012	
NR202	2007-000686	R-CHIP;3.3KOHM,5%,1/10W,DA,TP,2012	
NR105	2007-000830	R-CHIP;39KOHM,5%,1/10W,DA,TP,2012	
NR995	2007-000830	R-CHIP;39KOHM,5%,1/10W,DA,TP,2012	
NR996	2007-000830	R-CHIP;39KOHM,5%,1/10W,DA,TP,2012	
NR997	2007-000830	R-CHIP;39KOHM,5%,1/10W,DA,TP,2012	
NR998	2007-000830	R-CHIP;39KOHM,5%,1/10W,DA,TP,2012	
NR53L	2007-000872	R-CHIP;4.7KOHM,5%,1/10W,DA,TP,2012	
NR53R	2007-000872	R-CHIP;4.7KOHM,5%,1/10W,DA,TP,2012	
NR55L	2007-000872	R-CHIP;4.7KOHM,5%,1/10W,DA,TP,2012	
NR55R	2007-000872	R-CHIP;4.7KOHM,5%,1/10W,DA,TP,2012	
SR2	2007-000872	R-CHIP;4.7KOHM,5%,1/10W,DA,TP,2012	
NR117	2007-000898	R-CHIP;430Kohm,5%,1/10W,DA,TP,2012	
NR108	2007-000941	R-CHIP;47KOHM,5%,1/10W,DA,TP,2012	
NR111	2007-000941	R-CHIP;47KOHM,5%,1/10W,DA,TP,2012	

Location no.	Code no.	Description & Specification	Remarks
NR112	2007-001039	R-CHIP;56KOHM,5%,1/10W,DA,TP,2012	
NR116	2007-001195	R-CHIP;820KOHM,5%,1/10W,DA,TP,2012	
NR994	2007-001208	R-CHIP;82KOHM,5%,1/10W,DA,TP,2012	
NR999	2007-001208	R-CHIP;82KOHM,5%,1/10W,DA,TP,2012	
	2007-001216	R-CHIP;82OHM,5%,1/10W,DA,TP,2012	
NC107	2203-000199	C-CERAMIC,CHIP;100nF,79.8,50V,Z5U,TP,2012,-	
NC108	2203-000199	C-CERAMIC,CHIP;100nF,79.8,50V,Z5U,TP,2012,-	
NC119	2203-000199	C-CERAMIC,CHIP;100nF,79.8,50V,Z5U,TP,2012,-	
NC120	2203-000199	C-CERAMIC,CHIP;100nF,79.8,50V,Z5U,TP,2012,-	
NC121	2203-000199	C-CERAMIC,CHIP;100nF,79.8,50V,Z5U,TP,2012,-	
NC600	2203-000199	C-CERAMIC,CHIP;100nF,79.8,50V,Z5U,TP,2012,-	
NC901	2203-000199	C-CERAMIC,CHIP;100nF,79.8,50V,Z5U,TP,2012,-	
NC1	2203-000260	C-CERAMIC,CHIP;10nF,10%,50V,X7R,TP,2012,-	
NC103	2203-000260	C-CERAMIC,CHIP;10nF,10%,50V,X7R,TP,2012,-	
NC112	2203-000260	C-CERAMIC,CHIP;10nF,10%,50V,X7R,TP,2012,-	
NC113	2203-000260	C-CERAMIC,CHIP;10nF,10%,50V,X7R,TP,2012,-	
NC116	2203-000260	C-CERAMIC,CHIP;10nF,10%,50V,X7R,TP,2012,-	
NC205	2203-000260	C-CERAMIC,CHIP;10nF,10%,50V,X7R,TP,2012,-	
NC502	2203-000260	C-CERAMIC,CHIP;10nF,10%,50V,X7R,TP,2012,-	
NC503	2203-000260	C-CERAMIC,CHIP;10nF,10%,50V,X7R,TP,2012,-	
NC504	2203-000260	C-CERAMIC,CHIP;10nF,10%,50V,X7R,TP,2012,-	
NC53L	2203-000260	C-CERAMIC,CHIP;10nF,10%,50V,X7R,TP,2012,-	
NC53R	2203-000260	C-CERAMIC,CHIP;10nF,10%,50V,X7R,TP,2012,-	
NC602	2203-000260	C-CERAMIC,CHIP;10nF,10%,50V,X7R,TP,2012,-	
NC800	2203-000260	C-CERAMIC,CHIP;10nF,10%,50V,X7R,TP,2012,-	
NC804	2203-000260	C-CERAMIC,CHIP;10nF,10%,50V,X7R,TP,2012,-	
NC905	2203-000260	C-CERAMIC,CHIP;10nF,10%,50V,X7R,TP,2012,-	
SC1	2203-000260	C-CERAMIC,CHIP;10nF,10%,50V,X7R,TP,2012,-	
SC2	2203-000260	C-CERAMIC,CHIP;10nF,10%,50V,X7R,TP,2012,-	
SC6	2203-000260	C-CERAMIC,CHIP;10nF,10%,50V,X7R,TP,2012,-	
NC190	2203-000335	C-CERAMIC,CHIP;12pF,5%,50V,NPO,TP,2012,2.0m	
NC117	2203-000477	C-CERAMIC,CHIP;1uF,+80-20%,16V,Y5V,TP,2012,-	
NC110	2203-000495	C-CERAMIC,CHIP;2.2nF,10%,50V,X7R,2012,-,TP	
NC118	2203-000787	C-CERAMIC,CHIP;330pF,5%,50V,NPO,TP,2012,-	
NC101	2203-000802	C-CERAMIC,CHIP;33nF,10%,50V,X7R,TP,2012,-	
NC111	2203-000802	C-CERAMIC,CHIP;33nF,10%,50V,X7R,TP,2012,-	
NC125	2203-000802	C-CERAMIC,CHIP;33nF,10%,50V,X7R,TP,2012,-	
NC100	2203-000892	C-CERAMIC,CHIP;4.7NF,10%,50V,X7R,TP,2012,-	
NC106	2203-000892	C-CERAMIC,CHIP;4.7NF,10%,50V,X7R,TP,2012,-	
NC124	2203-000919	C-CERAMIC,CHIP;470nF,+80-20%,16V,Y5V,TP,2012,	
NC204	2203-000919	C-CERAMIC,CHIP;470nF,+80-20%,16V,Y5V,TP,2012,	
NC200	2203-000979	C-CERAMIC,CHIP;47nF,10%,50V,X7R,TP,2012,-	
NC115	2203-001137	C-CERAMIC,CHIP;68nF,+80-20%,50V,Y5V,TP,2012,-	
NC104	2203-001537	C-CERAMIC,CHIP;1NF,10%,50V,X7R,TP,2012,-	
NC52L	2203-001537	C-CERAMIC,CHIP;1NF,10%,50V,X7R,TP,2012,-	
NC52R	2203-001537	C-CERAMIC,CHIP;1NF,10%,50V,X7R,TP,2012,-	
NC603	2203-001537	C-CERAMIC,CHIP;1NF,10%,50V,X7R,TP,2012,-	
NC903	2203-001537	C-CERAMIC,CHIP;1NF,10%,50V,X7R,TP,2012,-	
NC102	2203-001551	C-CERAMIC,CHIP;1.5NF,10%,50V,X7R,TP,2012,2MM	
NC201	2203-001551	C-CERAMIC,CHIP;1.5NF,10%,50V,X7R,TP,2012,2MM	
NC202	2203-001619	C-CERAMIC,CHIP;27PF,5%,50V,NPO,TP,2012,2MM	
NC203	2203-001619	C-CERAMIC,CHIP;27PF,5%,50V,NPO,TP,2012,2MM	
NL105	3301-000325	CORE-FERRITE BEAD;AB,3.2x2.5x1.3mm,-,-	
SIC1	1003-001162	IC-MOTOR DRIVER;KA3082,SIP,10PIN,25MIL,DOUBLE,	
SIC2	1003-001162	IC-MOTOR DRIVER;KA3082,SIP,10PIN,25MIL,DOUBLE,	
NXF100	2802-000211	RESONATOR-CERAMIC;16.93MHZ,0.5%,TP,10.0X5.0X10.0	
SCW5	3708-001131	CONNECTOR-FPC/FC/PIC;5P,1.25mm,STRAIGHT,SN	
NCW100	3708-001312	CONNECTOR-FPC/FC/PIC;16P,1mm,STRAIGHT,SN	
	3711-000906	CONNECTOR-HEADER;BOX,3P,1R,2mm,ANGLE,SN	
SCW1	3711-002579	CONNECTOR-HEADER;WALL,22P,1R,2.5MM,ANGLE,	
SCW7	3711-003379	CONNECTOR-HEADER;NOWALL,3P,1R,2.5MM,STRAIGHT,SN	
NCW101	AH39-20025S	LEAD-CONNECTOR,ASSY;-,51004-08,35023-08,8P,300MM,1	
NCW102	AH39-20561P	LEAD CONNECTOR-ASSY;-,5295,PHR,6P,150mm,1007#28	
ND200	0401-000101	DIODE-SWITCHING;1N4148,100V,200mA,DO-35,TP	
ND201	0401-000101	DIODE-SWITCHING;1N4148,100V,200mA,DO-35,TP	
ND202	0401-000101	DIODE-SWITCHING;1N4148,100V,200mA,DO-35,TP	
ND203	0401-000101	DIODE-SWITCHING;1N4148,100V,200mA,DO-35,TP	
SZD1	0403-000352	DIODE-ZENER;UZ4.7BM,4.7V,4.4-5.0V,500MW,DO	
SZD2	0403-000361	DIODE-ZENER;UZ6.2BSB,6.2V,5.99-6.24V,50	
NQ1501	0501-000610	TR-SMALL SIGNAL;KSA928A-Y,PNP,1W,TO-92L,TP,160	
SR1	2001-000027	R-CARBON;100ohm,5%,1/4W,AA,TP,2.4x6.4mm	
NR106	2001-000319	R-CARBON;120Kohm,5%,1/8W,AA,TP,1.8x3.2m	
NR1	2001-000429	R-CARBON;1KOHM,5%,1/8W,AA,TP,-	
NR2	2001-000429	R-CARBON;1KOHM,5%,1/8W,AA,TP,-	
NR3	2001-000429	R-CARBON;1KOHM,5%,1/8W,AA,TP,-	
NR113	2001-000977	R-CARBON;8.2Kohm,5%,1/8W,AA,TP,1.8x3.2m	
NR555	2008-000141	R-FUSIBLE;2.2ohm,5%,1/4W,AA,TP,2.6x6.7mm	
NC400	2202-000243	C-CERAMIC,MLC-AXIAL;33PF,5%,50V,SL,3.5X19,-,TP	
NC300	2202-000796	C-CERAMIC,MLC-AXIAL;1nF,10%,50V,Y5P,TP,3.5x19,-	
NC117	2301-000389	C-FILM,PEF;150nF,5%,50V,TP,12.5x15x7.5,7m	
NC105	2401-000240	C-AL;100uF,20%,10V,GP,TP,5x11,5	
NC501	2401-000240	C-AL;100uF,20%,10V,GP,TP,5x11,5	
NC702	2401-000240	C-AL;100uF,20%,10V,GP,TP,5x11,5	
NC904	2401-000240	C-AL;100uF,20%,10V,GP,TP,5x11,5	
SC14	2401-000240	C-AL;100uF,20%,10V,GP,TP,5x11,5	
NC114	2401-000419	C-AL;10UF,20%,16V,GP,-,4X7,5	
NC301	2401-000778	C-AL;220uF,20%,10V,GP,6.3x11,2.5mm,	
NC700	2401-000778	C-AL;220uF,20%,10V,GP,6.3x11,2.5mm,	
NC701	2401-000778	C-AL;220uF,20%,10V,GP,6.3x11,2.5mm,	
SC5	2401-000795	C-AL;220UF,20%,16V,GP,-,8X11.5,3.5M	
NC703	2401-001102	C-AL;330UF,20%,16V,GP,TP,8X12,5	
NC122	2401-001952	C-AL;4.7UF,20%,50V,-,TP,6.3X7,5	
NC50L	2401-001952	C-AL;4.7UF,20%,50V,-,TP,6.3X7,5	

Location no.	Code no.	Description & Specification	Remarks
NC50R	2401-001952	C-AL;4.7UF,20%,50V,-,TP,6.3X7,5	
NC54	2401-001952	C-AL;4.7UF,20%,50V,-,TP,6.3X7,5	
NC55L	2401-001952	C-AL;4.7UF,20%,50V,-,TP,6.3X7,5	
NC55R	2401-001952	C-AL;4.7UF,20%,50V,-,TP,6.3X7,5	
NL101	2701-000111	INDUCTOR-AXIAL;100uH,10%,2.5x3.4mm	
NL102	2701-000111	INDUCTOR-AXIAL;100uH,10%,2.5x3.4mm	
NL100	2701-000114	INDUCTOR-AXIAL;10uH,10%,2.5x3.4mm	
SL1	2701-000179	INDUCTOR-AXIAL;33uH,10%,4.2x9.8mm	
NL300	3301-000297	CORE-FERRITE BEAD;AA,3.6X1.2X5.7MM,1400,2900G	
NL301	3301-000297	CORE-FERRITE BEAD;AA,3.6X1.2X5.7MM,1400,2900G	
NL302	3301-000297	CORE-FERRITE BEAD;AA,3.6X1.2X5.7MM,1400,2900G	
	AJ59-20150T	DECK-CDP;CMS-300,-,-,-,-	
	SPK	PS930E/AMF	SPEAKER-SYSTEM;MAX930

**** MAX938/939/940/941 Parts List ****

	AH26-80144L	TRANS-POWER;EI74X52,115/230V,60/50HZ,MAX940	
	AH39-10002L	POWER CORD;CP2,KLCE-2F,2.15M,5239,VDE	
	AH59-20006B	DECK-CASSETTE;ADR2113MW,MAX950,DC12V,DOUBLE	

AH90-10752Y ASSY-PCB-TUNER;MAX900,CE+RDS BAND S.N.A.

TFL4	14529-304-610	FILTER CERAMIC;AHCM2-450BL	
TX1	2801-000734	CRYSTAL-UNIT;7.2MHZ,50PPM,28-AAM,12PF,30OHM	
TFL2	2903-000105	FILTER-CERAMIC;BP,10.7MHZ+-25KHZ,180KHZ+-50KH	
TWA1	3710-001421	CONNECTOR-SOCKET;14P,1R,2mm,ANGLE,SN	
TJ2	3711-000814	CONNECTOR-HEADER;BOX,2P,1R,2.5mm,ANGLE,SN	
HIC1	AH14-10007G	IC;LC72131,DIP,STICK PLL	
TIC1	AH14-10008B	IC;LA1837,DIP,RF+MPX	
TLPF1	AH26-00005A	TRANS-IF;-,LKS75M00-X000264-0,LOW PASS FILTER,-,7	
TLPF2	AH26-00005A	TRANS-IF;-,LKS75M00-X000264-0,LOW PASS FILTER,-,7	
TL2	AH26-10001E	TRANS-IF;KS940228-09,-,-,7.6X12.0,-,450KHZ,BULK,	
TL3	AH26-10020A	TRANS-DET;-,7KLL,DET,-,7.8MM,91PF,11.32M	
TC39	AH61-40022A	STUD-TAP;SPC1,T0.5,BT2,-,-	
RZD1	0403-000393	DIODE-ZENER;UZP5.1B,5.1V,4.8-5.4V,1W,DO-41	
RR1	2001-000118	R-CARBON(S);180ohm,5%,1/2W,AA,TP,2.4x6.4mm	
RR3	2001-000429	R-CARBON;1KOHM,5%,1/8W,AA,TP,-	
RR4	2001-000429	R-CARBON;1KOHM,5%,1/8W,AA,TP,-	
RR5	2001-000429	R-CARBON;1KOHM,5%,1/8W,AA,TP,-	
RR2	2007-000290	R-CHIP;100OHM,5%,1/10W,DA,TP,2012	
RC9	2202-000796	C-CERAMIC,MLC-AXIAL;1nF,10%,50V,Y5P,TP,3.5x19,-	
RC2	2203-000260	C-CERAMIC,CHIP;10nF,10%,50V,X7R,TP,2012,-	
RC7	2203-000979	C-CERAMIC,CHIP;47nF,10%,50V,X7R,TP,2012,-	
RC8	2203-001058	C-CERAMIC,CHIP;560pF,5%,50V,NPO,2012,-,TP	
RC4	2203-001524	C-CERAMIC,CHIP;47pF,5%,50V,NPO,TP,2012,-	
RC5	2203-001524	C-CERAMIC,CHIP;47pF,5%,50V,NPO,TP,2012,-	
RC1	2401-000907	C-AL;22UF,20%,16V,GP,-,5X11,2MM	
RC6	2401-002180	C-AL;2.2UF,20%,50V,GP,TP,5X11,5MM	
RX1	2801-003601	CRYSTAL-UNIT;4.332MHz,30ppm,28-AAM,30pF,	
RIC1	AH14-10008E	IC;BU1923F,SOP,+5V	
TR19	2007-000282	R-CHIP;100KOHM,5%,1/10W,DA,TP,2012	
TR45	2007-000282	R-CHIP;100KOHM,5%,1/10W,DA,TP,2012	
TR47	2007-000282	R-CHIP;100KOHM,5%,1/10W,DA,TP,2012	
TR49	2007-000282	R-CHIP;100KOHM,5%,1/10W,DA,TP,2012	
TR24	2007-000290	R-CHIP;100OHM,5%,1/10W,DA,TP,2012	
TR43	2007-000290	R-CHIP;100OHM,5%,1/10W,DA,TP,2012	
TR2	2007-000300	R-CHIP;10KOHM,5%,1/10W,DA,TP,2012	
TR21	2007-000300	R-CHIP;10KOHM,5%,1/10W,DA,TP,2012	
TR22	2007-000300	R-CHIP;10KOHM,5%,1/10W,DA,TP,2012	
TR46	2007-000300	R-CHIP;10KOHM,5%,1/10W,DA,TP,2012	
TR48	2007-000300	R-CHIP;10KOHM,5%,1/10W,DA,TP,2012	
TR50	2007-000300	R-CHIP;10KOHM,5%,1/10W,DA,TP,2012	
TR53	2007-000300	R-CHIP;10KOHM,5%,1/10W,DA,TP,2012	
TR54	2007-000300	R-CHIP;10KOHM,5%,1/10W,DA,TP,2012	
TR56	2007-000300	R-CHIP;10KOHM,5%,1/10W,DA,TP,2012	
TR10	2007-000308	R-CHIP;10OHM,5%,1/10W,DA,TP,2012	
TR20	2007-000409	R-CHIP;15KOHM,5%,1/10W,DA,TP,2012	
TR28	2007-000457	R-CHIP;18KOHM,5%,1/10W,DA,TP,2012	
TR52	2007-000468	R-CHIP;1KOHM,5%,1/10W,DA,TP,2012	
TR9	2007-000468	R-CHIP;1KOHM,5%,1/10W,DA,TP,2012	
TR35	2007-000493	R-CHIP;2.2KOHM,5%,1/10W,DA,TP,2012	
TR36	2007-000493	R-CHIP;2.2KOHM,5%,1/10W,DA,TP,2012	
TR40	2007-000493	R-CHIP;2.2KOHM,5%,1/10W,DA,TP,2012	
TR7	2007-000518	R-CHIP;2.7KOHM,5%,1/10W,DA,TP,2012	
TR11	2007-000572	R-CHIP;220OHM,5%,1/10W,DA,TP,2012	
TR15	2007-000586	R-CHIP;22KOHM,5%,1/10W,DA,TP,2012	
TR12	2007-000686	R-CHIP;3.3KOHM,5%,1/10W,DA,TP,2012	
TR29	2007-000686	R-CHIP;3.3KOHM,5%,1/10W,DA,TP,2012	
TR23	2007-000710	R-CHIP;3.9KOHM,5%,1/10W,DA,TP,2012	
TR8	2007-000822	R-CHIP;390OHM,5%,1/10W,DA,TP,2012	
TR4	2007-000872	R-CHIP;4.7KOHM,5%,1/10W,DA,TP,2012	
TR51	2007-000872	R-CHIP;4.7KOHM,5%,1/10W,DA,TP,2012	
TR17	2007-000981	R-CHIP;5.6KOHM,5%,1/10W,DA,TP,2012	
TR37	2007-000981	R-CHIP;5.6KOHM,5%,1/10W,DA,TP,2012	
TR6	2007-001033	R-CHIP;560OHM,5%,1/8W,DA,TP,3216	
TR25	2007-001043	R-CHIP;56OHM,5%,1/10W,DA,TP,2012	
TR27	2007-001071	R-CHIP;6.8KOHM,5%,1/10W,DA,TP,2012	
TR38	2007-001177	R-CHIP;8.2KOHM,5%,1/10W,DA,TP,2012	
TR44	2007-001177	R-CHIP;8.2KOHM,5%,1/10W,DA,TP,2012	
TC48	2202-000807	C-CERAMIC,MLC-AXIAL;22NF,+80-20%,25V,Y5V,TP,3.5X19	
TC41	2203-000239	C-CERAMIC,CHIP;100pF,5%,50V,NPO,TP,2012,-	
TC20	2203-000260	C-CERAMIC,CHIP;10nF,10%,50V,X7R,TP,2012,-	
TC28	2203-000260	C-CERAMIC,CHIP;10nF,10%,50V,X7R,TP,2012,-	
TC29	2203-000260	C-CERAMIC,CHIP;10nF,10%,50V,X7R,TP,2012,-	
TC3	2203-000260	C-CERAMIC,CHIP;10nF,10%,50V,X7R,TP,2012,-	
TC44	2203-000260	C-CERAMIC,CHIP;10nF,10%,50V,X7R,TP,2012,-	
TC7	2203-000429	C-CERAMIC,CHIP;18pF,5%,50V,NPO,TP,2012,-	
TC1	2203-000609	C-CERAMIC,CHIP;22nF,10%,50V,X7R,TP,2012,-	
TC5	2203-000609	C-CERAMIC,CHIP;22nF,10%,50V,X7R,TP,2012,-	
TC33	2203-000844	C-CERAMIC,CHIP;39nF,10%,50V,X7R,TP,2012,-	
TC10	2203-000979	C-CERAMIC,CHIP;47nF,10%,50V,X7R,TP,2012,-	
TC13	2203-000979	C-CERAMIC,CHIP;47nF,10%,50V,X7R,TP,2012,-	
TC15	2203-000979	C-CERAMIC,CHIP;47nF,10%,50V,X7R,TP,2012,-	
TC35	2203-000979	C-CERAMIC,CHIP;47nF,10%,50V,X7R,TP,2012,-	
TC45	2203-000979	C-CERAMIC,CHIP;47nF,10%,50V,X7R,TP,2012,-	
TC6	2203-000979	C-CERAMIC,CHIP;47nF,10%,50V,X7R,TP,2012,-	
TC61	2203-001105	C-CERAMIC,CHIP;6.8nF,10%,50V,X7R,TP,2012,-	
TC62	2203-001105	C-CERAMIC,CHIP;6.8nF,10%,50V,X7R,TP,2012,-	
TC32	2203-001132	C-CERAMIC,CHIP;680pF,5%,50V,NPO,2012,-,TP	
TC2	2203-001517	C-CERAMIC,CHIP;15pF,5%,50V,NPO,TP,2012,-	
TC63	2203-001551	C-CERAMIC,CHIP;1.5NF,10%,50V,X7R,TP,2012,2MM	
TC64	2203-001551	C-CERAMIC,CHIP;1.5NF,10%,50V,X7R,TP,2012,2MM	
TC50	2203-001611	C-CERAMIC,CHIP;22pF,5%,50V,NPO,TP,2012,2mm	
TC51	2203-001611	C-CERAMIC,CHIP;22pF,5%,50V,NPO,TP,2012,2mm	
TD1	0401-000101	DIODE-SWITCHING;1N4148,100V,200mA,DO-35,TP	
TD2	0401-000101	DIODE-SWITCHING;1N4148,100V,200mA,DO-35,TP	
TD3	0401-000101	DIODE-SWITCHING;1N4148,100V,200mA,DO-35,TP	
TD4	0401-000101	DIODE-SWITCHING;1N4148,100V,200mA,DO-35,TP	
TD5	0401-000101	DIODE-SWITCHING;1N4148,100V,200mA,DO-35,TP	
TD6	0401-000101	DIODE-SWITCHING;1N4148,100V,200mA,DO-35,TP	
TZD1	0403-000367	DIODE-ZENER;UZ7.5BSC,7.5V,7.33-7.64V,500mW	
TZD2	0403-000393	DIODE-ZENER;UZP5.1B,5.1V,4.8-5.4V,1W,DO-41	
TQ4	0501-000294	TR-SMALL SIGNAL;KSA708-Y,PNP,800mW,TO-92,TP,12	
TQ2	0501-000392	TR-SMALL SIGNAL;KSC838-O,NPN,250mW,TO-92,-,70-	
TQ3	0501-000392	TR-SMALL SIGNAL;KSC838-O,NPN,250mW,TO-92,-,70-	
TQ1	0501-000398	TR-SMALL SIGNAL;KSC945,NPN,250mW,TO-92,TP,120-	
TQ5	0501-000398	TR-SMALL SIGNAL;KSC945,NPN,250mW,TO-92,TP,120-	
TQ6	0501-000398	TR-SMALL SIGNAL;KSC945,NPN,250mW,TO-92,TP,120-	
TQ7	0501-000398	TR-SMALL SIGNAL;KSC945,NPN,250mW,TO-92,TP,120-	
TR30	2001-000117	R-CARBON(S);68ohm,5%,1/2W,AA,TP,2.4x6.4mm	
TR44	2001-000118	R-CARBON(S);180ohm,5%,1/2W,AA,TP,2.4x6.4mm	
TR58	2001-000273	R-CARBON;100KOHM,5%,1/8W,AA,TP,-	
TR5	2001-000281	R-CARBON;100ohm,5%,1/8W,AA,TP,1.8x3.2mm	
TR39	2001-000290	R-CARBON;10KOHM,5%,1/8W,AA,TP,-	
TR57	2001-000290	R-CARBON;10KOHM,5%,1/8W,AA,TP,-	
TR55	2001-000429	R-CARBON;1KOHM,5%,1/8W,AA,TP,-	
TR18	2001-000449	R-CARBON;2.2Kohm,5%,1/8W,AA,TP,1.8x3.2m	
TR3	2001-000449	R-CARBON;2.2Kohm,5%,1/8W,AA,TP,1.8x3.2m	
TR13	2001-000515	R-CARBON;220ohm,5%,1/8W,AA,TP,1.8x3.2mm	
TR16	2001-000527	R-CARBON;22ohm,5%,1/8W,AA,TP,1.8x3.2mm	
TR32	2001-000591	R-CARBON;3.3KOHM,5%,1/8W,AA,TP,-	
TR34	2001-000591	R-CARBON;3.3KOHM,5%,1/8W,AA,TP,-	
TR61	2001-000591	R-CARBON;3.3KOHM,5%,1/8W,AA,TP,-	
TR62	2001-000591	R-CARBON;3.3KOHM,5%,1/8W,AA,TP,-	
TR42	2001-000734	R-CARBON;4.7KOHM,5%,1/8W,AA,TP,-	
TSR1	2103-000290	VR-SEMI;20Kohm,30%,1/10W,TOP	
TC14	2201-000565	C-CERAMIC,DISC;47nF,20%,50V,Y5V,12.5x4.0mm,5mm,TP	
TC39	2201-000565	C-CERAMIC,DISC;47nF,20%,50V,Y5V,12.5x4.0mm,5mm,TP	
TC40	2202-000796	C-CERAMIC,MLC-AXIAL;1nF,10%,50V,Y5P,TP,3.5x19,-	
TC42	2202-000796	C-CERAMIC,MLC-AXIAL;1nF,10%,50V,Y5P,TP,3.5x19,-	
TC21	2401-000244	C-AL;100uF,20%,10V,GP,TP,6.3x7,5	
TC46	2401-000244	C-AL;100uF,20%,10V,GP,TP,6.3x7,5	
TC12	2401-000419	C-AL;10UF,20%,16V,GP,-,4X7,5	
TC26	2401-000419	C-AL;10UF,20%,16V,GP,-,4X7,5	
TC27	2401-000419	C-AL;10UF,20%,16V,GP,-,4X7,5	
TC30	2401-000419	C-AL;10UF,20%,16V,GP,-,4X7,5	
TC34	2401-000907	C-AL;22UF,20%,16V,GP,-,5X11,2MM	
TC36	2401-001022	C-AL;3.3UF,20%,50V,GP,-,5X11,2MM	
TC38	2401-001164	C-AL;33UF,20%,16V,GP,-,5X11,2MM	
TC11	2401-001912	C-AL;1uF,20%,50V,GP,5x11mm,2mm,BK	
TC17	2401-001912	C-AL;1uF,20%,50V,GP,5x11mm,2mm,BK	
TC19	2401-001912	C-AL;1uF,20%,50V,GP,5x11mm,2mm,BK	
TC16	2401-001954	C-AL;4.7UF,20%,50V,GP,BK,5X11MM,5	
TC23	2401-001954	C-AL;4.7UF,20%,50V,GP,BK,5X11MM,5	
TC25	2401-001954	C-AL;4.7UF,20%,50V,GP,BK,5X11MM,5	
TC18	2401-001968	C-AL;470NF,20%,50V,GP,TP,5X11MM,5	
TC43	2401-001968	C-AL;470NF,20%,50V,GP,TP,5X11MM,5	
TC4	2401-001975	C-AL;47UF,20%,16V,GP,TP,5X11MM,5	
TC9	2401-001975	C-AL;47UF,20%,16V,GP,TP,5X11MM,5	

AH94-10015R ASSY-PCB,CD,MANU;CMS55HK/E, S.N.A.

	0405-000137	DIODE-VARACTOR;KV-1260,20V,100NA,T0-92S	
	2001-000331	R-CARBON;12KOHM,5%,1/8W,AA,TP,-	
	2001-000522	R-CARBON;22Kohm,5%,1/8W,AA,TP,1.8x3.2mm	
	2201-000928	C-CERAMIC,DISC;2.7NF,20%,16V,Y5R,TP,3.5X1.9,-	
	2903-000102	FILTER-CERAMIC;BP,10.7MHZ+-25KHZ,150KHZ+-50KH	
	2903-000102	FILTER-CERAMIC;BP,10.7MHZ+-25KHZ,150KHZ+-50KH	
	3716-000210	TERMINAL-BLOCK;-,-,-,60V,7A	
	AH27-00007A	COIL-OSC;LKS7FB00-0060BLO-0,-,LW OSC	
	AH27-00008A	COIL-OSC;LKS75M00-0060LMO-0,-,MW OSC	
	AH27-00011A	COIL-OSC;LKS75M00-X000262-0,-,LW ANT	
	AH27-00012A	COIL-OSC;LKS75M00-X000263-0,365UH,MW ANT	
	AH40-10025S	TUNER-FM;KST-F404VA-1,4G,75ohm	

Location no.	Code no.	Description & Specification	Remarks
	AH90-30545G	**ASSY-FRONT COM PCB;940,CE**	**S.N.A.**
UX2	2801-001394	CRYSTAL-UNIT;32.768KHz,20ppm,28-AAY,12.5pF,	
UX1	2802-000181	RESONATOR-CERAMIC;6MHZ,0.3%,BK,9.0X4.0X7.5MM	
VR	3406-001022	SWITCH-ROTARY;5V,0.5mA,24Pulse/no click,12mm	
JOG	3406-001023	SWITCH-ROTARY;5V,0.5mA,24detent/click,12mm	
UCW8	3708-000454	CONNECTOR-FPC/FC/PIC;22P,1.25MM,STRAIGHT,	
UCW3	3710-001045	CONNECTOR-SOCKET;22P,1R,1.25MM,ANGLE,SN	
	3710-001046	CONNECTOR-SOCKET;10P,1R,1.25MM,ANGLE,SN	
UCW5	3711-000814	CONNECTOR-HEADER;BOX,2P,1R,2.5mm,ANGLE,SN	
REM1	AC59-60060A	MODULE-REMOCON;GP1U281R,SHARP,38KHZ,-,-,-,-	
VFD	AH07-20046C	VF-MAX940 DISPLAY;SVA-12MM19,12 SEG,100X2	
UIC1	AH09-00001A	IC-MICOM;LC866548V,100P,-,-,-	
UIC3	AH14-10007D	IC;NJU3716M,SOP,STICK EXPANDER 16BIT	
UCW7	AH39-00020A	LEAD-CONNECTOR ASSY;-,GT201-13,35023,13P,150MM,1007#28	
UCW1	AH39-20012W	LEAD-CONNECTOR ASS'Y;SC25,JC25,2P,150MM,1007#26	
GND	AH39-50001L	LEAD-FASTEN;RING,1007#24,200MM,BLK	
	AH61-20539A	HOLDER-VFD;-,ABS,94HB,BLK,-,MAX940	
UD1	0401-000101	DIODE-SWITCHING;1N4148,100V,200mA,DO-35,TP	
UD11	0401-000101	DIODE-SWITCHING;1N4148,100V,200mA,DO-35,TP	
UD16	0401-000101	DIODE-SWITCHING;1N4148,100V,200mA,DO-35,TP	
UD17	0401-000101	DIODE-SWITCHING;1N4148,100V,200mA,DO-35,TP	
UD18	0401-000101	DIODE-SWITCHING;1N4148,100V,200mA,DO-35,TP	
UD19	0401-000101	DIODE-SWITCHING;1N4148,100V,200mA,DO-35,TP	
UD2	0401-000101	DIODE-SWITCHING;1N4148,100V,200mA,DO-35,TP	
UD20	0401-000101	DIODE-SWITCHING;1N4148,100V,200mA,DO-35,TP	
UD22	0401-000101	DIODE-SWITCHING;1N4148,100V,200mA,DO-35,TP	
UD12	0402-000127	DIODE-RECTIFIER;1N4002,100V,1A,DO-41,TP	
UD13	0402-000127	DIODE-RECTIFIER;1N4002,100V,1A,DO-41,TP	
UD14	0402-000127	DIODE-RECTIFIER;1N4002,100V,1A,DO-41,TP	
UD15	0402-000127	DIODE-RECTIFIER;1N4002,100V,1A,DO-41,TP	
UZD1	0403-001010	DIODE-ZENER;UZP5.6B,5.6V,5.2-6.0V	
UQ1	0501-000398	TR-SMALL SIGNAL;KSC945,NPN,250mW,TO-92,TP,120-	
UQ10	0501-000398	TR-SMALL SIGNAL;KSC945,NPN,250mW,TO-92,TP,120-	
UQ11	0501-000398	TR-SMALL SIGNAL;KSC945,NPN,250mW,TO-92,TP,120-	
UQ2	0501-000398	TR-SMALL SIGNAL;KSC945,NPN,250mW,TO-92,TP,120-	
UQ3	0501-000398	TR-SMALL SIGNAL;KSC945,NPN,250mW,TO-92,TP,120-	
UQ15	0501-000610	TR-SMALL SIGNAL;KSA928A-Y,PNP,1W,TO-92L,TP,160	
UQ16	0501-000610	TR-SMALL SIGNAL;KSA928A-Y,PNP,1W,TO-92L,TP,160	
UQ7	0501-000610	TR-SMALL SIGNAL;KSA928A-Y,PNP,1W,TO-92L,TP,160	
UQ12	0504-000118	TR-DIGITAL;KSR1003,NPN,300mW,22K-22K,TO-9	
UQ13	0504-000118	TR-DIGITAL;KSR1003,NPN,300mW,22K-22K,TO-9	
UQ14	0504-000118	TR-DIGITAL;KSR1003,NPN,300mW,22K-22K,TO-9	
UQ4	0504-000118	TR-DIGITAL;KSR1003,NPN,300mW,22K-22K,TO-9	
UQ5	0504-000118	TR-DIGITAL;KSR1003,NPN,300mW,22K-22K,TO-9	
UQ6	0504-000118	TR-DIGITAL;KSR1003,NPN,300mW,22K-22K,TO-9	
UQ8	0504-000122	TR-DIGITAL;KSR1009Y,NPN,300mW,4.7K,TO-92,	
UQ9	0504-000122	TR-DIGITAL;KSR1009Y,NPN,300mW,4.7K,TO-92,	
ULD12	0601-001218	LED;INVERTER,AMB,3mm,610nm	
ULD15	0601-001218	LED;INVERTER,AMB,3mm,610nm	
ULD6	0601-001218	LED;INVERTER,AMB,3mm,610nm	
ULD9	0601-001218	LED;INVERTER,AMB,3mm,610nm	
-	0601-001232	LED;TR,LED,1PCS,130-260%	
ULD10	0601-001232	LED;TR,LED,1PCS,130-260%	
ULD11	0601-001232	LED;TR,LED,1PCS,130-260%	
ULD13	0601-001232	LED;TR,LED,1PCS,130-260%	
ULD14	0601-001232	LED;TR,LED,1PCS,130-260%	
ULD16	0601-001232	LED;TR,LED,1PCS,130-260%	
ULD17	0601-001232	LED;TR,LED,1PCS,130-260%	
ULD18	0601-001232	LED;TR,LED,1PCS,130-260%	
ULD5	0601-001232	LED;TR,LED,1PCS,130-260%	
ULD7	0601-001232	LED;TR,LED,1PCS,130-260%	
ULD8	0601-001232	LED;TR,LED,1PCS,130-260%	
	0601-001238	LED;ROUND,RED,3.1mm,697nm	
UQ19	1203-000276	IC-POSI.FIXED REG.;7805,TO-220,3P,-,PLASTIC,4.8/5	
UR120	2001-000221	R-CARBON;1.2KOHM,5%,1/8W,AA,TP,-	
UR126	2001-000221	R-CARBON;1.2KOHM,5%,1/8W,AA,TP,-	
UR127	2001-000221	R-CARBON;1.2KOHM,5%,1/8W,AA,TP,-	
UR57	2001-000221	R-CARBON;1.2KOHM,5%,1/8W,AA,TP,-	
UR58	2001-000221	R-CARBON;1.2KOHM,5%,1/8W,AA,TP,-	
UR72	2001-000221	R-CARBON;1.2KOHM,5%,1/8W,AA,TP,-	
UR73	2001-000221	R-CARBON;1.2KOHM,5%,1/8W,AA,TP,-	
UR125	2001-000241	R-CARBON;1.5Kohm,5%,1/8W,AA,TP,1.8x3.2m	
UR26	2001-000241	R-CARBON;1.5Kohm,5%,1/8W,AA,TP,1.8x3.2m	
UR71	2001-000241	R-CARBON;1.5Kohm,5%,1/8W,AA,TP,1.8x3.2m	
UR124	2001-000258	R-CARBON;1.8KOHM,5%,1/8W,AA,TP,-	
UR25	2001-000258	R-CARBON;1.8KOHM,5%,1/8W,AA,TP,-	
UR67	2001-000258	R-CARBON;1.8KOHM,5%,1/8W,AA,TP,-	
UR116	2001-000273	R-CARBON;100KOHM,5%,1/8W,AA,TP,-	
UR122	2001-000273	R-CARBON;100KOHM,5%,1/8W,AA,TP,-	
UR123	2001-000273	R-CARBON;100KOHM,5%,1/8W,AA,TP,-	
UR28	2001-000273	R-CARBON;100KOHM,5%,1/8W,AA,TP,-	
UR29	2001-000273	R-CARBON;100KOHM,5%,1/8W,AA,TP,-	
UR36	2001-000273	R-CARBON;100KOHM,5%,1/8W,AA,TP,-	
UR61	2001-000273	R-CARBON;100KOHM,5%,1/8W,AA,TP,-	
UR65	2001-000273	R-CARBON;100KOHM,5%,1/8W,AA,TP,-	
UR69	2001-000273	R-CARBON;100KOHM,5%,1/8W,AA,TP,-	
UR79	2001-000273	R-CARBON;100KOHM,5%,1/8W,AA,TP,-	
ANDU	2001-000290	R-CARBON;10KOHM,5%,1/8W,AA,TP,-	
JW117	2001-000290	R-CARBON;10KOHM,5%,1/8W,AA,TP,-	
UR10	2001-000290	R-CARBON;10KOHM,5%,1/8W,AA,TP,-	
UR11	2001-000290	R-CARBON;10KOHM,5%,1/8W,AA,TP,-	
UR111	2001-000290	R-CARBON;10KOHM,5%,1/8W,AA,TP,-	
UR112	2001-000290	R-CARBON;10KOHM,5%,1/8W,AA,TP,-	
UR115	2001-000290	R-CARBON;10KOHM,5%,1/8W,AA,TP,-	
UR12	2001-000290	R-CARBON;10KOHM,5%,1/8W,AA,TP,-	
UR30	2001-000290	R-CARBON;10KOHM,5%,1/8W,AA,TP,-	
UR32	2001-000290	R-CARBON;10KOHM,5%,1/8W,AA,TP,-	
UR35	2001-000290	R-CARBON;10KOHM,5%,1/8W,AA,TP,-	
UR55	2001-000290	R-CARBON;10KOHM,5%,1/8W,AA,TP,-	
UR56	2001-000290	R-CARBON;10KOHM,5%,1/8W,AA,TP,-	
UR6	2001-000290	R-CARBON;10KOHM,5%,1/8W,AA,TP,-	
UR60	2001-000290	R-CARBON;10KOHM,5%,1/8W,AA,TP,-	
UR62	2001-000290	R-CARBON;10KOHM,5%,1/8W,AA,TP,-	
UR63	2001-000290	R-CARBON;10KOHM,5%,1/8W,AA,TP,-	
UR68	2001-000290	R-CARBON;10KOHM,5%,1/8W,AA,TP,-	
UR7	2001-000290	R-CARBON;10KOHM,5%,1/8W,AA,TP,-	
UR8	2001-000290	R-CARBON;10KOHM,5%,1/8W,AA,TP,-	
UR9	2001-000290	R-CARBON;10KOHM,5%,1/8W,AA,TP,-	
UR98	2001-000290	R-CARBON;10KOHM,5%,1/8W,AA,TP,-	
UR99	2001-000290	R-CARBON;10KOHM,5%,1/8W,AA,TP,-	
UXR1	2001-000295	R-CARBON;10Mohm,5%,1/8W,AA,TP,1.8x3.2mm	
UR1	2001-000362	R-CARBON;150ohm,5%,1/8W,AA,TP,1.8x3.2mm	
UR15	2001-000362	R-CARBON;150ohm,5%,1/8W,AA,TP,1.8x3.2mm	
UR2	2001-000362	R-CARBON;150ohm,5%,1/8W,AA,TP,1.8x3.2mm	
UR3	2001-000362	R-CARBON;150ohm,5%,1/8W,AA,TP,1.8x3.2mm	
UR38	2001-000362	R-CARBON;150ohm,5%,1/8W,AA,TP,1.8x3.2mm	
UR50	2001-000362	R-CARBON;150ohm,5%,1/8W,AA,TP,1.8x3.2mm	
UR53	2001-000362	R-CARBON;150ohm,5%,1/8W,AA,TP,1.8x3.2mm	
UR70	2001-000362	R-CARBON;150ohm,5%,1/8W,AA,TP,1.8x3.2mm	
UR75	2001-000362	R-CARBON;150ohm,5%,1/8W,AA,TP,1.8x3.2mm	
UR76	2001-000362	R-CARBON;150ohm,5%,1/8W,AA,TP,1.8x3.2mm	
UR77	2001-000362	R-CARBON;150ohm,5%,1/8W,AA,TP,1.8x3.2mm	
UR78	2001-000362	R-CARBON;150ohm,5%,1/8W,AA,TP,1.8x3.2mm	
UR80	2001-000362	R-CARBON;150ohm,5%,1/8W,AA,TP,1.8x3.2mm	
UR81	2001-000362	R-CARBON;150ohm,5%,1/8W,AA,TP,1.8x3.2mm	
UR82	2001-000362	R-CARBON;150ohm,5%,1/8W,AA,TP,1.8x3.2mm	
UR92	2001-000362	R-CARBON;150ohm,5%,1/8W,AA,TP,1.8x3.2mm	
UR33	2001-000397	R-CARBON;180Kohm,5%,1/8W,AA,TP,1.8x3.2m	
AND	2001-000411	R-CARBON;18KOHM,5%,1/8W,AA,TP,-	
U	2001-000411	R-CARBON;18KOHM,5%,1/8W,AA,TP,-	
UD12	2001-000411	R-CARBON;18KOHM,5%,1/8W,AA,TP,-	
FREE	2001-000429	R-CARBON;1KOHM,5%,1/8W,AA,TP,-	
JW86	2001-000429	R-CARBON;1KOHM,5%,1/8W,AA,TP,-	
UR102	2001-000429	R-CARBON;1KOHM,5%,1/8W,AA,TP,-	
UR103	2001-000429	R-CARBON;1KOHM,5%,1/8W,AA,TP,-	
UR104	2001-000429	R-CARBON;1KOHM,5%,1/8W,AA,TP,-	
UR105	2001-000429	R-CARBON;1KOHM,5%,1/8W,AA,TP,-	
UR106	2001-000429	R-CARBON;1KOHM,5%,1/8W,AA,TP,-	
UR107	2001-000429	R-CARBON;1KOHM,5%,1/8W,AA,TP,-	
UR108	2001-000429	R-CARBON;1KOHM,5%,1/8W,AA,TP,-	
UR109	2001-000429	R-CARBON;1KOHM,5%,1/8W,AA,TP,-	
UR110	2001-000429	R-CARBON;1KOHM,5%,1/8W,AA,TP,-	
UR113	2001-000429	R-CARBON;1KOHM,5%,1/8W,AA,TP,-	
UR114	2001-000429	R-CARBON;1KOHM,5%,1/8W,AA,TP,-	
UR14	2001-000429	R-CARBON;1KOHM,5%,1/8W,AA,TP,-	
UR59	2001-000429	R-CARBON;1KOHM,5%,1/8W,AA,TP,-	
UR83	2001-000429	R-CARBON;1KOHM,5%,1/8W,AA,TP,-	
UR84	2001-000429	R-CARBON;1KOHM,5%,1/8W,AA,TP,-	
UR85	2001-000429	R-CARBON;1KOHM,5%,1/8W,AA,TP,-	
UR86	2001-000429	R-CARBON;1KOHM,5%,1/8W,AA,TP,-	
UR87	2001-000429	R-CARBON;1KOHM,5%,1/8W,AA,TP,-	
UR88	2001-000429	R-CARBON;1KOHM,5%,1/8W,AA,TP,-	
UR89	2001-000429	R-CARBON;1KOHM,5%,1/8W,AA,TP,-	
UR90	2001-000429	R-CARBON;1KOHM,5%,1/8W,AA,TP,-	
UR91	2001-000429	R-CARBON;1KOHM,5%,1/8W,AA,TP,-	
UR93	2001-000429	R-CARBON;1KOHM,5%,1/8W,AA,TP,-	
UR94	2001-000429	R-CARBON;1KOHM,5%,1/8W,AA,TP,-	
UR95	2001-000429	R-CARBON;1KOHM,5%,1/8W,AA,TP,-	
UR96	2001-000429	R-CARBON;1KOHM,5%,1/8W,AA,TP,-	
-	2001-000449	R-CARBON;2.2Kohm,5%,1/8W,AA,TP,1.8x3.2m	
UR17	2001-000449	R-CARBON;2.2Kohm,5%,1/8W,AA,TP,1.8x3.2m	
UR66	2001-000449	R-CARBON;2.2Kohm,5%,1/8W,AA,TP,1.8x3.2m	
UR119	2001-000472	R-CARBON;2.7KOHM,5%,1/8W,AA,TP,-	
UR66	2001-000472	R-CARBON;2.7KOHM,5%,1/8W,AA,TP,-	
UR4	2001-000508	R-CARBON;220Kohm,5%,1/8W,AA,TP,1.8x3.2m	
UAR1	2001-000522	R-CARBON;22Kohm,5%,1/8W,AA,TP,1.8x3.2mm	
UR129	2001-000734	R-CARBON;4.7KOHM,5%,1/8W,AA,TP,-	
UR16	2001-000734	R-CARBON;4.7KOHM,5%,1/8W,AA,TP,-	
UR22	2001-000734	R-CARBON;4.7KOHM,5%,1/8W,AA,TP,-	
UR23	2001-000734	R-CARBON;4.7KOHM,5%,1/8W,AA,TP,-	
UR39	2001-000734	R-CARBON;4.7KOHM,5%,1/8W,AA,TP,-	
UR40	2001-000734	R-CARBON;4.7KOHM,5%,1/8W,AA,TP,-	
UR41	2001-000734	R-CARBON;4.7KOHM,5%,1/8W,AA,TP,-	
UR42	2001-000734	R-CARBON;4.7KOHM,5%,1/8W,AA,TP,-	
UR43	2001-000734	R-CARBON;4.7KOHM,5%,1/8W,AA,TP,-	
UR44	2001-000734	R-CARBON;4.7KOHM,5%,1/8W,AA,TP,-	
UR45	2001-000734	R-CARBON;4.7KOHM,5%,1/8W,AA,TP,-	
UR46	2001-000734	R-CARBON;4.7KOHM,5%,1/8W,AA,TP,-	
UR47	2001-000734	R-CARBON;4.7KOHM,5%,1/8W,AA,TP,-	
UR48	2001-000734	R-CARBON;4.7KOHM,5%,1/8W,AA,TP,-	
UR49	2001-000734	R-CARBON;4.7KOHM,5%,1/8W,AA,TP,-	
UR120	2001-000780	R-CARBON;470OHM,5%,1/8W,AA,TP,-	
UR5	2001-000793	R-CARBON;47ohm,5%,1/8W,AA,TP,1.8x3.2mm	
UR24	2001-000802	R-CARBON;5.6Kohm,5%,1/8W,AA,TP,1.8x3.2m	
UR100	2001-000924	R-CARBON;680ohm,5%,1/8W,AA,TP,1.8x3.2mm	
UR117	2001-000924	R-CARBON;680ohm,5%,1/8W,AA,TP,1.8x3.2mm	

Location no.	Code no.	Description & Specification	Remarks
UR118	2001-000924	R-CARBON;680ohm,5%,1/8W,AA,TP,1.8x3.2mm	
UR13	2001-000924	R-CARBON;680ohm,5%,1/8W,AA,TP,1.8x3.2mm	
UR37	2001-000924	R-CARBON;680ohm,5%,1/8W,AA,TP,1.8x3.2mm	
UR52	2001-000924	R-CARBON;680ohm,5%,1/8W,AA,TP,1.8x3.2mm	
UR54	2001-000924	R-CARBON;680ohm,5%,1/8W,AA,TP,1.8x3.2mm	
UR64	2001-000924	R-CARBON;680ohm,5%,1/8W,AA,TP,1.8x3.2mm	
UR97	2001-000924	R-CARBON;680ohm,5%,1/8W,AA,TP,1.8x3.2mm	
UR101	2001-000995	R-CARBON;820OHM,5%,1/8W,AA,TP,-	
UR128	2001-000995	R-CARBON;820OHM,5%,1/8W,AA,TP,-	
UR19	2001-000995	R-CARBON;820OHM,5%,1/8W,AA,TP,-	
UR34	2001-000995	R-CARBON;820OHM,5%,1/8W,AA,TP,-	
UR51	2001-000995	R-CARBON;820OHM,5%,1/8W,AA,TP,-	
UR74	2001-000995	R-CARBON;820OHM,5%,1/8W,AA,TP,-	
UR20	2003-000587	R-METAL OXIDE(S);22ohm,5%,1W,AA,TP,3.3x9mm	
UVR2	2103-000004	VR-SEMI;2Kohm,30%,1/10W,SIDE	
UC17	2201-000247	C-CERAMIC,DISC;15pF,5%,50V,CH,TP,5x3,5	
UC18	2201-000247	C-CERAMIC,DISC;15pF,5%,50V,CH,TP,5x3,5	
UC26	2201-000300	C-CERAMIC,DISC;1NF,20%,50V,Y5T,TP,5X3,5	
UC19	2201-000423	C-CERAMIC,DISC;27pF,5%,50V,NPO,TP,5x3,2.5	
UC20	2201-000423	C-CERAMIC,DISC;27pF,5%,50V,NPO,TP,5x3,2.5	
UC22	2201-000426	C-CERAMIC,DISC;27pF,5%,50V,SL,TP,5x3,5	
UC21	2201-000557	C-CERAMIC,DISC;470pF,10%,50V,SL,TP,8x3,5	
UC15	2201-000565	C-CERAMIC,DISC;47nF,20%,50V,Y5V,12.5x4.0mm,5mm,TP	
UC27	2201-000565	C-CERAMIC,DISC;47nF,20%,50V,Y5V,12.5x4.0mm,5mm,TP	
UC29	2202-000796	C-CERAMIC,MLC-AXIAL;1nF,10%,50V,Y5P,TP,3.5x19,-	
UC6	2202-000809	C-CERAMIC,MLC-AXIAL;3.3NF,20%,16V,Y5R,TP,3.5X19,-	
UC13	2202-000854	C-CERAMIC,MLC-AXIAL;47NF,30%,50V,Y5R,TP,3.5X1.9,-	
UC14	2202-000854	C-CERAMIC,MLC-AXIAL;47NF,30%,50V,Y5R,TP,3.5X1.9,-	
UC2	2202-000854	C-CERAMIC,MLC-AXIAL;47NF,30%,50V,Y5R,TP,3.5X1.9,-	
UC12	2401-000240	C-AL;100uF,20%,10V,GP,TP,5x11,5	
UC16	2401-000475	C-AL;10UF,20%,50V,GP,-,5X11,2MM	
UC28	2401-000475	C-AL;10UF,20%,50V,GP,-,5X11,2MM	
UC5	2401-000795	C-AL;220UF,20%,16V,GP,-,8X11.5,3.5M	
UC23	2401-000918	C-AL;22uF,20%,16V,GP,-,6.3x7,5	
UC24	2401-000918	C-AL;22uF,20%,16V,GP,-,6.3x7,5	
UC10	2401-001511	C-AL;47UF,20%,16V,GP,-,6X7,5	
UC8	2401-001511	C-AL;47UF,20%,16V,GP,-,6X7,5	
UC25	2401-001917	C-AL;1UF,20%,50V,-,TP,5X7MM,5	
UC7	2401-001917	C-AL;1UF,20%,50V,-,TP,5X7MM,5	
UC4	2401-001931	C-AL;220NF,20%,50V,-,TP,4X7MM,5	
UC11	2401-001952	C-AL;4.7UF,20%,50V,-,TP,6.3X7,5	
UC3	2401-001952	C-AL;4.7UF,20%,50V,-,TP,6.3X7,5	
UC9	2401-001952	C-AL;4.7UF,20%,50V,-,TP,6.3X7,5	
UC1	2409-000123	C-EDL;47000UF,4UA,5.5V,-,BK,-,5MM	
SW1	3404-000165	SWITCH-TACT;12V,50MA,160GF+-50GF,6X6MM,SPS	
SW10	3404-000165	SWITCH-TACT;12V,50MA,160GF+-50GF,6X6MM,SPS	
SW11	3404-000165	SWITCH-TACT;12V,50MA,160GF+-50GF,6X6MM,SPS	
SW12	3404-000165	SWITCH-TACT;12V,50MA,160GF+-50GF,6X6MM,SPS	
SW13	3404-000165	SWITCH-TACT;12V,50MA,160GF+-50GF,6X6MM,SPS	
SW14	3404-000165	SWITCH-TACT;12V,50MA,160GF+-50GF,6X6MM,SPS	
SW15	3404-000165	SWITCH-TACT;12V,50MA,160GF+-50GF,6X6MM,SPS	
SW16	3404-000165	SWITCH-TACT;12V,50MA,160GF+-50GF,6X6MM,SPS	
SW17	3404-000165	SWITCH-TACT;12V,50MA,160GF+-50GF,6X6MM,SPS	
SW18	3404-000165	SWITCH-TACT;12V,50MA,160GF+-50GF,6X6MM,SPS	
SW19	3404-000165	SWITCH-TACT;12V,50MA,160GF+-50GF,6X6MM,SPS	
SW2	3404-000165	SWITCH-TACT;12V,50MA,160GF+-50GF,6X6MM,SPS	
SW20	3404-000165	SWITCH-TACT;12V,50MA,160GF+-50GF,6X6MM,SPS	
SW21	3404-000165	SWITCH-TACT;12V,50MA,160GF+-50GF,6X6MM,SPS	
SW22	3404-000165	SWITCH-TACT;12V,50MA,160GF+-50GF,6X6MM,SPS	
SW23	3404-000165	SWITCH-TACT;12V,50MA,160GF+-50GF,6X6MM,SPS	
SW24	3404-000165	SWITCH-TACT;12V,50MA,160GF+-50GF,6X6MM,SPS	
SW25	3404-000165	SWITCH-TACT;12V,50MA,160GF+-50GF,6X6MM,SPS	
SW26	3404-000165	SWITCH-TACT;12V,50MA,160GF+-50GF,6X6MM,SPS	
SW27	3404-000165	SWITCH-TACT;12V,50MA,160GF+-50GF,6X6MM,SPS	
SW28	3404-000165	SWITCH-TACT;12V,50MA,160GF+-50GF,6X6MM,SPS	
SW3	3404-000165	SWITCH-TACT;12V,50MA,160GF+-50GF,6X6MM,SPS	
SW4	3404-000165	SWITCH-TACT;12V,50MA,160GF+-50GF,6X6MM,SPS	
SW5	3404-000165	SWITCH-TACT;12V,50MA,160GF+-50GF,6X6MM,SPS	
SW6	3404-000165	SWITCH-TACT;12V,50MA,160GF+-50GF,6X6MM,SPS	
SW7	3404-000165	SWITCH-TACT;12V,50MA,160GF+-50GF,6X6MM,SPS	
SW8	3404-000165	SWITCH-TACT;12V,50MA,160GF+-50GF,6X6MM,SPS	
SW9	3404-000165	SWITCH-TACT;12V,50MA,160GF+-50GF,6X6MM,SPS	
	AH39-00019A	LEAD-CONNECTOR ASSY;-,GT201-11,35023,11P,150MM,1007#28	

AH90-30545H ASS-MAIN COM PCB;940,CE **S.N.A.**

AD1	0401-000101	DIODE-SWITCHING;1N4148,100V,200mA,DO-35,TP	
AD2	0401-000101	DIODE-SWITCHING;1N4148,100V,200mA,DO-35,TP	
AD3	0401-000101	DIODE-SWITCHING;1N4148,100V,200mA,DO-35,TP	
AD4	0401-000101	DIODE-SWITCHING;1N4148,100V,200mA,DO-35,TP	
AD5	0401-000101	DIODE-SWITCHING;1N4148,100V,200mA,DO-35,TP	
DD1	0401-000101	DIODE-SWITCHING;1N4148,100V,200mA,DO-35,TP	
DD2	0401-000101	DIODE-SWITCHING;1N4148,100V,200mA,DO-35,TP	
DD3	0401-000101	DIODE-SWITCHING;1N4148,100V,200mA,DO-35,TP	
DD4	0401-000101	DIODE-SWITCHING;1N4148,100V,200mA,DO-35,TP	
DD5	0401-000101	DIODE-SWITCHING;1N4148,100V,200mA,DO-35,TP	
DD6	0401-000101	DIODE-SWITCHING;1N4148,100V,200mA,DO-35,TP	
FD2	0401-000101	DIODE-SWITCHING;1N4148,100V,200mA,DO-35,TP	
PD3	0401-000101	DIODE-SWITCHING;1N4148,100V,200mA,DO-35,TP	
PD7	0401-000101	DIODE-SWITCHING;1N4148,100V,200mA,DO-35,TP	
PD1	0402-000127	DIODE-RECTIFIER;1N4002,100V,1A,DO-41,TP	
PD2	0402-000127	DIODE-RECTIFIER;1N4002,100V,1A,DO-41,TP	
PD4	0402-000127	DIODE-RECTIFIER;1N4002,100V,1A,DO-41,TP	
PD6	0402-000151	DIODE-RECTIFIER;1N5392,100V,1.5A,DO-15,TP	
PZD5	0403-000354	DIODE-ZENER;UZ5.1B,5.1V,4.8-5.4V,500mW,DO-	
PZD9	0403-000354	DIODE-ZENER;UZ5.1B,5.1V,4.8-5.4V,500mW,DO-	
PZD4	0403-000377	DIODE-ZENER;UZP10B,10V,9.4-10.6V,1W,DO-41,	
PZD6	0403-000377	DIODE-ZENER;UZP10B,10V,9.4-10.6V,1W,DO-41,	
PZD7	0403-000379	DIODE-ZENER;UZP12B,12V,11.4-12.6V,1W,DO-41	
PZD8	0403-000379	DIODE-ZENER;UZP12B,12V,11.4-12.6V,1W,DO-41	
PZD3	0403-000396	DIODE-ZENER;UZP6.8B,6.8V,6.4-7.2V,1W,DO	
PZD1	0403-000564	DIODE-ZENER;TZP16A,16V,15.3-17.1V,1W,DO-41	
PZD2	0403-000564	DIODE-ZENER;TZP16A,16V,15.3-17.1V,1W,DO-41	
DQ22	0501-000010	TR-SMALL SIGNAL;KSC1008,NPN,800mW,TO-92,TP,120	
DQ7	0501-000010	TR-SMALL SIGNAL;KSC1008,NPN,800mW,TO-92,TP,120	
DQ8	0501-000010	TR-SMALL SIGNAL;KSC1008,NPN,800mW,TO-92,TP,120	
DQ9	0501-000010	TR-SMALL SIGNAL;KSC1008,NPN,800mW,TO-92,TP,120	
FQ4	0501-000010	TR-SMALL SIGNAL;KSC1008,NPN,800mW,TO-92,TP,120	
PQ3	0501-000010	TR-SMALL SIGNAL;KSC1008,NPN,800mW,TO-92,TP,120	
PQ5	0501-000010	TR-SMALL SIGNAL;KSC1008,NPN,800mW,TO-92,TP,120	
PQ6	0501-000010	TR-SMALL SIGNAL;KSC1008,NPN,800mW,TO-92,TP,120	
AQ12	0501-000294	TR-SMALL SIGNAL;KSA708-Y,PNP,800mW,TO-92,TP,12	
AQ4	0501-000294	TR-SMALL SIGNAL;KSA708-Y,PNP,800mW,TO-92,TP,12	
PQ10	0501-000294	TR-SMALL SIGNAL;KSA708-Y,PNP,800mW,TO-92,TP,12	
PQ8	0501-000294	TR-SMALL SIGNAL;KSA708-Y,PNP,800mW,TO-92,TP,12	
AQ22	0501-000296	TR-SMALL SIGNAL;KSA709-Y,PNP,800mW,TO-92,TP,12	
AQ17	0501-000331	TR-SMALL SIGNAL;KSC1009-Y,NPN,800mW,TO-92,-,12	
AQ18	0501-000331	TR-SMALL SIGNAL;KSC1009-Y,NPN,800mW,TO-92,-,12	
PQ17	0501-000331	TR-SMALL SIGNAL;KSC1009-Y,NPN,800mW,TO-92,-,12	
AQ19	0501-000354	TR-SMALL SIGNAL;KSC1845-F,NPN,500MW,TO-92,TP,3	
AQ2	0501-000354	TR-SMALL SIGNAL;KSC1845-F,NPN,500MW,TO-92,TP,3	
AQ20	0501-000354	TR-SMALL SIGNAL;KSC1845-F,NPN,500MW,TO-92,TP,3	
AQ3	0501-000354	TR-SMALL SIGNAL;KSC1845-F,NPN,500MW,TO-92,TP,3	
DQ5	0501-000369	TR-SMALL SIGNAL;KSC2331-Y,NPN,1W,TO-92L,-,120-	
AAQ1	0501-000398	TR-SMALL SIGNAL;KSC945,NPN,250mW,TO-92,TP,120-	
AAQ2	0501-000398	TR-SMALL SIGNAL;KSC945,NPN,250mW,TO-92,TP,120-	
AQ1	0501-000398	TR-SMALL SIGNAL;KSC945,NPN,250mW,TO-92,TP,120-	
AQ16	0501-000398	TR-SMALL SIGNAL;KSC945,NPN,250mW,TO-92,TP,120-	
AQ23	0501-000398	TR-SMALL SIGNAL;KSC945,NPN,250mW,TO-92,TP,120-	
DQ13	0501-000398	TR-SMALL SIGNAL;KSC945,NPN,250mW,TO-92,TP,120-	
DQ19	0501-000398	TR-SMALL SIGNAL;KSC945,NPN,250mW,TO-92,TP,120-	
DQ20	0501-000398	TR-SMALL SIGNAL;KSC945,NPN,250mW,TO-92,TP,120-	
DQ21	0501-000398	TR-SMALL SIGNAL;KSC945,NPN,250mW,TO-92,TP,120-	
DQ6	0501-000398	TR-SMALL SIGNAL;KSC945,NPN,250mW,TO-92,TP,120-	
EQ1	0501-000398	TR-SMALL SIGNAL;KSC945,NPN,250mW,TO-92,TP,120-	
AQ13	0501-000407	TR-SMALL SIGNAL;KSD471A-Y,NPN,800MW,TO-92,-,12	
AQ15	0501-000407	TR-SMALL SIGNAL;KSD471A-Y,NPN,800MW,TO-92,-,12	
AQ5	0501-000407	TR-SMALL SIGNAL;KSD471A-Y,NPN,800MW,TO-92,-,12	
AQ7	0501-000407	TR-SMALL SIGNAL;KSD471A-Y,NPN,800MW,TO-92,-,12	
DQ3	0501-000407	TR-SMALL SIGNAL;KSD471A-Y,NPN,800MW,TO-92,-,12	
DQ12	0501-000610	TR-SMALL SIGNAL;KSA928A-Y,PNP,1W,TO-92L,TP,160	
DQ4	0501-000610	TR-SMALL SIGNAL;KSA928A-Y,PNP,1W,TO-92L,TP,160	
PQ11	0501-000610	TR-SMALL SIGNAL;KSA928A-Y,PNP,1W,TO-92L,TP,160	
PQ15	0501-000610	TR-SMALL SIGNAL;KSA928A-Y,PNP,1W,TO-92L,TP,160	
AQ14	0501-002188	TR-SMALL SIGNAL;KSA992,PNP,500mW,TO-92,T	
AQ6	0501-002188	TR-SMALL SIGNAL;KSA992,PNP,500mW,TO-92,T	
DQ11	0504-000118	TR-DIGITAL;KSR1003,NPN,300mW,22K-22K,TO-9	
DQ18	0504-000118	TR-DIGITAL;KSR1003,NPN,300mW,22K-22K,TO-9	
FQ7	0504-000118	TR-DIGITAL;KSR1003,NPN,300mW,22K-22K,TO-9	
FQ8	0504-000118	TR-DIGITAL;KSR1003,NPN,300mW,22K-22K,TO-9	
PQ13	0504-000118	TR-DIGITAL;KSR1003,NPN,300mW,22K-22K,TO-9	
PQ9	0504-000118	TR-DIGITAL;KSR1003,NPN,300mW,22K-22K,TO-9	
DQ17	0504-000122	TR-DIGITAL;KSR1009Y,NPN,300mW,4.7K,TO-92,	
FQ2	0504-000122	TR-DIGITAL;KSR1009Y,NPN,300mW,4.7K,TO-92,	
FQ3	0504-000122	TR-DIGITAL;KSR1009Y,NPN,300mW,4.7K,TO-92,	
PQ18	0504-000122	TR-DIGITAL;KSR1009Y,NPN,300mW,4.7K,TO-92,	
DQ1	0504-001003	TR-DIGITAL;KSR2003,PNP,300MW,22K-22K,TO-9	
DQ10	0504-001003	TR-DIGITAL;KSR2003,PNP,300MW,22K-22K,TO-9	
DQ2	0504-001003	TR-DIGITAL;KSR2003,PNP,300MW,22K-22K,TO-9	
FQ1	0504-001003	TR-DIGITAL;KSR2003,PNP,300MW,22K-22K,TO-9	
FQ5	0504-001003	TR-DIGITAL;KSR2003,PNP,300MW,22K-22K,TO-9	
FQ6	0504-001003	TR-DIGITAL;KSR2003,PNP,300MW,22K-22K,TO-9	
PQ14	0504-001003	TR-DIGITAL;KSR2003,PNP,300MW,22K-22K,TO-9	
PQ16	0504-001003	TR-DIGITAL;KSR2003,PNP,300MW,22K-22K,TO-9	
FIC3	1001-001065	IC-ANALOG SWITCH;NJU4066BM,CMOS,DMP,14P,	
-	1201-000163	IC-OP AMP;BA4560F-E2	
FIC1	1201-000163	IC-OP AMP;BA4560F-E2	
FIC5	1201-000163	IC-OP AMP;BA4560F-E2	
AR30	2001-000003	R-CARBON;330ohm,5%,1/8W,AA,TP,1.8x3.2mm	
AR8	2001-000003	R-CARBON;330ohm,5%,1/8W,AA,TP,1.8x3.2mm	
DR13	2001-000003	R-CARBON;330ohm,5%,1/8W,AA,TP,1.8x3.2mm	
DR52	2001-000003	R-CARBON;330ohm,5%,1/8W,AA,TP,1.8x3.2mm	
DR55	2001-000008	R-CARBON;15Kohm,5%,1/8W,AA,TP,1.8x3.2mm	
DR6	2001-000008	R-CARBON;15Kohm,5%,1/8W,AA,TP,1.8x3.2mm	
FR37	2001-000008	R-CARBON;15Kohm,5%,1/8W,AA,TP,1.8x3.2mm	
FR40	2001-000008	R-CARBON;15Kohm,5%,1/8W,AA,TP,1.8x3.2mm	
DR8	2001-000010	R-CARBON;68Kohm,5%,1/8W,AA,TP,1.8x3.2mm	
AR11	2001-000019	R-CARBON(S);10ohm,5%,1/2W,AA,TP,2.4x6.4mm	
AR28	2001-000019	R-CARBON(S);10ohm,5%,1/2W,AA,TP,2.4x6.4mm	
AR33	2001-000019	R-CARBON(S);10ohm,5%,1/2W,AA,TP,2.4x6.4mm	
AR5	2001-000019	R-CARBON(S);10ohm,5%,1/2W,AA,TP,2.4x6.4mm	
PR14	2001-000019	R-CARBON(S);10ohm,5%,1/2W,AA,TP,2.4x6.4mm	
AR28	2001-000028	R-CARBON(S);100OHM,5%,1/2W,AA,TP,-	
AR5	2001-000028	R-CARBON(S);100OHM,5%,1/2W,AA,TP,-	
PR14	2001-000028	R-CARBON(S);100OHM,5%,1/2W,AA,TP,-	
AR10	2001-000050	R-CARBON;2.7KOHM,5%,1/4W,AA,TP,-	
AR32	2001-000050	R-CARBON;2.7KOHM,5%,1/4W,AA,TP,-	

Location no.	Code no.	Description & Specifiation	Remarks
AR44	2001-000109	R-CARBON(S);470ohm,5%,1/2W,AA,TP,2.4x6.4mm	
AR45	2001-000109	R-CARBON(S);470ohm,5%,1/2W,AA,TP,2.4x6.4mm	
PR25	2001-000109	R-CARBON(S);470ohm,5%,1/2W,AA,TP,2.4x6.4mm	
PR16	2001-000117	R-CARBON(S);68ohm,5%,1/2W,AA,TP,2.4x6.4mm	
FR35	2001-000221	R-CARBON;1.2KOHM,5%,1/8W,AA,TP,-	
FR36	2001-000221	R-CARBON;1.2KOHM,5%,1/8W,AA,TP,-	
FR19	2001-000241	R-CARBON;1.5Kohm,5%,1/8W,AA,TP,1.8x3.2m	
FR20	2001-000241	R-CARBON;1.5Kohm,5%,1/8W,AA,TP,1.8x3.2m	
FR21	2001-000241	R-CARBON;1.5Kohm,5%,1/8W,AA,TP,1.8x3.2m	
FR24	2001-000241	R-CARBON;1.5Kohm,5%,1/8W,AA,TP,1.8x3.2m	
PR28	2001-000241	R-CARBON;1.5Kohm,5%,1/8W,AA,TP,1.8x3.2m	
DR78	2001-000258	R-CARBON;1.8KOHM,5%,1/8W,AA,TP,-	
DR9	2001-000258	R-CARBON;1.8KOHM,5%,1/8W,AA,TP,-	
FR35	2001-000258	R-CARBON;1.8KOHM,5%,1/8W,AA,TP,-	
FR36	2001-000258	R-CARBON;1.8KOHM,5%,1/8W,AA,TP,-	
AR15	2001-000273	R-CARBON;100KOHM,5%,1/8W,AA,TP,-	
AR40	2001-000273	R-CARBON;100KOHM,5%,1/8W,AA,TP,-	
DR9	2001-000273	R-CARBON;100KOHM,5%,1/8W,AA,TP,-	
FR53	2001-000273	R-CARBON;100KOHM,5%,1/8W,AA,TP,-	
PR37	2001-000273	R-CARBON;100KOHM,5%,1/8W,AA,TP,-	
PR50	2001-000273	R-CARBON;100KOHM,5%,1/8W,AA,TP,-	
AR16	2001-000281	R-CARBON;100ohm,5%,1/8W,AA,TP,1.8x3.2mm	
AR47	2001-000281	R-CARBON;100ohm,5%,1/8W,AA,TP,1.8x3.2mm	
CR1	2001-000281	R-CARBON;100ohm,5%,1/8W,AA,TP,1.8x3.2mm	
CR2	2001-000281	R-CARBON;100ohm,5%,1/8W,AA,TP,1.8x3.2mm	
CR3	2001-000281	R-CARBON;100ohm,5%,1/8W,AA,TP,1.8x3.2mm	
FR30	2001-000281	R-CARBON;100ohm,5%,1/8W,AA,TP,1.8x3.2mm	
FR31	2001-000281	R-CARBON;100ohm,5%,1/8W,AA,TP,1.8x3.2mm	
FR50	2001-000281	R-CARBON;100ohm,5%,1/8W,AA,TP,1.8x3.2mm	
-	2001-000290	R-CARBON;10KOHM,5%,1/8W,AA,TP,-	
AR52	2001-000290	R-CARBON;10KOHM,5%,1/8W,AA,TP,-	
AR53	2001-000290	R-CARBON;10KOHM,5%,1/8W,AA,TP,-	
DD7	2001-000290	R-CARBON;10KOHM,5%,1/8W,AA,TP,-	
DR15	2001-000290	R-CARBON;10KOHM,5%,1/8W,AA,TP,-	
DR48	2001-000290	R-CARBON;10KOHM,5%,1/8W,AA,TP,-	
DR49	2001-000290	R-CARBON;10KOHM,5%,1/8W,AA,TP,-	
DR50	2001-000290	R-CARBON;10KOHM,5%,1/8W,AA,TP,-	
DR68	2001-000290	R-CARBON;10KOHM,5%,1/8W,AA,TP,-	
DR72	2001-000290	R-CARBON;10KOHM,5%,1/8W,AA,TP,-	
FAR1	2001-000290	R-CARBON;10KOHM,5%,1/8W,AA,TP,-	
FAR2	2001-000290	R-CARBON;10KOHM,5%,1/8W,AA,TP,-	
FR10	2001-000290	R-CARBON;10KOHM,5%,1/8W,AA,TP,-	
FR2	2001-000290	R-CARBON;10KOHM,5%,1/8W,AA,TP,-	
FR25	2001-000290	R-CARBON;10KOHM,5%,1/8W,AA,TP,-	
FR26	2001-000290	R-CARBON;10KOHM,5%,1/8W,AA,TP,-	
FR27	2001-000290	R-CARBON;10KOHM,5%,1/8W,AA,TP,-	
FR34	2001-000290	R-CARBON;10KOHM,5%,1/8W,AA,TP,-	
FR4	2001-000290	R-CARBON;10KOHM,5%,1/8W,AA,TP,-	
FR51	2001-000290	R-CARBON;10KOHM,5%,1/8W,AA,TP,-	
FR9	2001-000290	R-CARBON;10KOHM,5%,1/8W,AA,TP,-	
PR11	2001-000290	R-CARBON;10KOHM,5%,1/8W,AA,TP,-	
PR12	2001-000290	R-CARBON;10KOHM,5%,1/8W,AA,TP,-	
PR15	2001-000290	R-CARBON;10KOHM,5%,1/8W,AA,TP,-	
PR18	2001-000290	R-CARBON;10KOHM,5%,1/8W,AA,TP,-	
PR36	2001-000290	R-CARBON;10KOHM,5%,1/8W,AA,TP,-	
PR7	2001-000290	R-CARBON;10KOHM,5%,1/8W,AA,TP,-	
AR21	2001-000331	R-CARBON;12KOHM,5%,1/8W,AA,TP,-	
DR12	2001-000331	R-CARBON;12KOHM,5%,1/8W,AA,TP,-	
DR34	2001-000331	R-CARBON;12KOHM,5%,1/8W,AA,TP,-	
PR10	2001-000331	R-CARBON;12KOHM,5%,1/8W,AA,TP,-	
DR19	2001-000397	R-CARBON;180Kohm,5%,1/8W,AA,TP,1.8x3.2m	
DR73	2001-000397	R-CARBON;180Kohm,5%,1/8W,AA,TP,1.8x3.2m	
AR43	2001-000411	R-CARBON;18KOHM,5%,1/8W,AA,TP,-	
AR6	2001-000411	R-CARBON;18KOHM,5%,1/8W,AA,TP,-	
FR38	2001-000411	R-CARBON;18KOHM,5%,1/8W,AA,TP,-	
FR39	2001-000411	R-CARBON;18KOHM,5%,1/8W,AA,TP,-	
FR42	2001-000411	R-CARBON;18KOHM,5%,1/8W,AA,TP,-	
FR44	2001-000411	R-CARBON;18KOHM,5%,1/8W,AA,TP,-	
AR14	2001-000429	R-CARBON;1KOHM,5%,1/8W,AA,TP,-	
AR18	2001-000429	R-CARBON;1KOHM,5%,1/8W,AA,TP,-	
AR20	2001-000429	R-CARBON;1KOHM,5%,1/8W,AA,TP,-	
AR22	2001-000429	R-CARBON;1KOHM,5%,1/8W,AA,TP,-	
AR27	2001-000429	R-CARBON;1KOHM,5%,1/8W,AA,TP,-	
AR34	2001-000429	R-CARBON;1KOHM,5%,1/8W,AA,TP,-	
AR39	2001-000429	R-CARBON;1KOHM,5%,1/8W,AA,TP,-	
AR4	2001-000429	R-CARBON;1KOHM,5%,1/8W,AA,TP,-	
AR41	2001-000429	R-CARBON;1KOHM,5%,1/8W,AA,TP,-	
AR42	2001-000429	R-CARBON;1KOHM,5%,1/8W,AA,TP,-	
DR22	2001-000429	R-CARBON;1KOHM,5%,1/8W,AA,TP,-	
DR36	2001-000429	R-CARBON;1KOHM,5%,1/8W,AA,TP,-	
DR57	2001-000429	R-CARBON;1KOHM,5%,1/8W,AA,TP,-	
DR76	2001-000429	R-CARBON;1KOHM,5%,1/8W,AA,TP,-	
PR4	2001-000429	R-CARBON;1KOHM,5%,1/8W,AA,TP,-	
AJ56	2001-000449	R-CARBON;2.2Kohm,5%,1/8W,AA,TP,1.8x3.2m	
AR19	2001-000449	R-CARBON;2.2Kohm,5%,1/8W,AA,TP,1.8x3.2m	
AR48	2001-000449	R-CARBON;2.2Kohm,5%,1/8W,AA,TP,1.8x3.2m	
AR50	2001-000449	R-CARBON;2.2Kohm,5%,1/8W,AA,TP,1.8x3.2m	
DR25	2001-000449	R-CARBON;2.2Kohm,5%,1/8W,AA,TP,1.8x3.2m	
DR27	2001-000449	R-CARBON;2.2Kohm,5%,1/8W,AA,TP,1.8x3.2m	
DR28	2001-000449	R-CARBON;2.2Kohm,5%,1/8W,AA,TP,1.8x3.2m	
DR29	2001-000449	R-CARBON;2.2Kohm,5%,1/8W,AA,TP,1.8x3.2m	
DR30	2001-000449	R-CARBON;2.2Kohm,5%,1/8W,AA,TP,1.8x3.2m	
DR31	2001-000449	R-CARBON;2.2Kohm,5%,1/8W,AA,TP,1.8x3.2m	
DR42	2001-000449	R-CARBON;2.2Kohm,5%,1/8W,AA,TP,1.8x3.2m	
DR43	2001-000449	R-CARBON;2.2Kohm,5%,1/8W,AA,TP,1.8x3.2m	
DR75	2001-000449	R-CARBON;2.2Kohm,5%,1/8W,AA,TP,1.8x3.2m	
DR77	2001-000449	R-CARBON;2.2Kohm,5%,1/8W,AA,TP,1.8x3.2m	
ER7	2001-000449	R-CARBON;2.2Kohm,5%,1/8W,AA,TP,1.8x3.2m	
FR1	2001-000449	R-CARBON;2.2Kohm,5%,1/8W,AA,TP,1.8x3.2m	
FR11	2001-000449	R-CARBON;2.2Kohm,5%,1/8W,AA,TP,1.8x3.2m	
PR26	2001-000449	R-CARBON;2.2Kohm,5%,1/8W,AA,TP,1.8x3.2m	
PR29	2001-000449	R-CARBON;2.2Kohm,5%,1/8W,AA,TP,1.8x3.2m	
DR21	2001-000472	R-CARBON;2.7KOHM,5%,1/8W,AA,TP,-	
FR14	2001-000515	R-CARBON;220ohm,5%,1/8W,AA,TP,1.8x3.2mm	
FR16	2001-000515	R-CARBON;220ohm,5%,1/8W,AA,TP,1.8x3.2mm	
FR52	2001-000515	R-CARBON;220ohm,5%,1/8W,AA,TP,1.8x3.2mm	
FR6	2001-000515	R-CARBON;220ohm,5%,1/8W,AA,TP,1.8x3.2mm	
FR8	2001-000515	R-CARBON;220ohm,5%,1/8W,AA,TP,1.8x3.2mm	
AAR1	2001-000522	R-CARBON;22Kohm,5%,1/8W,AA,TP,1.8x3.2mm	
AAR2	2001-000522	R-CARBON;22Kohm,5%,1/8W,AA,TP,1.8x3.2mm	
AAR3	2001-000522	R-CARBON;22Kohm,5%,1/8W,AA,TP,1.8x3.2mm	
AAR4	2001-000522	R-CARBON;22Kohm,5%,1/8W,AA,TP,1.8x3.2mm	
AAR5	2001-000522	R-CARBON;22Kohm,5%,1/8W,AA,TP,1.8x3.2mm	
AAR6	2001-000522	R-CARBON;22Kohm,5%,1/8W,AA,TP,1.8x3.2mm	
AR54	2001-000522	R-CARBON;22Kohm,5%,1/8W,AA,TP,1.8x3.2mm	
DR24	2001-000522	R-CARBON;22Kohm,5%,1/8W,AA,TP,1.8x3.2mm	
FR12	2001-000522	R-CARBON;22Kohm,5%,1/8W,AA,TP,1.8x3.2mm	
FR32	2001-000522	R-CARBON;22Kohm,5%,1/8W,AA,TP,1.8x3.2mm	
FR33	2001-000522	R-CARBON;22Kohm,5%,1/8W,AA,TP,1.8x3.2mm	
PR17	2001-000522	R-CARBON;22Kohm,5%,1/8W,AA,TP,1.8x3.2mm	
PR21	2001-000522	R-CARBON;22Kohm,5%,1/8W,AA,TP,1.8x3.2mm	
PR35	2001-000522	R-CARBON;22Kohm,5%,1/8W,AA,TP,1.8x3.2mm	
PR5	2001-000522	R-CARBON;22Kohm,5%,1/8W,AA,TP,1.8x3.2mm	
PR9	2001-000522	R-CARBON;22Kohm,5%,1/8W,AA,TP,1.8x3.2mm	
DR17	2001-000527	R-CARBON;22ohm,5%,1/8W,AA,TP,1.8x3.2mm	
DR46	2001-000527	R-CARBON;22ohm,5%,1/8W,AA,TP,1.8x3.2mm	
	2001-000548	R-CARBON;270Kohm,5%,1/8W,AA,TP,1.8x3.2m	
AR40	2001-000563	R-CARBON;27Kohm,5%,1/8W,AA,TP,1.8x3.2mm	
AR10	2001-000591	R-CARBON;3.3KOHM,5%,1/8W,AA,TP,-	
AR32	2001-000591	R-CARBON;3.3KOHM,5%,1/8W,AA,TP,-	
AR55	2001-000591	R-CARBON;3.3KOHM,5%,1/8W,AA,TP,-	
DR11	2001-000591	R-CARBON;3.3KOHM,5%,1/8W,AA,TP,-	
DR20	2001-000591	R-CARBON;3.3KOHM,5%,1/8W,AA,TP,-	
DR5	2001-000591	R-CARBON;3.3KOHM,5%,1/8W,AA,TP,-	
DR58	2001-000591	R-CARBON;3.3KOHM,5%,1/8W,AA,TP,-	
DR70	2001-000591	R-CARBON;3.3KOHM,5%,1/8W,AA,TP,-	
DR71	2001-000591	R-CARBON;3.3KOHM,5%,1/8W,AA,TP,-	
FR55	2001-000591	R-CARBON;3.3KOHM,5%,1/8W,AA,TP,-	
FR80	2001-000591	R-CARBON;3.3KOHM,5%,1/8W,AA,TP,-	
PR100	2001-000591	R-CARBON;3.3KOHM,5%,1/8W,AA,TP,-	
PR13	2001-000591	R-CARBON;3.3KOHM,5%,1/8W,AA,TP,-	
AR10	2001-000613	R-CARBON;3.9KOHM,5%,1/8W,AA,TP,-	
AR32	2001-000613	R-CARBON;3.9KOHM,5%,1/8W,AA,TP,-	
DR1	2001-000613	R-CARBON;3.9KOHM,5%,1/8W,AA,TP,-	
DR39	2001-000613	R-CARBON;3.9KOHM,5%,1/8W,AA,TP,-	
DR61	2001-000613	R-CARBON;3.9KOHM,5%,1/8W,AA,TP,-	
AR23	2001-000660	R-CARBON;33Kohm,5%,1/8W,AA,TP,1.8x3.2mm	
AR37	2001-000660	R-CARBON;33Kohm,5%,1/8W,AA,TP,1.8x3.2mm	
DR69	2001-000663	R-CARBON;33ohm,5%,1/2W,AA,TP,3.3x9mm	
-	2001-000702	R-CARBON;39Kohm,5%,1/8W,AA,TP,1.8x3.2mm	
PR27	2001-000702	R-CARBON;39Kohm,5%,1/8W,AA,TP,1.8x3.2mm	
DR54	2001-000708	R-CARBON;39OHM,5%,1/8W,AA,TP,-	
DR14	2001-000734	R-CARBON;4.7KOHM,5%,1/8W,AA,TP,-	
DR23	2001-000734	R-CARBON;4.7KOHM,5%,1/8W,AA,TP,-	
DR3	2001-000734	R-CARBON;4.7KOHM,5%,1/8W,AA,TP,-	
DR41	2001-000734	R-CARBON;4.7KOHM,5%,1/8W,AA,TP,-	
DR59	2001-000734	R-CARBON;4.7KOHM,5%,1/8W,AA,TP,-	
DR67	2001-000734	R-CARBON;4.7KOHM,5%,1/8W,AA,TP,-	
FR13	2001-000734	R-CARBON;4.7KOHM,5%,1/8W,AA,TP,-	
FR3	2001-000734	R-CARBON;4.7KOHM,5%,1/8W,AA,TP,-	
DR66	2001-000773	R-CARBON;470Kohm,5%,1/8W,AA,TP,1.8x3.2m	
-	2001-000780	R-CARBON;470OHM,5%,1/8W,AA,TP,-	
DR35	2001-000780	R-CARBON;470OHM,5%,1/8W,AA,TP,-	
AR31	2001-000786	R-CARBON;47Kohm,5%,1/8W,AA,TP,1.8x3.2mm	
AR52	2001-000786	R-CARBON;47Kohm,5%,1/8W,AA,TP,1.8x3.2mm	
AR53	2001-000786	R-CARBON;47Kohm,5%,1/8W,AA,TP,1.8x3.2mm	
AR9	2001-000786	R-CARBON;47Kohm,5%,1/8W,AA,TP,1.8x3.2mm	
DR10	2001-000786	R-CARBON;47Kohm,5%,1/8W,AA,TP,1.8x3.2mm	
DR26	2001-000786	R-CARBON;47Kohm,5%,1/8W,AA,TP,1.8x3.2mm	
DR44	2001-000786	R-CARBON;47Kohm,5%,1/8W,AA,TP,1.8x3.2mm	
DR47	2001-000786	R-CARBON;47Kohm,5%,1/8W,AA,TP,1.8x3.2mm	
DR56	2001-000786	R-CARBON;47Kohm,5%,1/8W,AA,TP,1.8x3.2mm	
DR63	2001-000786	R-CARBON;47Kohm,5%,1/8W,AA,TP,1.8x3.2mm	
DR7	2001-000786	R-CARBON;47Kohm,5%,1/8W,AA,TP,1.8x3.2mm	
FR15	2001-000786	R-CARBON;47Kohm,5%,1/8W,AA,TP,1.8x3.2mm	
FR17	2001-000786	R-CARBON;47Kohm,5%,1/8W,AA,TP,1.8x3.2mm	
FR28	2001-000786	R-CARBON;47Kohm,5%,1/8W,AA,TP,1.8x3.2mm	
FR29	2001-000786	R-CARBON;47Kohm,5%,1/8W,AA,TP,1.8x3.2mm	
FR42	2001-000786	R-CARBON;47Kohm,5%,1/8W,AA,TP,1.8x3.2mm	
FR44	2001-000786	R-CARBON;47Kohm,5%,1/8W,AA,TP,1.8x3.2mm	
FR48	2001-000786	R-CARBON;47Kohm,5%,1/8W,AA,TP,1.8x3.2mm	
FR49	2001-000786	R-CARBON;47Kohm,5%,1/8W,AA,TP,1.8x3.2mm	
FR5	2001-000786	R-CARBON;47Kohm,5%,1/8W,AA,TP,1.8x3.2mm	
FR7	2001-000786	R-CARBON;47Kohm,5%,1/8W,AA,TP,1.8x3.2mm	
PR30	2001-000786	R-CARBON;47Kohm,5%,1/8W,AA,TP,1.8x3.2mm	
PR33	2001-000786	R-CARBON;47Kohm,5%,1/8W,AA,TP,1.8x3.2mm	

Location no.	Code no.	Description & Specification	Remarks
DR65	2001-000793	R-CARBON;47ohm,5%,1/8W,AA,TP,1.8x3.2mm	
FR45	2001-000793	R-CARBON;47ohm,5%,1/8W,AA,TP,1.8x3.2mm	
PR24	2001-000793	R-CARBON;47ohm,5%,1/8W,AA,TP,1.8x3.2mm	
DR53	2001-000802	R-CARBON;5.6Kohm,5%,1/8W,AA,TP,1.8x3.2m	
FR46	2001-000802	R-CARBON;5.6Kohm,5%,1/8W,AA,TP,1.8x3.2m	
FR47	2001-000802	R-CARBON;5.6Kohm,5%,1/8W,AA,TP,1.8x3.2m	
PR25	2001-000857	R-CARBON;560ohm,5%,1/8W,AA,TP,1.8x3.2mm	
AR12	2001-000864	R-CARBON;56KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
AR17	2001-000864	R-CARBON;56KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
AR35	2001-000864	R-CARBON;56KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
AR46	2001-000864	R-CARBON;56KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
DR64	2001-000864	R-CARBON;56KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
FR41	2001-000864	R-CARBON;56KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
FR43	2001-000864	R-CARBON;56KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
DR51	2001-000890	R-CARBON;6.8KOHM,5%,1/8W,AA,TP,-	
PR6	2001-000890	R-CARBON;6.8KOHM,5%,1/8W,AA,TP,-	
AR13	2001-000924	R-CARBON;680ohm,5%,1/8W,AA,TP,1.8x3.2mm	
AR36	2001-000924	R-CARBON;680ohm,5%,1/8W,AA,TP,1.8x3.2mm	
DR16	2001-000924	R-CARBON;680ohm,5%,1/8W,AA,TP,1.8x3.2mm	
DR45	2001-000924	R-CARBON;680ohm,5%,1/8W,AA,TP,1.8x3.2mm	
OR1	2001-000938	R-CARBON;68ohm,5%,1/8W,AA,TP,1.8x3.2mm	
DR18	2001-000977	R-CARBON;8.2Kohm,5%,1/8W,AA,TP,1.8x3.2m	
DR37	2001-000977	R-CARBON;8.2Kohm,5%,1/8W,AA,TP,1.8x3.2m	
DR74	2001-000977	R-CARBON;8.2Kohm,5%,1/8W,AA,TP,1.8x3.2m	
AR19	2001-000995	R-CARBON;820OHM,5%,1/8W,AA,TP,-	
AR29	2001-000995	R-CARBON;820OHM,5%,1/8W,AA,TP,-	
AR7	2001-000995	R-CARBON;820OHM,5%,1/8W,AA,TP,-	
DR2	2001-001006	R-CARBON;82ohm,5%,1/8W,AA,TP,1.8x3.2mm	
DR60	2001-001006	R-CARBON;82ohm,5%,1/8W,AA,TP,1.8x3.2mm	
PR29	2001-001093	R-CARBON(S);2.2Kohm,5%,1/2W,AA,TP,2.4x6.4m	
DR33	2001-001096	R-CARBON(S);2.2ohm,5%,1/2W,AA,TP,2.4x6.4mm	
AR11	2001-001107	R-CARBON(S);220ohm,5%,1/2W,AA,TP,2.4x6.4mm	
AR33	2001-001107	R-CARBON(S);220ohm,5%,1/2W,AA,TP,2.4x6.4mm	
PR2	2001-001153	R-CARBON(S);47ohm,5%,1/2W,AA,TP,2.4x6.4mm	
PR3	2001-001153	R-CARBON(S);47ohm,5%,1/2W,AA,TP,2.4x6.4mm	
AR44	2001-001192	R-CARBON(S);820ohm,5%,1/2W,AA,TP,2.4x6.4mm	
AR45	2001-001192	R-CARBON(S);820ohm,5%,1/2W,AA,TP,2.4x6.4mm	
AR26	2003-000468	R-METAL OXIDE(S);10ohm,5%,1W,AA,TP,3.3x9mm	
AR3	2003-000468	R-METAL OXIDE(S);10ohm,5%,1W,AA,TP,3.3x9mm	
PFR1	2003-000542	R-METAL OXIDE(S);1ohm,5%,1W,AA,TP,3.3x9mm	
PR34	2003-000587	R-METAL OXIDE(S);22ohm,5%,1W,AA,TP,3.3x9mm	
PR1	2003-000734	R-METAL OXIDE(S);560ohm,5%,2W,AA,TP,4x12mm	
DVR4	2103-000171	VR-SEMI;10KOHM,30%,1/10W,TOP	
DVR1	2103-000248	VR-SEMI;200KOHM,30%,1/10W,TOP	
DVR2	2103-000248	VR-SEMI;200KOHM,30%,1/10W,TOP	
FC29	2201-000377	C-CERAMIC,DISC;220PF,5%,50V,UJ,TP,8.0X3.0,5	
FC30	2201-000377	C-CERAMIC,DISC;220PF,5%,50V,UJ,TP,8.0X3.0,5	
OC4	2201-000483	C-CERAMIC,DISC;33pF,5%,50V,CH,TP,5x3,5	
RC1	2201-000547	C-CERAMIC,DISC;4.7nF,20%,500V,Y5T,TP,8x3,5	
RC2	2201-000547	C-CERAMIC,DISC;4.7nF,20%,500V,Y5T,TP,8x3,5	
FC24	2201-000557	C-CERAMIC,DISC;470pF,10%,50V,SL,TP,8x3,5	
AC22	2201-000642	C-CERAMIC,DISC;680pF,10%,50V,Y5P,TP,5x3,2.5mm	
AC4	2201-000642	C-CERAMIC,DISC;680pF,10%,50V,Y5P,TP,5x3,2.5mm	
AC12	2201-000653	C-CERAMIC,DISC;68pF,5%,50V,SL,TP,4.0X3.5mm,2.	
AC23	2201-000653	C-CERAMIC,DISC;68pF,5%,50V,SL,TP,4.0X3.5mm,2.	
	2201-000674	C-CERAMIC,DISC;820PF,10%,50V,Y5P,BK,5.0X3.0,2	
PC11	2201-000783	C-CERAMIC,DISC;100NF,+80%,-20%,50V,Y5V,TP,8X3	
PC12	2201-000783	C-CERAMIC,DISC;100NF,+80%,-20%,50V,Y5V,TP,8X3	
PC13	2201-000783	C-CERAMIC,DISC;100NF,+80%,-20%,50V,Y5V,TP,8X3	
DC26	2202-000644	C-CERAMIC,MLC-AXIAL;33nF,10%,50V,X7R,TP,2.5x6.6,-	
FC10	2202-000644	C-CERAMIC,MLC-AXIAL;33nF,10%,50V,X7R,TP,2.5x6.6,-	
FC12	2202-000644	C-CERAMIC,MLC-AXIAL;33nF,10%,50V,X7R,TP,2.5x6.6,-	
AAC26	2202-000781	C-CERAMIC,MLC-AXIAL:100pF,10%,50V,Y5P,TP;100PF,10%,50V,Y5P,TP,3.5X19,-	
AAC27	2202-000781	C-CERAMIC,MLC-AXIAL:100pF,10%,50V,Y5P,TP;100PF,10%,50V,Y5P,TP,3.5X19,-	
DC11	2202-000781	C-CERAMIC,MLC-AXIAL:100pF,10%,50V,Y5P,TP;100PF,10%,50V,Y5P,TP,3.5X19,-	
DC15	2202-000781	C-CERAMIC,MLC-AXIAL:100pF,10%,50V,Y5P,TP;100PF,10%,50V,Y5P,TP,3.5X19,-	
DC42	2202-000781	C-CERAMIC,MLC-AXIAL:100pF,10%,50V,Y5P,TP;100PF,10%,50V,Y5P,TP,3.5X19,-	
DC55	2202-000781	C-CERAMIC,MLC-AXIAL:100pF,10%,50V,Y5P,TP;100PF,10%,50V,Y5P,TP,3.5X19,-	
DC56	2202-000781	C-CERAMIC,MLC-AXIAL:100pF,10%,50V,Y5P,TP;100PF,10%,50V,Y5P,TP,3.5X19,-	
DC9	2202-000781	C-CERAMIC,MLC-AXIAL:100pF,10%,50V,Y5P,TP;100PF,10%,50V,Y5P,TP,3.5X19,-	
DC27	2202-000796	C-CERAMIC,MLC-AXIAL:1nF,10%,50V,Y5P,TP,3.5x19,-	
DC28	2202-000796	C-CERAMIC,MLC-AXIAL:1nF,10%,50V,Y5P,TP,3.5x19,-	
DC3	2202-000796	C-CERAMIC,MLC-AXIAL:1nF,10%,50V,Y5P,TP,3.5x19,-	
DC52	2202-000806	C-CERAMIC,MLC-AXIAL:220pF,10%,50V,Y5P,TP,3.5x19,-	
DC53	2202-000806	C-CERAMIC,MLC-AXIAL:220pF,10%,50V,Y5P,TP,3.5x19,-	
FC1	2202-000806	C-CERAMIC,MLC-AXIAL:220pF,10%,50V,Y5P,TP,3.5x19,-	
FC6	2202-000806	C-CERAMIC,MLC-AXIAL:220pF,10%,50V,Y5P,TP,3.5x19,-	
-	2202-000807	C-CERAMIC,MLC-AXIAL:22NF,+80-20%,25V,Y5V,TP,3.5X19	
AAC28	2202-000807	C-CERAMIC,MLC-AXIAL:22NF,+80-20%,25V,Y5V,TP,3.5X19	
AAC29	2202-000807	C-CERAMIC,MLC-AXIAL:22NF,+80-20%,25V,Y5V,TP,3.5X19	
AAC28	2202-000820	C-CERAMIC,MLC-AXIAL:5.6NF,20%,16V,Y5R,TP,3.5X19,-	
AAC29	2202-000820	C-CERAMIC,MLC-AXIAL:5.6NF,20%,16V,Y5R,TP,3.5X19,-	
DC20	2202-000847	C-CERAMIC,MLC-AXIAL:1,8NF,30%,50V,Y5S,TP,3.5X1.9	
DC21	2202-000847	C-CERAMIC,MLC-AXIAL:1,8NF,30%,50V,Y5S,TP,3.5X1.9	
DC30	2202-000847	C-CERAMIC,MLC-AXIAL:1,8NF,30%,50V,Y5S,TP,3.5X1.9	
DC31	2202-000847	C-CERAMIC,MLC-AXIAL:1,8NF,30%,50V,Y5S,TP,3.5X1.9	
FAC3	2202-000854	C-CERAMIC,MLC-AXIAL:47NF,30%,50V,Y5R,TP,3.5X1.9,-	
DC22	2301-000383	C-FILM,PEF;10nF,5%,50V,TP,6x7x3.2mm,5mm	
DC33	2301-000383	C-FILM,PEF;10nF,5%,50V,TP,6x7x3.2mm,5mm	
OC3	2301-000383	C-FILM,PEF;10nF,5%,50V,TP,6x7x3.2mm,5mm	
DC18	2301-000390	C-FILM,PEF;15NF,10%,50V,TP,6.5X9X3.5MM,5M	
DC23	2301-000390	C-FILM,PEF;15NF,10%,50V,TP,6.5X9X3.5MM,5M	
DC35	2301-000390	C-FILM,PEF;15NF,10%,50V,TP,6.5X9X3.5MM,5M	

Location no.	Code no.	Description & Specification	Remarks
DC34	2301-000396	C-FILM,PEF;18NF,5%,50V,TP,7X12X4,4MM	
DC8	2301-000396	C-FILM,PEF;18NF,5%,50V,TP,7X12X4,4MM	
DC4	2301-000401	C-FILM,PEF;1NF,5%,50V,TP,5.5X12X3.3MM	
DC44	2301-000401	C-FILM,PEF;1NF,5%,50V,TP,5.5X12X3.3MM	
DC56	2301-000404	C-FILM,PEF;2.2NF,10%,50V,TP,5.5X7X3.2MM,5	
-	2301-000412	C-FILM,PEF;22NF,10%,50V,TP,6.5X10.5X4MM,5	
FC13	2301-000412	C-FILM,PEF;22NF,10%,50V,TP,6.5X10.5X4MM,5	
	2301-000419	C-FILM,PEF;27NF,10%,50V,TP,7.5X10.5X4MM,5	
DC17	2301-000428	C-FILM,PEF;3.9nF,5%,50V,TP,5.5x12x3,3mm	
DC50	2301-000428	C-FILM,PEF;3.9nF,5%,50V,TP,5.5x12x3,3mm	
DC25	2301-000446	C-FILM,PEF;4.7NF,5%,50V,TP,6X12X3,3.5MM	
PC23	2301-000449	C-FILM,PEF;47NF,10%,50V,TP,8X11X4.5MM,5MM	
FC38	2301-000459	C-FILM,PEF;56NF,5%,50V,TP,9.5X12.5X5,6.5M	
FC39	2301-000459	C-FILM,PEF;56NF,5%,50V,TP,9.5X12.5X5,6.5M	
DC37	2301-000475	C-FILM,PEF;8.2nF,5%,50V,TP,6.5x12x3.5,3.5	
DC5	2301-000475	C-FILM,PEF;8.2nF,5%,50V,TP,6.5x12x3.5,3.5	
AC11	2303-000311	C-FILM,PPF;100NF,5%,100V,TP,10X13.5X4,5MM	
AC8	2303-000311	C-FILM,PPF;100NF,5%,100V,TP,10X13.5X4,5MM	
DC12	2303-000311	C-FILM,PPF;100NF,5%,100V,TP,10X13.5X4,5MM	
DC38	2303-000311	C-FILM,PPF;100NF,5%,100V,TP,10X13.5X4,5MM	
FC22	2303-000311	C-FILM,PPF;100NF,5%,100V,TP,10X13.5X4,5MM	
FC23	2303-000311	C-FILM,PPF;100NF,5%,100V,TP,10X13.5X4,5MM	
FC34	2303-000311	C-FILM,PPF;100NF,5%,100V,TP,10X13.5X4,5MM	
FC35	2303-000311	C-FILM,PPF;100NF,5%,100V,TP,10X13.5X4,5MM	
FC36	2303-000311	C-FILM,PPF;100NF,5%,100V,TP,10X13.5X4,5MM	
FC37	2303-000311	C-FILM,PPF;100NF,5%,100V,TP,10X13.5X4,5MM	
PC11	2303-000311	C-FILM,PPF;100NF,5%,100V,TP,10X13.5X4,5MM	
PC12	2303-000311	C-FILM,PPF;100NF,5%,100V,TP,10X13.5X4,5MM	
PC13	2303-000311	C-FILM,PPF;100NF,5%,100V,TP,10X13.5X4,5MM	
PC3	2401-000230	C-AL;100uF,20%,100V,GP,TP,12.5x20,5	
DC2	2401-000240	C-AL;100uF,20%,10V,GP,TP,5x11,5	
DC36	2401-000240	C-AL;100uF,20%,10V,GP,TP,5x11,5	
AC28	2401-000303	C-AL;100uF,20%,25V,GP,TP,6.3x11,5	
AC14	2401-000357	C-AL;100UF,20%,50V,GP,-,8X11.5,3.5M	
AC18	2401-000357	C-AL;100UF,20%,50V,GP,-,8X11.5,3.5M	
AC6	2401-000357	C-AL;100UF,20%,50V,GP,-,8X11.5,3.5M	
PC4	2401-000357	C-AL;100UF,20%,50V,GP,-,8X11.5,3.5M	
FC40	2401-000438	C-AL;10UF,20%,25V,GP,-,5X11,2MM	
PC6	2401-000475	C-AL;10UF,20%,50V,GP,-,5X11,2MM	
DC51	2401-000795	C-AL;220UF,20%,16V,GP,-,8X11.5,3.5M	
PC15	2401-000795	C-AL;220UF,20%,16V,GP,-,8X11.5,3.5M	
PC18	2401-000830	C-AL;220uF,20%,25V,GP,TP,8x11.5,5	
DC13	2401-001019	C-AL;3.3UF,20%,50V,GP,-,5X7,1.5MM	
DC16	2401-001019	C-AL;3.3UF,20%,50V,GP,-,5X7,1.5MM	
DC32	2401-001019	C-AL;3.3UF,20%,50V,GP,-,5X7,1.5MM	
DC41	2401-001019	C-AL;3.3UF,20%,50V,GP,-,5X7,1.5MM	
DC47	2401-001019	C-AL;3.3UF,20%,50V,GP,-,5X7,1.5MM	
DC7	2401-001019	C-AL;3.3UF,20%,50V,GP,-,5X7,1.5MM	
DC1	2401-001080	C-AL;330nF,20%,50V,GP,-,5x11,2mm	
DC45	2401-001080	C-AL;330nF,20%,50V,GP,-,5x11,2mm	
-	2401-001538	C-AL;47UF,20%,25V,GP,-,6X11,2.5MM	
DC33	2401-001538	C-AL;47UF,20%,25V,GP,-,6X11,2.5MM	
DC6	2401-001538	C-AL;47UF,20%,25V,GP,-,6X11,2.5MM	
PC16	2401-001538	C-AL;47UF,20%,25V,GP,-,6X11,2.5MM	
PC17	2401-001538	C-AL;47UF,20%,25V,GP,-,6X11,2.5MM	
PC22	2401-001538	C-AL;47UF,20%,25V,GP,-,6X11,2.5MM	
PC24	2401-001538	C-AL;47UF,20%,25V,GP,-,6X11,2.5MM	
PC7	2401-001538	C-AL;47UF,20%,25V,GP,-,6X11,2.5MM	
PC9	2401-001538	C-AL;47UF,20%,25V,GP,-,6X11,2.5MM	
AAC1	2401-001572	C-AL;47UF,20%,50V,GP,-,6.3X11,2.5MM	
AAC3	2401-001572	C-AL;47UF,20%,50V,GP,-,6.3X11,2.5MM	
AC17	2401-001572	C-AL;47UF,20%,50V,GP,-,6.3X11,2.5MM	
AC5	2401-001572	C-AL;47UF,20%,50V,GP,-,6.3X11,2.5MM	
PC10	2401-001572	C-AL;47UF,20%,50V,GP,-,6.3X11,2.5MM	
PC21	2401-001572	C-AL;47UF,20%,50V,GP,-,6.3X11,2.5MM	
AC19	2401-001887	C-AL;100NF,20%,50V,-,TP,4X7MM,5	
AC2	2401-001887	C-AL;100NF,20%,50V,-,TP,4X7MM,5	
DC19	2401-001895	C-AL;100uF,20%,16V,GP,6.3x11mm,2.5m	
DC24	2401-001895	C-AL;100uF,20%,16V,GP,6.3x11mm,2.5m	
AC13	2401-001912	C-AL;1uF,20%,50V,GP,5x11mm,2mm,BK	
AC7	2401-001912	C-AL;1uF,20%,50V,GP,5x11mm,2mm,BK	
DC54	2401-001912	C-AL;1uF,20%,50V,GP,5x11mm,2mm,BK	
DC58	2401-001912	C-AL;1uF,20%,50V,GP,5x11mm,2mm,BK	
FC43	2401-001912	C-AL;1uF,20%,50V,GP,5x11mm,2mm,BK	
PAC1	2401-001912	C-AL;1uF,20%,50V,GP,5x11mm,2mm,BK	
PC5	2401-001912	C-AL;1uF,20%,50V,GP,5x11mm,2mm,BK	
AC15	2401-001938	C-AL;22UF,20%,25V,GP,BK,5X11MM,2MM	
AC3	2401-001938	C-AL;22UF,20%,25V,GP,BK,5X11MM,2MM	
-	2401-001952	C-AL;4.7UF,20%,50V,-,TP,6.3X7,5	
AC1	2401-001952	C-AL;4.7UF,20%,50V,-,TP,6.3X7,5	
AC16	2401-001952	C-AL;4.7UF,20%,50V,-,TP,6.3X7,5	
DC40	2401-001952	C-AL;4.7UF,20%,50V,-,TP,6.3X7,5	
FC2	2401-001952	C-AL;4.7UF,20%,50V,-,TP,6.3X7,5	
FC3	2401-001952	C-AL;4.7UF,20%,50V,-,TP,6.3X7,5	
FC4	2401-001952	C-AL;4.7UF,20%,50V,-,TP,6.3X7,5	
FC41	2401-001952	C-AL;4.7UF,20%,50V,-,TP,6.3X7,5	
FC42	2401-001952	C-AL;4.7UF,20%,50V,-,TP,6.3X7,5	
FC5	2401-001952	C-AL;4.7UF,20%,50V,-,TP,6.3X7,5	
PC14	2401-001952	C-AL;4.7UF,20%,50V,-,TP,6.3X7,5	
DC14	2401-001975	C-AL;47UF,20%,16V,GP,TP,5X11MM,5	
DC43	2401-001975	C-AL;47UF,20%,16V,GP,TP,5X11MM,5	
FC15	2401-001975	C-AL;47UF,20%,16V,GP,TP,5X11MM,5	
FC16	2401-001975	C-AL;47UF,20%,16V,GP,TP,5X11MM,5	

Location no.	Code no.	Description & Specification	Remarks
FC44	2401-001975	C-AL;47UF,20%,16V,GP,TP,5X11MM,5	
PC8	2401-001975	C-AL;47UF,20%,16V,GP,TP,5X11MM,5	
FC20	2401-001989	C-AL;4.7uF,20%,50V,BP,TP,5x11,5	
FC21	2401-001989	C-AL;4.7uF,20%,50V,BP,TP,5x11,5	
DC10	2401-002180	C-AL;2.2UF,20%,50V,GP,TP,5X11,5MM	
DC39	2401-002180	C-AL;2.2UF,20%,50V,GP,TP,5X11,5MM	
DC48	2401-002180	C-AL;2.2UF,20%,50V,GP,TP,5X11,5MM	
DC49	2401-002180	C-AL;2.2UF,20%,50V,GP,TP,5X11,5MM	
FC25	2401-002180	C-AL;2.2UF,20%,50V,GP,TP,5X11,5MM	
FC26	2401-002180	C-AL;2.2UF,20%,50V,GP,TP,5X11,5MM	
FC27	2401-002180	C-AL;2.2UF,20%,50V,GP,TP,5X11,5MM	
FC28	2401-002180	C-AL;2.2UF,20%,50V,GP,TP,5X11,5MM	
FC31	2401-002180	C-AL;2.2UF,20%,50V,GP,TP,5X11,5MM	
FC32	2401-002180	C-AL;2.2UF,20%,50V,GP,TP,5X11,5MM	
PL1	2701-000116	INDUCTOR-AXIAL;10uH,10%,4.2x9.8mm	
DL3	2701-000298	INDUCTOR-AXIAL;470uH,10%,4.2x9.8mm	
PL4	2701-000298	INDUCTOR-AXIAL;470uH,10%,4.2x9.8mm	
RF1	3602-000147	FUSE-CLIP;250V,7.5A,30MOHM	
RF2	3602-000147	FUSE-CLIP;250V,7.5A,30MOHM	
PQ12	AC14-12001G	IC;KA78L05,T,-	
PBD1	0402-001258	DIODE-BRIDGE;GBU606,600V,6A,SIP-4,BK	
AQ17	0502-000303	TR-POWER;KSD882,NPN,1W,TO-126,TP,160-32	
AQ18	0502-000303	TR-POWER;KSD882,NPN,1W,TO-126,TP,160-32	
PQ7	0502-000407	TR-POWER;KTC4369Y,NPN,15W,TO-220,BK,120	
AQ11	0503-001013	TR-DARLINGTON;2SD2494,NPN,60W,T0-3P,BK,5	
AQ9	0503-001013	TR-DARLINGTON;2SD2494,NPN,60W,T0-3P,BK,5	
PQ1	0503-001013	TR-DARLINGTON;2SD2494,NPN,60W,T0-3P,BK,5	
	0503-001014	TR-DARLINGTON;2SD2495,NPN,60W,T0-3P,BK,5	
AQ10	0503-001015	TR-DARLINGTON;2SB1625,60W,TO-3P,BK,5000-	
AQ8	0503-001015	TR-DARLINGTON;2SB1625,60W,TO-3P,BK,5000-	
DIC1	1201-000358	IC-PREAMP;22291,DIP,24P,-,DUAL,-,PLASTIC	
FIC4	1204-001465	IC-VOLUME/TONE CONT.;TDA7440D,SOP,28,18.	
AR1	2003-000390	R-METAL OXIDE(S);0.27OHM,5%,2W,AA,TP,4X12MM	
AR2	2003-000390	R-METAL OXIDE(S);0.27OHM,5%,2W,AA,TP,4X12MM	
AR24	2003-000390	R-METAL OXIDE(S);0.27OHM,5%,2W,AA,TP,4X12MM	
AR25	2003-000390	R-METAL OXIDE(S);0.27OHM,5%,2W,AA,TP,4X12MM	
PR31	2003-000690	R-METAL OXIDE(S);4.7ohm,5%,2W,AA,TP,4x12mm	
PR32	2003-000690	R-METAL OXIDE(S);4.7ohm,5%,2W,AA,TP,4x12mm	
PC1	2401-002258	C-AL;4700UF,20%,50V,GP,BK,22X40MM,5	
PC2	2401-002258	C-AL;4700UF,20%,50V,GP,BK,22X40MM,5	
	3601-000170	FUSE-FERRULE;250V,1.6A,TL,GLASS,5x20mm	
ACW1	3711-000820	CONNECTOR-HEADER;BOX,2P,1R,2.5mm,STRAIGHT,SN	
FCW1	3711-002809	CONNECTOR-HEADER;BOX,8P,1R,2mm,STRAIGHT,SN	
CCW2	3711-003097	CONNECTOR-HEADER;NOWALL,10P,1R,1.25MM,ANGLE,SN	
CCW1	3711-003104	CONNECTOR-HEADER;NOWALL,22P,1R,1.25MM,ANGLE,SN	
DCW1	3711-003107	CONNECTOR-HEADER;BOX,3P,1R,2.5mm,STRAIGHT,SN	
DCW4	3711-003107	CONNECTOR-HEADER;BOX,3P,1R,2.5mm,STRAIGHT,SN	
DCW2	3711-003111	CONNECTOR-HEADER;BOX,6P,1R,2.5mm,-,BRAS	
PCW2	3711-003111	CONNECTOR-HEADER;BOX,6P,1R,2.5mm,-,BRAS	
FCW2	3711-004109	CONNECTOR-HEADER;3WALL,14P,1R,2mm,STRAIGHT,SN	
AJACK1	3716-000209	TERMINAL-BLOCK;,-,-,60V,7A	
HJACK1	3722-000363	JACK-PHONE;9P,6.4MM,AU,BLK,-	
AJACK2	3722-000377	JACK-RCA;4P/2C,3.5MM,SN,BLK,#16~22	
FJACK	3722-000377	JACK-RCA;4P/2C,3.5MM,SN,BLK,#16~22	
DL4	AH26-10002G	TRANS-IF;IODT-N5002,BIAS-OSC,3.7MH,7.6X12.0,L6/10	
DL1	AH26-10002Y	COIL-TRAP;FB875-85A,BIAS-TRAP,35DB,8.0,180PF,85KHZ	
DL2	AH26-10002Y	COIL-TRAP;FB875-85A,BIAS-TRAP,35DB,8.0,180PF,85KHZ	
P/T	AH26-80144L	TRANS-POWER;EI74X52,115/230V,60/50HZ,MAX940	
RL1	AH27-10001F	COIL-CHOKE;27UH,K,Q30,-,-,DR(6.5*7.5),-,-,	
RL2	AH27-10001F	COIL-CHOKE;27UH,K,Q30,-,-,DR(6.5*7.5),-,-,	
FAN	AH31-10020A	FAN-DC;D0620B-12M,12VDC/0.16A,	
	AH94-00010B	**ASS'Y-MAIN CE OPT;MAX940/930**	**S.N.A.**
AAC2	2201-000205	C-CERAMIC,DISC;10PF,5%,50V,RH,TP,5X3,5	
AAC4	2201-000205	C-CERAMIC,DISC;10PF,5%,50V,RH,TP,5X3,5	
FAC1	2202-000231	C-CERAMIC,MLC-AXIAL;330pF,10%,50V,Y5P,TP,3.5x19,-	
FAC2	2202-000231	C-CERAMIC,MLC-AXIAL;330pF,10%,50V,Y5P,TP,3.5x19,-	
-	2202-000781	C-CERAMIC,MLC-AXIAL;100pF,10%,50V,Y5P,TP;100PF,10%,50V,Y5P,TP,3.5X19,-	
DIPPING	2202-000781	C-CERAMIC,MLC-AXIAL;100pF,10%,50V,Y5P,TP;100PF,10%,50V,Y5P,TP,3.5X19,-	
AC10	2301-000446	C-FILM,PEF;4.7NF,5%,50V,TP,6X12X3,3.5MM	
AC9	2301-000446	C-FILM,PEF;4.7NF,5%,50V,TP,6X12X3,3.5MM	
FAC3	2301-000449	C-FILM,PEF;47NF,10%,50V,TP,8X11X4.5MM,5MM	
AAL1	AH27-90001B	COIL-SPRING;,2.2UH,-,-,SPRING	
AAL2	AH27-90001B	COIL-SPRING;,2.2UH,-,-,SPRING	
AL1	AH27-90001B	COIL-SPRING;,2.2UH,-,-,SPRING	
AL2	AH27-90001B	COIL-SPRING;,2.2UH,-,-,SPRING	
GND	AH39-50001L	LEAD-FASTEN;RING,1007#24,200MM,BLK	
	AH94-00010C	**ASS'Y-RDS NO MIC;NAX940/930**	**S.N.A.**
OC1	2201-000381	C-CERAMIC,DISC;22NF,20%,50V,Y5V,8.0x4.0mm,5mm,TP	
OC3	2201-000483	C-CERAMIC,DISC;33pF,5%,50V,CH,TP,5x3,5	
OC2	2401-000240	C-AL;100uF,20%,10V,GP,TP,5x11,5	
OF1	2901-001139	FILTER-EMI ON BOARD;50V,.5A,-,390PF,7X2.5X5MM,TP,RADIAL	
BEAD1	3301-000297	CORE-FERRITE BEAD;AA,3.6X1.2X5.7MM,1400,2900G	
OJACK1	3707-001005	CONNECTER-OPTICAL;PLUG,SM,-,4.4/2.0MM	
OCW1	3711-000907	CONNECTOR-HEADER;BOX,3P,1R,2mm,STRAIGHT,SN	
OIC1	AH14-10004R	IC;M74HCU04,SOP,TAPE 14P	
RDS	AH39-00023A	LEAD CONNECTOR-ASSY;-,51004-03,51004-03,03P,300MM,2547#28	
	AH94-00016B	**ASS'Y-FRT RDS NO MIC;MAX940/930**	**S.N.A.**
	2001-000290	R-CARBON;10KOHM,5%,1/8W,AA,TP,-	
	2001-000429	R-CARBON;1KOHM,5%,1/8W,AA,TP,-	
	2001-000734	R-CARBON;4.7KOHM,5%,1/8W,AA,TP,-	
	AH59-00004A	REMOCON—ASSY;-,-,-,22KEY,MAX940,-	
	G3V1	**RADIO CD PLATER;**	
	AH91-00001B	CMS300,OPTION G3VI;G3VI OPTION	
	AH92-00005A	**ASSY-PCB-CD MAIN;G3VI,CD PACK**	**S.N.A.**
NQ1502	0501-000314	TR-SMALL SIGNAL;KSA812,PNP,150MW,SOT-23,TP,90-	
NIC928	0904-001159	IC-DSP;9286,8BIT,QFP,80P,-,1MHZ,TR,CM	
NIC925	1003-000179	IC-MOTOR DRIVER;KA9258D,SOP,28P,-,SINGLE,-,ST,	
NIC922	1204-001286	IC-ASP;KB9223,QFP,80P,-,PLASTIC,6V,20	
NR109	2007-000282	R-CHIP;100KOHM,5%,1/10W,DA,TP,2012	
NR203	2007-000282	R-CHIP;100KOHM,5%,1/10W,DA,TP,2012	
NR300	2007-000282	R-CHIP;100KOHM,5%,1/10W,DA,TP,2012	
NR57L	2007-000282	R-CHIP;100KOHM,5%,1/10W,DA,TP,2012	
NR57R	2007-000282	R-CHIP;100KOHM,5%,1/10W,DA,TP,2012	
NR606	2007-000282	R-CHIP;100KOHM,5%,1/10W,DA,TP,2012	
NR602	2007-000300	R-CHIP;10KOHM,5%,1/10W,DA,TP,2012	
NR603	2007-000300	R-CHIP;10KOHM,5%,1/10W,DA,TP,2012	
NR104	2007-000338	R-CHIP;120KOHM,5%,1/10W,DA,TP,2012	
NR107	2007-000338	R-CHIP;120KOHM,5%,1/10W,DA,TP,2012	
NR100	2007-000355	R-CHIP;12KOHM,5%,1/10W,DA,TP,2012	
NR120	2007-000355	R-CHIP;12KOHM,5%,1/10W,DA,TP,2012	
NR121	2007-000355	R-CHIP;12KOHM,5%,1/10W,DA,TP,2012	
NR204	2007-000355	R-CHIP;12KOHM,5%,1/10W,DA,TP,2012	
FREE	2007-000395	R-CHIP;150KOHM,5%,1/10W,DA,TP,2012	
NR103	2007-000395	R-CHIP;150KOHM,5%,1/10W,DA,TP,2012	
NR119	2007-000395	R-CHIP;150KOHM,5%,1/10W,DA,TP,2012	
NR400	2007-000409	R-CHIP;15KOHM,5%,1/10W,DA,TP,2012	
NR115	2007-000444	R-CHIP;180KOHM,5%,1/10W,DA,TP,2012	
NR10	2007-000468	R-CHIP;1KOHM,5%,1/10W,DA,TP,2012	
NR11	2007-000468	R-CHIP;1KOHM,5%,1/10W,DA,TP,2012	
NR12	2007-000468	R-CHIP;1KOHM,5%,1/10W,DA,TP,2012	
NR4	2007-000468	R-CHIP;1KOHM,5%,1/10W,DA,TP,2012	
NR5	2007-000468	R-CHIP;1KOHM,5%,1/10W,DA,TP,2012	
NR54L	2007-000468	R-CHIP;1KOHM,5%,1/10W,DA,TP,2012	
NR54R	2007-000468	R-CHIP;1KOHM,5%,1/10W,DA,TP,2012	
NR6	2007-000468	R-CHIP;1KOHM,5%,1/10W,DA,TP,2012	
NR604	2007-000468	R-CHIP;1KOHM,5%,1/10W,DA,TP,2012	
NR7	2007-000468	R-CHIP;1KOHM,5%,1/10W,DA,TP,2012	
NR8	2007-000468	R-CHIP;1KOHM,5%,1/10W,DA,TP,2012	
NR804	2007-000468	R-CHIP;1KOHM,5%,1/10W,DA,TP,2012	
SR3	2007-000468	R-CHIP;1KOHM,5%,1/10W,DA,TP,2012	
SR4	2007-000468	R-CHIP;1KOHM,5%,1/10W,DA,TP,2012	
NR114	2007-000477	R-CHIP;1MOHM,5%,1/10W,DA,TP,2012	
NR50L	2007-000586	R-CHIP;22KOHM,5%,1/10W,DA,TP,2012	
NR50R	2007-000586	R-CHIP;22KOHM,5%,1/10W,DA,TP,2012	
NR101	2007-000593	R-CHIP;22OHM,5%,1/10W,DA,TP,2012	
NR200	2007-000653	R-CHIP;27KOHM,5%,1/10W,DA,TP,2012	
NR52L	2007-000653	R-CHIP;27KOHM,5%,1/10W,DA,TP,2012	
NR52R	2007-000653	R-CHIP;27KOHM,5%,1/10W,DA,TP,2012	
NR201	2007-000686	R-CHIP;3.3KOHM,5%,1/10W,DA,TP,2012	
NR202	2007-000686	R-CHIP;3.3KOHM,5%,1/10W,DA,TP,2012	
NR105	2007-000830	R-CHIP;39KOHM,5%,1/10W,DA,TP,2012	
NR995	2007-000830	R-CHIP;39KOHM,5%,1/10W,DA,TP,2012	
NR996	2007-000830	R-CHIP;39KOHM,5%,1/10W,DA,TP,2012	
NR997	2007-000830	R-CHIP;39KOHM,5%,1/10W,DA,TP,2012	
NR998	2007-000830	R-CHIP;39KOHM,5%,1/10W,DA,TP,2012	
NR53L	2007-000872	R-CHIP;4.7KOHM,5%,1/10W,DA,TP,2012	
NR53R	2007-000872	R-CHIP;4.7KOHM,5%,1/10W,DA,TP,2012	
NR55L	2007-000872	R-CHIP;4.7KOHM,5%,1/10W,DA,TP,2012	
NR55R	2007-000872	R-CHIP;4.7KOHM,5%,1/10W,DA,TP,2012	
SR2	2007-000872	R-CHIP;4.7KOHM,5%,1/10W,DA,TP,2012	
NR117	2007-000898	R-CHIP;430Kohm,5%,1/10W,DA,TP,2012	
NR108	2007-000941	R-CHIP;47KOHM,5%,1/10W,DA,TP,2012	
NR111	2007-000941	R-CHIP;47KOHM,5%,1/10W,DA,TP,2012	
NR112	2007-001039	R-CHIP;56KOHM,5%,1/10W,DA,TP,2012	
NR116	2007-001195	R-CHIP;820KOHM,5%,1/10W,DA,TP,2012	
NR994	2007-001208	R-CHIP;82KOHM,5%,1/10W,DA,TP,2012	
NR999	2007-001208	R-CHIP;82KOHM,5%,1/10W,DA,TP,2012	
	2007-001216	R-CHIP;82OHM,5%,1/10W,DA,TP,2012	
NC107	2203-000199	C-CERAMIC,CHIP;100nF,79.8,50V,Z5U,TP,2012,-	
NC108	2203-000199	C-CERAMIC,CHIP;100nF,79.8,50V,Z5U,TP,2012,-	
NC119	2203-000199	C-CERAMIC,CHIP;100nF,79.8,50V,Z5U,TP,2012,-	
NC120	2203-000199	C-CERAMIC,CHIP;100nF,79.8,50V,Z5U,TP,2012,-	
NC121	2203-000199	C-CERAMIC,CHIP;100nF,79.8,50V,Z5U,TP,2012,-	
NC600	2203-000199	C-CERAMIC,CHIP;100nF,79.8,50V,Z5U,TP,2012,-	
NC901	2203-000199	C-CERAMIC,CHIP;100nF,79.8,50V,Z5U,TP,2012,-	
NC1	2203-000260	C-CERAMIC,CHIP;10nF,10%,50V,X7R,TP,2012,-	
NC103	2203-000260	C-CERAMIC,CHIP;10nF,10%,50V,X7R,TP,2012,-	
NC112	2203-000260	C-CERAMIC,CHIP;10nF,10%,50V,X7R,TP,2012,-	
NC113	2203-000260	C-CERAMIC,CHIP;10nF,10%,50V,X7R,TP,2012,-	
NC116	2203-000260	C-CERAMIC,CHIP;10nF,10%,50V,X7R,TP,2012,-	
NC205	2203-000260	C-CERAMIC,CHIP;10nF,10%,50V,X7R,TP,2012,-	
NC502	2203-000260	C-CERAMIC,CHIP;10nF,10%,50V,X7R,TP,2012,-	
NC503	2203-000260	C-CERAMIC,CHIP;10nF,10%,50V,X7R,TP,2012,-	
NC504	2203-000260	C-CERAMIC,CHIP;10nF,10%,50V,X7R,TP,2012,-	
NC53L	2203-000260	C-CERAMIC,CHIP;10nF,10%,50V,X7R,TP,2012,-	
NC53R	2203-000260	C-CERAMIC,CHIP;10nF,10%,50V,X7R,TP,2012,-	
NC602	2203-000260	C-CERAMIC,CHIP;10nF,10%,50V,X7R,TP,2012,-	
NC800	2203-000260	C-CERAMIC,CHIP;10nF,10%,50V,X7R,TP,2012,-	
NC804	2203-000260	C-CERAMIC,CHIP;10nF,10%,50V,X7R,TP,2012,-	
NC905	2203-000260	C-CERAMIC,CHIP;10nF,10%,50V,X7R,TP,2012,-	
SC1	2203-000260	C-CERAMIC,CHIP;10nF,10%,50V,X7R,TP,2012,-	

Location no.	Code no.	Description & Specification	Remarks
SC2	2203-000260	C-CERAMIC,CHIP;10nF,10%,50V,X7R,TP,2012,-	
SC6	2203-000260	C-CERAMIC,CHIP;10nF,10%,50V,X7R,TP,2012,-	
NC190	2203-000335	C-CERAMIC,CHIP;12pF,5%,50V,NPO,TP,2012,2.0m	
NC117	2203-000477	C-CERAMIC,CHIP;1uF,+80-20%,16V,Y5V,TP,2012,-	
NC110	2203-000495	C-CERAMIC,CHIP;2.2nF,10%,50V,X7R,2012,-,TP	
NC118	2203-000787	C-CERAMIC,CHIP;330pF,5%,50V,NPO,TP,2012,-	
NC101	2203-000802	C-CERAMIC,CHIP;33nF,10%,50V,X7R,TP,2012,-	
NC111	2203-000802	C-CERAMIC,CHIP;33nF,10%,50V,X7R,TP,2012,-	
NC125	2203-000802	C-CERAMIC,CHIP;33nF,10%,50V,X7R,TP,2012,-	
NC100	2203-000892	C-CERAMIC,CHIP;4.7NF,10%,50V,X7R,TP,2012,-	
NC106	2203-000892	C-CERAMIC,CHIP;4.7NF,10%,50V,X7R,TP,2012,-	
NC124	2203-000919	C-CERAMIC,CHIP;470nF,+80-20%,16V,Y5V,TP,2012,	
NC204	2203-000919	C-CERAMIC,CHIP;470nF,+80-20%,16V,Y5V,TP,2012,	
NC200	2203-000979	C-CERAMIC,CHIP;47nF,10%,50V,X7R,TP,2012,-	
NC115	2203-001137	C-CERAMIC,CHIP;68nF,+80-20%,50V,Y5V,TP,2012,-	
NC104	2203-001537	C-CERAMIC,CHIP;1NF,10%,50V,X7R,TP,2012,-	
NC52L	2203-001537	C-CERAMIC,CHIP;1NF,10%,50V,X7R,TP,2012,-	
NC52R	2203-001537	C-CERAMIC,CHIP;1NF,10%,50V,X7R,TP,2012,-	
NC603	2203-001537	C-CERAMIC,CHIP;1NF,10%,50V,X7R,TP,2012,-	
NC903	2203-001537	C-CERAMIC,CHIP;1NF,10%,50V,X7R,TP,2012,-	
NC102	2203-001551	C-CERAMIC,CHIP;1.5NF,10%,50V,X7R,TP,2012,2MM	
NC201	2203-001551	C-CERAMIC,CHIP;1.5NF,10%,50V,X7R,TP,2012,2MM	
NC202	2203-001619	C-CERAMIC,CHIP;27PF,5%,50V,NPO,TP,2012,2MM	
NC203	2203-001619	C-CERAMIC,CHIP;27PF,5%,50V,NPO,TP,2012,2MM	
NL105	3301-000325	CORE-FERRITE BEAD;AB,3.2x2.5x1.3mm,-,-	
SIC1	1003-001162	IC-MOTOR DRIVER;KA3082,SIP,10PIN,25MIL,DOUBLE,	
SIC2	1003-001162	IC-MOTOR DRIVER;KA3082,SIP,10PIN,25MIL,DOUBLE,	
NXF100	2802-000211	RESONATOR-CERAMIC;16.93MHZ,0.5%,TP,10.0X5.0X10.0	
SCW5	3708-001131	CONNECTOR-FPC/FC/PIC;5P,1.25mm,STRAIGHT,SN	
NCW100	3708-001312	CONNECTOR-FPC/FC/PIC;16P,1mm,STRAIGHT,SN	
	3711-000906	CONNECTOR-HEADER;BOX,3P,1R,2mm,ANGLE,SN	
SCW1	3711-002579	CONNECTOR-HEADER;WALL,22P,1R,2.5MM,ANGLE,	
SCW7	3711-003379	CONNECTOR-HEADER;NOWALL,3P,1R,2.5MM,STRAIGHT,SN	
NCW101	AH39-20025S	LEAD-CONNECTOR,ASSY;-,51004-08,35023-08,8P,300MM,1	
NCW102	AH39-20561P	LEAD CONNECTOR-ASSY;-,5295,PHR,6P,150mm,1007#28	
ND200	0401-000101	DIODE-SWITCHING;1N4148,100V,200mA,DO-35,TP	
ND201	0401-000101	DIODE-SWITCHING;1N4148,100V,200mA,DO-35,TP	
ND202	0401-000101	DIODE-SWITCHING;1N4148,100V,200mA,DO-35,TP	
ND203	0401-000101	DIODE-SWITCHING;1N4148,100V,200mA,DO-35,TP	
SZD1	0403-000352	DIODE-ZENER;UZ4.7BM,4.7V,4.4-5.0V,500MW,DO	
SZD2	0403-000361	DIODE-ZENER;UZ6.2BSB,6.2V,5.99-6.24V,50	
NQ1501	0501-000610	TR-SMALL SIGNAL;KSA928A-Y,PNP,1W,TO-92L,TP,160	
SR1	2001-000027	R-CARBON;100ohm,5%,1/4W,AA,TP,2.4x6.4mm	
NR106	2001-000319	R-CARBON;120Kohm,5%,1/8W,AA,TP,1.8x3.2m	
NR1	2001-000429	R-CARBON;1KOHM,5%,1/8W,AA,TP,-	
NR2	2001-000429	R-CARBON;1KOHM,5%,1/8W,AA,TP,-	
NR3	2001-000429	R-CARBON;1KOHM,5%,1/8W,AA,TP,-	
NR113	2001-000977	R-CARBON;8.2Kohm,5%,1/8W,AA,TP,1.8x3.2m	
NR555	2008-000141	R-FUSIBLE;2.2ohm,5%,1/4W,AA,TP,2.6x6.7mm	
NC400	2202-000243	C-CERAMIC,MLC-AXIAL;33PF,5%,50V,SL,3.5X19,-,TP	
NC300	2202-000796	C-CERAMIC,MLC-AXIAL;1nF,10%,50V,Y5P,TP,3.5x19,-	
NC117	2301-000389	C-FILM,PEF;150nF,5%,50V,TP,12.5x15x7.5,7m	
NC105	2401-000240	C-AL;100uF,20%,10V,GP,TP,5x11,5	
NC501	2401-000240	C-AL;100uF,20%,10V,GP,TP,5x11,5	
NC702	2401-000240	C-AL;100uF,20%,10V,GP,TP,5x11,5	
NC904	2401-000240	C-AL;100uF,20%,10V,GP,TP,5x11,5	
SC14	2401-000240	C-AL;100uF,20%,10V,GP,TP,5x11,5	
NC114	2401-000419	C-AL;10UF,20%,16V,GP,-,4X7,5	
NC301	2401-000778	C-AL;220uF,20%,10V,GP,6.3x11,2.5mm,	
NC700	2401-000778	C-AL;220uF,20%,10V,GP,6.3x11,2.5mm,	
NC701	2401-000778	C-AL;220uF,20%,10V,GP,6.3x11,2.5mm,	
SC5	2401-000795	C-AL;220UF,20%,16V,GP,-,8X11.5,3.5M	
NC703	2401-001102	C-AL;330UF,20%,16V,GP,TP,8X12,5	
NC122	2401-001952	C-AL;4.7UF,20%,50V,-,TP,6.3X7,5	
NC50L	2401-001952	C-AL;4.7UF,20%,50V,-,TP,6.3X7,5	
NC50R	2401-001952	C-AL;4.7UF,20%,50V,-,TP,6.3X7,5	
NC54	2401-001952	C-AL;4.7UF,20%,50V,-,TP,6.3X7,5	
NC55L	2401-001952	C-AL;4.7UF,20%,50V,-,TP,6.3X7,5	
NC55R	2401-001952	C-AL;4.7UF,20%,50V,-,TP,6.3X7,5	
NL101	2701-000111	INDUCTOR-AXIAL;100uH,10%,2.5x3.4mm	
NL102	2701-000111	INDUCTOR-AXIAL;100uH,10%,2.5x3.4mm	
NL100	2701-000114	INDUCTOR-AXIAL;10uH,10%,2.5x3.4mm	
SL1	2701-000179	INDUCTOR-AXIAL;33uH,10%,4.2x9.8mm	
NL300	3301-000297	CORE-FERRITE BEAD;AA,3.6X1.2X5.7MM,1400,2900G	
NL301	3301-000297	CORE-FERRITE BEAD;AA,3.6X1.2X5.7MM,1400,2900G	
NL302	3301-000297	CORE-FERRITE BEAD;AA,3.6X1.2X5.7MM,1400,2900G	
NIC05	AC14-12001G	IC;KA78L05,T,-	
SCO4	AC14-12001G	IC;KA78L05,T,-	
	AJ59-20150T	DECK-CDP;CMS-300,-,-,-,-	
	PS940E/NSI	SPEAKER-SYSTEM;MAX940	

**** MAX938/939/940/941 Parts List ****

AH90-10752Y ASSY-PCB-TUNER;MAX900,CE+RDS BAND S.N.A.

Location no.	Code no.	Description & Specification	Remarks
TFL4	14529-304-610	FILTER CERAMIC;AHCM2-450BL	
TX1	2801-000734	CRYSTAL-UNIT;7.2MHZ,50PPM,28-AAM,12PF,30OHM	
TFL2	2903-000105	FILTER-CERAMIC;BP,10.7MHZ+-25KHZ,180KHZ+-50KH	
TWA1	3710-001421	CONNECTOR-SOCKET;14P,1R,2mm,ANGLE,SN	
TJ2	3711-000814	CONNECTOR-HEADER;BOX,2P,1R,2.5mm,ANGLE,SN	
HIC1	AH14-10007G	IC;LC72131,DIP,STICK PLL	
TIC1	AH14-10008B	IC;LA1837,DIP,RF+MPX	
TLPF1	AH26-00005A	TRANS-IF;-,LKS75M00-X000264-0,LOW PASS FILTER,-,7	
TLPF2	AH26-00005A	TRANS-IF;-,LKS75M00-X000264-0,LOW PASS FILTER,-,7	
TL2	AH26-10001E	TRANS-IF;KS940228-09,-,-,7.6X12.0,-,450KHZ,BULK,	
TL3	AH26-10020A	TRANS-DET;-,7KLL,DET,-,7.8MM,91PF,11.32M	
TC39	AH61-40022A	STUD-TAP;SPC1,T0.5,BT2,-,-,	
RZD1	0403-000393	DIODE-ZENER;UZP5.1B,5.1V,4.8-5.4V,1W,DO-41	
RR1	2001-000118	R-CARBON(S);180ohm,5%,1/2W,AA,TP,2.4x6.4mm	
RR3	2001-000429	R-CARBON;1KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
RR4	2001-000429	R-CARBON;1KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
RR5	2001-000429	R-CARBON;1KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
RR2	2007-000290	R-CHIP;100OHM,5%,1/10W,DA,TP,2012	
TR24	2007-000290	R-CHIP;100OHM,5%,1/10W,DA,TP,2012	
TR43	2007-000290	R-CHIP;100OHM,5%,1/10W,DA,TP,2012	
RC9	2202-000796	C-CERAMIC,MLC-AXIAL;1nF,10%,50V,Y5P,TP,3.5x19,-	
RC2	2203-000260	C-CERAMIC,CHIP;10nF,10%,50V,X7R,TP,2012,-	
TC20	2203-000260	C-CERAMIC,CHIP;10nF,10%,50V,X7R,TP,2012,-	
TC3	2203-000260	C-CERAMIC,CHIP;10nF,10%,50V,X7R,TP,2012,-	
RC7	2203-000979	C-CERAMIC,CHIP;47nF,10%,50V,X7R,TP,2012,-	
RC8	2203-001058	C-CERAMIC,CHIP;560pF,5%,50V,NPO,2012,-,TP	
RC4	2203-001524	C-CERAMIC,CHIP;47pF,5%,50V,NPO,TP,2012,-	
RC5	2203-001524	C-CERAMIC,CHIP;47pF,5%,50V,NPO,TP,2012,-	
RC1	2401-000907	C-AL;22UF,20%,16V,GP,-,5X11,2MM	
RC6	2401-002180	C-AL;2.2UF,20%,50V,GP,TP,5X11,5MM	
RX1	2801-003601	CRYSTAL-UNIT;4.332MHz,30ppm,28-AAM,30pF,	
RIC1	AH14-10008E	IC;BU1923F,SOP,+5V	
TR6	2007-000030	R-CHIP;560OHM,5%,1/10W,DA,TP,2012	
TR19	2007-000282	R-CHIP;100KOHM,5%,1/10W,DA,TP,2012	
TR45	2007-000282	R-CHIP;100KOHM,5%,1/10W,DA,TP,2012	
TR47	2007-000282	R-CHIP;100KOHM,5%,1/10W,DA,TP,2012	
TR49	2007-000282	R-CHIP;100KOHM,5%,1/10W,DA,TP,2012	
TR24	2007-000290	R-CHIP;100OHM,5%,1/10W,DA,TP,2012	
TR43	2007-000290	R-CHIP;100OHM,5%,1/10W,DA,TP,2012	
TR21	2007-000300	R-CHIP;10KOHM,5%,1/10W,DA,TP,2012	
TR22	2007-000300	R-CHIP;10KOHM,5%,1/10W,DA,TP,2012	
TR46	2007-000300	R-CHIP;10KOHM,5%,1/10W,DA,TP,2012	
TR48	2007-000300	R-CHIP;10KOHM,5%,1/10W,DA,TP,2012	
TR50	2007-000300	R-CHIP;10KOHM,5%,1/10W,DA,TP,2012	
TR53	2007-000300	R-CHIP;10KOHM,5%,1/10W,DA,TP,2012	
TR54	2007-000300	R-CHIP;10KOHM,5%,1/10W,DA,TP,2012	
TR56	2007-000300	R-CHIP;10KOHM,5%,1/10W,DA,TP,2012	
TR10	2007-000308	R-CHIP;10OHM,5%,1/10W,DA,TP,2012	
TR20	2007-000409	R-CHIP;15KOHM,5%,1/10W,DA,TP,2012	
TR28	2007-000457	R-CHIP;18KOHM,5%,1/10W,DA,TP,2012	
TR52	2007-000468	R-CHIP;1KOHM,5%,1/10W,DA,TP,2012	
TR9	2007-000468	R-CHIP;1KOHM,5%,1/10W,DA,TP,2012	
TR35	2007-000493	R-CHIP;2.2KOHM,5%,1/10W,DA,TP,2012	
TR36	2007-000493	R-CHIP;2.2KOHM,5%,1/10W,DA,TP,2012	
TR40	2007-000493	R-CHIP;2.2KOHM,5%,1/10W,DA,TP,2012	
TR7	2007-000518	R-CHIP;2.7KOHM,5%,1/10W,DA,TP,2012	
TR11	2007-000572	R-CHIP;220OHM,5%,1/10W,DA,TP,2012	
TR15	2007-000586	R-CHIP;22KOHM,5%,1/10W,DA,TP,2012	
TR12	2007-000686	R-CHIP;3.3KOHM,5%,1/10W,DA,TP,2012	
TR29	2007-000686	R-CHIP;3.3KOHM,5%,1/10W,DA,TP,2012	
TR23	2007-000710	R-CHIP;3.9KOHM,5%,1/10W,DA,TP,2012	
TR8	2007-000822	R-CHIP;390OHM,5%,1/10W,DA,TP,2012	
TR4	2007-000872	R-CHIP;4.7KOHM,5%,1/10W,DA,TP,2012	
TR51	2007-000872	R-CHIP;4.7KOHM,5%,1/10W,DA,TP,2012	
TR17	2007-000981	R-CHIP;5.6KOHM,5%,1/10W,DA,TP,2012	
TR37	2007-000981	R-CHIP;5.6KOHM,5%,1/10W,DA,TP,2012	
TR25	2007-001043	R-CHIP;56OHM,5%,1/10W,DA,TP,2012	
TR27	2007-001071	R-CHIP;6.8KOHM,5%,1/10W,DA,TP,2012	
TR38	2007-001177	R-CHIP;8.2KOHM,5%,1/10W,DA,TP,2012	
TR44	2007-001177	R-CHIP;8.2KOHM,5%,1/10W,DA,TP,2012	
TC48	2202-000807	C-CERAMIC,MLC-AXIAL;22NF,+80-20%,25V,Y5V,TP,3.5X19	
TC41	2203-000239	C-CERAMIC,CHIP;100pF,5%,50V,NPO,TP,2012,-	
TC20	2203-000260	C-CERAMIC,CHIP;10nF,10%,50V,X7R,TP,2012,-	
TC28	2203-000260	C-CERAMIC,CHIP;10nF,10%,50V,X7R,TP,2012,-	
TC29	2203-000260	C-CERAMIC,CHIP;10nF,10%,50V,X7R,TP,2012,-	
TC3	2203-000260	C-CERAMIC,CHIP;10nF,10%,50V,X7R,TP,2012,-	
TC44	2203-000260	C-CERAMIC,CHIP;10nF,10%,50V,X7R,TP,2012,-	
TC7	2203-000429	C-CERAMIC,CHIP;18pF,5%,50V,NPO,TP,2012,-	
TC1	2203-000609	C-CERAMIC,CHIP;22nF,10%,50V,X7R,TP,2012,-	
TC5	2203-000609	C-CERAMIC,CHIP;22nF,10%,50V,X7R,TP,2012,-	
TC33	2203-000844	C-CERAMIC,CHIP;39nF,10%,50V,X7R,TP,2012,-	
TC10	2203-000979	C-CERAMIC,CHIP;47nF,10%,50V,X7R,TP,2012,-	
TC13	2203-000979	C-CERAMIC,CHIP;47nF,10%,50V,X7R,TP,2012,-	
TC15	2203-000979	C-CERAMIC,CHIP;47nF,10%,50V,X7R,TP,2012,-	
TC35	2203-000979	C-CERAMIC,CHIP;47nF,10%,50V,X7R,TP,2012,-	
TC45	2203-000979	C-CERAMIC,CHIP;47nF,10%,50V,X7R,TP,2012,-	

Location no.	Code no.	Description & Specifiation	Remarks
TC6	2203-000979	C-CERAMIC,CHIP;47nF,10%,50V,X7R,TP,2012,-	
TC61	2203-001105	C-CERAMIC,CHIP;6.8nF,10%,50V,X7R,TP,2012,-	
TC62	2203-001105	C-CERAMIC,CHIP;6.8nF,10%,50V,X7R,TP,2012,-	
TC32	2203-001132	C-CERAMIC,CHIP;680pF,5%,50V,NPO,2012,-,TP	
TC2	2203-001517	C-CERAMIC,CHIP;15pF,5%,50V,NPO,TP,2012,-	
TC63	2203-001551	C-CERAMIC,CHIP;1.5NF,10%,50V,X7R,TP,2012,2MM	
TC64	2203-001551	C-CERAMIC,CHIP;1.5NF,10%,50V,X7R,TP,2012,2MM	
TC50	2203-001611	C-CERAMIC,CHIP;22pF,5%,50V,NPO,TP,2012,2mm	
TC51	2203-001611	C-CERAMIC,CHIP;22pF,5%,50V,NPO,TP,2012,2mm	
TD3	0401-000101	DIODE-SWITCHING;1N4148,100V,200mA,DO-35,TP	
TD4	0401-000101	DIODE-SWITCHING;1N4148,100V,200mA,DO-35,TP	
TD5	0401-000101	DIODE-SWITCHING;1N4148,100V,200mA,DO-35,TP	
TD6	0401-000101	DIODE-SWITCHING;1N4148,100V,200mA,DO-35,TP	
TZD1	0403-000367	DIODE-ZENER;UZ7.5BSC,7.5V,7.33-7.64V,500mW	
TZD2	0403-000393	DIODE-ZENER;UZP5.1B,5.1V,4.8-5.4V,1W,DO-41	
TQ4	0501-000294	TR-SMALL SIGNAL;KSA708-Y,PNP,800mW,TO-92,TP,12	
TQ2	0501-000392	TR-SMALL SIGNAL;KSC838-O,NPN,250mW,TO-92,-,70-	
TQ3	0501-000392	TR-SMALL SIGNAL;KSC838-O,NPN,250mW,TO-92,-,70-	
TQ1	0501-000398	TR-SMALL SIGNAL;KSC945,NPN,250mW,TO-92,TP,120-	
TR30	2001-000117	R-CARBON(S);68OHM,5%,1/2W,AA,TP,2.4X6.4MM	
TR44	2001-000118	R-CARBON(S);180ohm,5%,1/2W,AA,TP,2.4x6.4mm	
TR58	2001-000273	R-CARBON;100KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
TR5	2001-000281	R-CARBON;100OHM,5%,1/8W,AA,TP,1.8X3.2MM	
TR39	2001-000290	R-CARBON;10KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
TR57	2001-000290	R-CARBON;10KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
TR1	2001-000331	R-CARBON;12KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
TR55	2001-000429	R-CARBON;1KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
TR18	2001-000449	R-CARBON;2.2KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
TR3	2001-000449	R-CARBON;2.2KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
TR13	2001-000515	R-CARBON;220OHM,5%,1/8W,AA,TP,1.8X3.2MM	
TR40	2001-000522	R-CARBON;22KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
TR41	2001-000522	R-CARBON;22KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
TR16	2001-000527	R-CARBON;22OHM,5%,1/8W,AA,TP,1.8X3.2MM	
TR32	2001-000591	R-CARBON;3.3KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
TR34	2001-000591	R-CARBON;3.3KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
TR61	2001-000591	R-CARBON;3.3KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
TR62	2001-000591	R-CARBON;3.3KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
TR42	2001-000734	R-CARBON;4.7KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
TSR1	2103-000290	VR-SEMI;20Kohm,30%,1/10W,TOP	
TC14	2201-000565	C-CERAMIC,DISC;47nF,20%,50V,Y5V,12.5x4.0mm,5mm,TP	
TC39	2201-000565	C-CERAMIC,DISC;47nF,20%,50V,Y5V,12.5x4.0mm,5mm,TP	
TC40	2202-000796	C-CERAMIC,MLC-AXIAL;1nF,10%,50V,Y5P,TP,3.5x19,-	
TC42	2202-000796	C-CERAMIC,MLC-AXIAL;1nF,10%,50V,Y5P,TP,3.5x19,-	
TC48	2202-000807	C-CERAMIC,MLC-AXIAL;22NF,+80-20%,25V,Y5V,TP,3.5X19	
TC21	2401-000240	C-AL;100uF,20%,10V,GP,TP,5x11,5	
TC46	2401-000240	C-AL;100uF,20%,10V,GP,TP,5x11,5	
TC12	2401-000419	C-AL;10UF,20%,16V,GP,-,4X7,5	
TC26	2401-000419	C-AL;10UF,20%,16V,GP,-,4X7,5	
TC27	2401-000419	C-AL;10UF,20%,16V,GP,-,4X7,5	
TC30	2401-000419	C-AL;10UF,20%,16V,GP,-,4X7,5	
TC34	2401-000907	C-AL;22UF,20%,16V,GP,-,5X11,2MM	
TC36	2401-001022	C-AL;3.3UF,20%,50V,GP,-,5X11,2MM	
TC38	2401-001164	C-AL;33UF,20%,16V,GP,-,5X11,2MM	
TC47	2401-001895	C-AL;100uF,20%,16V,GP,6.3x11mm,2.5m	
TC11	2401-001912	C-AL;1uF,20%,50V,GP,5x11mm,2mm,BK	
TC17	2401-001912	C-AL;1uF,20%,50V,GP,5x11mm,2mm,BK	
TC19	2401-001912	C-AL;1uF,20%,50V,GP,5x11mm,2mm,BK	
TC16	2401-001954	C-AL;4.7UF,20%,50V,GP,BK,5X11MM,5	
TC23	2401-001954	C-AL;4.7UF,20%,50V,GP,BK,5X11MM,5	
TC25	2401-001954	C-AL;4.7UF,20%,50V,GP,BK,5X11MM,5	
TC18	2401-001968	C-AL;470NF,20%,50V,GP,TP,5X11MM,5	
TC43	2401-001968	C-AL;470NF,20%,50V,GP,TP,5X11MM,5	
TC4	2401-001975	C-AL;47UF,20%,16V,GP,TP,5X11MM,5	
TC9	2401-001975	C-AL;47UF,20%,16V,GP,TP,5X11MM,5	
	AH94-10015R	**ASSY-PCB,CD,MANU;CMS55HK/E,**	**S.N.A.**
VVC1	0405-000137	DIODE-VARACTOR;KV-1260,20V,100NA,T0-92S	
TQ5	0501-000398	TR-SMALL SIGNAL;KSC945,NPN,250mW,TO-92,TP,120-	
TQ6	0501-000398	TR-SMALL SIGNAL;KSC945,NPN,250mW,TO-92,TP,120-	
TQ7	0501-000398	TR-SMALL SIGNAL;KSC945,NPN,250mW,TO-92,TP,120-	
TR1	2001-000331	R-CARBON;12KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
TR40	2001-000522	R-CARBON;22KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
TR41	2001-000522	R-CARBON;22KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
TR2	2007-000300	R-CHIP;10KOHM,5%,1/10W,DA,TP,2012	
	2202-000263	C-CERAMIC,MLC-AXIAL;470pF,10%,50V,Y5P,TP,3.5x19,-	
	2903-000119	FILTER-CERAMIC;SFE10.7MJA-10-A	
LW	AH27-00007A	COIL-OSC;LKS7FB00-0060BLO-0,-,LW OSC	
OSC	AH27-00007A	COIL-OSC;LKS7FB00-0060BLO-0,-,LW OSC	
MW	AH27-00008A	COIL-OSC;LKS75M00-0060LMO-0,-,MW OSC	
OSC	AH27-00008A	COIL-OSC;LKS75M00-0060LMO-0,-,MW OSC	
ANT	AH27-00011A	COIL-OSC;LKS75M00-X000262-0,-,LW ANT	
LW	AH27-00011A	COIL-OSC;LKS75M00-X000262-0,-,LW ANT	
ANT	AH27-00012A	COIL-OSC;LKS75M00-X000263-0,365UH,MW ANT	
MW	AH27-00012A	COIL-OSC;LKS75M00-X000263-0,365UH,MW ANT	
	AH40-10025S	TUNER-FM;KST-F404VA-1,4G,75ohm	
	AH92-00040A	**ASSY-PCB-FRONT COM;MAX932P,-**	**S.N.A.**
UIC2	1201-000163	IC-OP AMP;BA4560F-E2	
UX2	2801-001394	CRYSTAL-UNIT;32.768KHz,20ppm,28-AAY,12.5pF,	
UX1	2802-000181	RESONATOR-CERAMIC;6MHZ,0.3%,BK,9.0X4.0X7.5MM	
VR	3406-001022	SWITCH-ROTARY;5V,0.5mA,24Pulse/no click,12mm	
UCW8	3708-000454	CONNECTOR-FPC/FC/PIC;22P,1.25MM,STRAIGHT,	

Location no.	Code no.	Description & Specifiation	Remarks
UCW3	3710-001045	CONNECTOR-SOCKET;22P,1R,1.25MM,ANGLE,SN	
	3710-001046	CONNECTOR-SOCKET;10P,1R,1.25MM,ANGLE,SN	
UCW5	3711-000814	CONNECTOR-HEADER;BOX,2P,1R,2.5mm,ANGLE,SN	
REM1	AC59-60060A	MODULE-REMOCON;GP1U281R,SHARP,38KHZ,-,-,-,-	
UIC3	AH14-10007D	IC;NJU3716M,SOP,STICK EXPANDER 16BIT	
UCW6	AH39-00019A	LEAD-CONNECTOR ASSY;-,GT201-11,35023,11P,150MM,1007#28	
UCW7	AH39-00020A	LEAD-CONNECTOR ASSY;-,GT201-13,35023,13P,150MM,1007#28	
UCW1	AH39-20012W	LEAD-CONNECTOR ASS'Y;SC25,JC25,2P,150MM,1007#26	
UD1	0401-000101	DIODE-SWITCHING;1N4148,100V,200mA,DO-35,TP	
UD11	0401-000101	DIODE-SWITCHING;1N4148,100V,200mA,DO-35,TP	
UD16	0401-000101	DIODE-SWITCHING;1N4148,100V,200mA,DO-35,TP	
UD17	0401-000101	DIODE-SWITCHING;1N4148,100V,200mA,DO-35,TP	
UD18	0401-000101	DIODE-SWITCHING;1N4148,100V,200mA,DO-35,TP	
UD19	0401-000101	DIODE-SWITCHING;1N4148,100V,200mA,DO-35,TP	
UD2	0401-000101	DIODE-SWITCHING;1N4148,100V,200mA,DO-35,TP	
UD20	0401-000101	DIODE-SWITCHING;1N4148,100V,200mA,DO-35,TP	
UD21	0401-000101	DIODE-SWITCHING;1N4148,100V,200mA,DO-35,TP	
UD22	0401-000101	DIODE-SWITCHING;1N4148,100V,200mA,DO-35,TP	
UD12	0402-000127	DIODE-RECTIFIER;1N4002,100V,1A,DO-41,TP	
UD13	0402-000127	DIODE-RECTIFIER;1N4002,100V,1A,DO-41,TP	
UD14	0402-000127	DIODE-RECTIFIER;1N4002,100V,1A,DO-41,TP	
UD15	0402-000127	DIODE-RECTIFIER;1N4002,100V,1A,DO-41,TP	
UQ1	0501-000398	TR-SMALL SIGNAL;KSC945,NPN,250mW,TO-92,TP,120-	
UQ10	0501-000398	TR-SMALL SIGNAL;KSC945,NPN,250mW,TO-92,TP,120-	
UQ11	0501-000398	TR-SMALL SIGNAL;KSC945,NPN,250mW,TO-92,TP,120-	
UQ2	0501-000398	TR-SMALL SIGNAL;KSC945,NPN,250mW,TO-92,TP,120-	
UQ3	0501-000398	TR-SMALL SIGNAL;KSC945,NPN,250mW,TO-92,TP,120-	
UQ15	0501-000610	TR-SMALL SIGNAL;KSA928A-Y,PNP,1W,TO-92L,TP,160	
UQ16	0501-000610	TR-SMALL SIGNAL;KSA928A-Y,PNP,1W,TO-92L,TP,160	
UQ7	0501-000610	TR-SMALL SIGNAL;KSA928A-Y,PNP,1W,TO-92L,TP,160	
UQ12	0504-000118	TR-DIGITAL;KSR1003,NPN,300MW,22K/22K,TO-92,TP	
UQ13	0504-000118	TR-DIGITAL;KSR1003,NPN,300MW,22K/22K,TO-92,TP	
UQ14	0504-000118	TR-DIGITAL;KSR1003,NPN,300MW,22K/22K,TO-92,TP	
UQ4	0504-000118	TR-DIGITAL;KSR1003,NPN,300MW,22K/22K,TO-92,TP	
UQ5	0504-000118	TR-DIGITAL;KSR1003,NPN,300MW,22K/22K,TO-92,TP	
UQ6	0504-000118	TR-DIGITAL;KSR1003,NPN,300MW,22K/22K,TO-92,TP	
UQ8	0504-000122	TR-DIGITAL;KSR1009Y,NPN,300mW,4.7K,TO-92,	
UQ9	0504-000122	TR-DIGITAL;KSR1009Y,NPN,300mW,4.7K,TO-92,	
ULD17	0601-001218	LED;INVERTER,AMB,3mm,610nm	
ULD18	0601-001218	LED;INVERTER,AMB,3mm,610nm	
ULD19	0601-001238	LED;ROUND,RED,3.1mm,697nm	
UR20	2001-000028	R-CARBON(S);100OHM,5%,1/2W,AA,TP,2.4X6.4MM	
UR21	2001-000028	R-CARBON(S);100OHM,5%,1/2W,AA,TP,2.4X6.4MM	
UR121	2001-000221	R-CARBON;1.2KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
UR126	2001-000221	R-CARBON;1.2KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
UR127	2001-000221	R-CARBON;1.2KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
UR57	2001-000221	R-CARBON;1.2KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
UR58	2001-000221	R-CARBON;1.2KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
UR72	2001-000221	R-CARBON;1.2KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
UR73	2001-000221	R-CARBON;1.2KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
UR125	2001-000241	R-CARBON;1.5KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
UR26	2001-000241	R-CARBON;1.5KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
UR71	2001-000241	R-CARBON;1.5KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
UR124	2001-000258	R-CARBON;1.8KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
UR25	2001-000258	R-CARBON;1.8KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
UR67	2001-000258	R-CARBON;1.8KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
UR116	2001-000273	R-CARBON;100KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
UR122	2001-000273	R-CARBON;100KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
UR123	2001-000273	R-CARBON;100KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
UR28	2001-000273	R-CARBON;100KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
UR29	2001-000273	R-CARBON;100KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
UR36	2001-000273	R-CARBON;100KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
UR61	2001-000273	R-CARBON;100KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
UR65	2001-000273	R-CARBON;100KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
UR69	2001-000273	R-CARBON;100KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
UR10	2001-000290	R-CARBON;10KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
UR11	2001-000290	R-CARBON;10KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
UR111	2001-000290	R-CARBON;10KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
UR112	2001-000290	R-CARBON;10KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
UR115	2001-000290	R-CARBON;10KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
UR12	2001-000290	R-CARBON;10KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
UR18	2001-000290	R-CARBON;10KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
UR30	2001-000290	R-CARBON;10KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
UR32	2001-000290	R-CARBON;10KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
UR35	2001-000290	R-CARBON;10KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
UR55	2001-000290	R-CARBON;10KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
UR56	2001-000290	R-CARBON;10KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
UR6	2001-000290	R-CARBON;10KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
UR60	2001-000290	R-CARBON;10KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
UR62	2001-000290	R-CARBON;10KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
UR63	2001-000290	R-CARBON;10KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
UR68	2001-000290	R-CARBON;10KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
UR7	2001-000290	R-CARBON;10KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
UR8	2001-000290	R-CARBON;10KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
UR9	2001-000290	R-CARBON;10KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
UR98	2001-000290	R-CARBON;10KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
UR99	2001-000290	R-CARBON;10KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
UR53	2001-000362	R-CARBON;150OHM,5%,1/8W,AA,TP,1.8X3.2MM	
UR70	2001-000362	R-CARBON;150OHM,5%,1/8W,AA,TP,1.8X3.2MM	
UR92	2001-000362	R-CARBON;150OHM,5%,1/8W,AA,TP,1.8X3.2MM	
UR33	2001-000397	R-CARBON;180KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
UR102	2001-000429	R-CARBON;1KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
UR103	2001-000429	R-CARBON;1KOHM,5%,1/8W,AA,TP,1.8X3.2MM	

Location no.	Code no.	Description & Specification	Remarks
UR104	2001-000429	R-CARBON;1KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
UR105	2001-000429	R-CARBON;1KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
UR106	2001-000429	R-CARBON;1KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
UR107	2001-000429	R-CARBON;1KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
UR108	2001-000429	R-CARBON;1KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
UR109	2001-000429	R-CARBON;1KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
UR110	2001-000429	R-CARBON;1KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
UR113	2001-000429	R-CARBON;1KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
UR114	2001-000429	R-CARBON;1KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
UR14	2001-000429	R-CARBON;1KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
UR27	2001-000429	R-CARBON;1KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
UR59	2001-000429	R-CARBON;1KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
UR83	2001-000429	R-CARBON;1KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
UR84	2001-000429	R-CARBON;1KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
UR85	2001-000429	R-CARBON;1KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
UR86	2001-000429	R-CARBON;1KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
UR87	2001-000429	R-CARBON;1KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
UR88	2001-000429	R-CARBON;1KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
UR89	2001-000429	R-CARBON;1KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
UR90	2001-000429	R-CARBON;1KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
UR91	2001-000429	R-CARBON;1KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
UR93	2001-000429	R-CARBON;1KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
UR94	2001-000429	R-CARBON;1KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
UR95	2001-000429	R-CARBON;1KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
UR96	2001-000429	R-CARBON;1KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
UR17	2001-000449	R-CARBON;2.2KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
UR66	2001-000449	R-CARBON;2.2KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
UR119	2001-000472	R-CARBON;2.7KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
UR66	2001-000472	R-CARBON;2.7KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
UR4	2001-000508	R-CARBON;220KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
UR120	2001-000613	R-CARBON;3.9KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
UR129	2001-000734	R-CARBON;4.7KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
UR16	2001-000734	R-CARBON;4.7KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
UR22	2001-000734	R-CARBON;4.7KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
UR23	2001-000734	R-CARBON;4.7KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
UR31	2001-000734	R-CARBON;4.7KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
UR39	2001-000734	R-CARBON;4.7KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
UR40	2001-000734	R-CARBON;4.7KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
UR41	2001-000734	R-CARBON;4.7KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
UR42	2001-000734	R-CARBON;4.7KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
UR43	2001-000734	R-CARBON;4.7KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
UR44	2001-000734	R-CARBON;4.7KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
UR45	2001-000734	R-CARBON;4.7KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
UR46	2001-000734	R-CARBON;4.7KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
UR47	2001-000734	R-CARBON;4.7KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
UR48	2001-000734	R-CARBON;4.7KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
UR49	2001-000734	R-CARBON;4.7KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
UR79	2001-000734	R-CARBON;4.7KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
UR5	2001-000793	R-CARBON;47OHM,5%,1/8W,AA,TP,1.8X3.2MM	
UR24	2001-000802	R-CARBON;5.6Kohm,5%,1/8W,AA,TP,1.8x3.2m	
UR100	2001-000924	R-CARBON;680OHM,5%,1/8W,AA,TP,1.8X3.2MM	
UR117	2001-000924	R-CARBON;680OHM,5%,1/8W,AA,TP,1.8X3.2MM	
UR118	2001-000924	R-CARBON;680OHM,5%,1/8W,AA,TP,1.8X3.2MM	
UR13	2001-000924	R-CARBON;680OHM,5%,1/8W,AA,TP,1.8X3.2MM	
UR37	2001-000924	R-CARBON;680OHM,5%,1/8W,AA,TP,1.8X3.2MM	
UR52	2001-000924	R-CARBON;680OHM,5%,1/8W,AA,TP,1.8X3.2MM	
UR54	2001-000924	R-CARBON;680OHM,5%,1/8W,AA,TP,1.8X3.2MM	
UR64	2001-000924	R-CARBON;680OHM,5%,1/8W,AA,TP,1.8X3.2MM	
UR97	2001-000924	R-CARBON;680OHM,5%,1/8W,AA,TP,1.8X3.2MM	
UR101	2001-000995	R-CARBON;820OHM,5%,1/8W,AA,TP,1.8X3.2MM	
UR128	2001-000995	R-CARBON;820OHM,5%,1/8W,AA,TP,1.8X3.2MM	
UR19	2001-000995	R-CARBON;820OHM,5%,1/8W,AA,TP,1.8X3.2MM	
UR34	2001-000995	R-CARBON;820OHM,5%,1/8W,AA,TP,1.8X3.2MM	
UR51	2001-000995	R-CARBON;820OHM,5%,1/8W,AA,TP,1.8X3.2MM	
UR74	2001-000995	R-CARBON;820OHM,5%,1/8W,AA,TP,1.8X3.2MM	
UVR2	2103-000341	VR-SEMI;2Kohm,30%,1/10W,TOP	
UC17	2201-000247	C-CERAMIC,DISC;15pF,5%,50V,CH,TP,5x3,5	
UC18	2201-000247	C-CERAMIC,DISC;15pF,5%,50V,CH,TP,5x3,5	
UC26	2201-000300	C-CERAMIC,DISC;1NF,20%,50V,Y5T,TP,5X3,5	
UC21	2201-000397	C-CERAMIC,DISC;24pF,5%,50V,CH,TP,5.0x3.0,5	
UC19	2201-000423	C-CERAMIC,DISC;27pF,5%,50V,NPO,TP,5x3,2.5	
UC20	2201-000423	C-CERAMIC,DISC;27pF,5%,50V,NPO,TP,5x3,2.5	
UC22	2201-000426	C-CERAMIC,DISC;27pF,5%,50V,SL,TP,5x3,5	
UC15	2201-000565	C-CERAMIC,DISC;47nF,20%,50V,Y5V,12.5x4.0mm,5mm,TP	
UC27	2201-000565	C-CERAMIC,DISC;47nF,20%,50V,Y5V,12.5x4.0mm,5mm,TP	
UC6	2201-000828	C-CERAMIC,DISC;3.3nF,20%,400V,Y5U,TP,13x7,7.5	
UC29	2202-000796	C-CERAMIC,MLC-AXIAL;1nF,10%,50V,Y5P,TP,3.5x19,-	
UC13	2202-000854	C-CERAMIC,MLC-AXIAL;47NF,30%,50V,Y5R,TP,3.5X1.9,-	
UC14	2202-000854	C-CERAMIC,MLC-AXIAL;47NF,30%,50V,Y5R,TP,3.5X1.9,-	
UC2	2202-000854	C-CERAMIC,MLC-AXIAL;47NF,30%,50V,Y5R,TP,3.5X1.9,-	
UC12	2401-000240	C-AL;100uF,20%,10V,GP,TP,5x11,5	
UC16	2401-000475	C-AL;10UF,20%,50V,GP,-,5X11,2MM	
UC28	2401-000475	C-AL;10UF,20%,50V,GP,-,5X11,2MM	
UC5	2401-000795	C-AL;220UF,20%,16V,GP,-,8X11.5,3.5M	
UC23	2401-000918	C-AL;22uF,20%,16V,GP,-,6.3x7,5	
UC24	2401-000918	C-AL;22uF,20%,16V,GP,-,6.3x7,5	
UC10	2401-001511	C-AL;47UF,20%,16V,GP,-,6X7,5	
UC8	2401-001511	C-AL;47UF,20%,16V,GP,-,6X7,5	
UC25	2401-001917	C-AL;1UF,20%,50V,-,TP,5X7MM,5	
UC7	2401-001917	C-AL;1UF,20%,50V,-,TP,5X7MM,5	
UC4	2401-001931	C-AL;220NF,20%,50V,-,TP,4X7MM,5	
UC11	2401-001952	C-AL;4.7UF,20%,50V,-,TP,6.3X7,5	
UC3	2401-001952	C-AL;4.7UF,20%,50V,-,TP,6.3X7,5	
UC9	2401-001952	C-AL;4.7UF,20%,50V,-,TP,6.3X7,5	
UC1	2409-000123	C-EDL;47000UF,4UA,5.5V,-,BK,-,5MM	
SW1	3404-000165	SWITCH-TACT;12V,50MA,160GF+-50GF,6X6MM,SPS	
SW10	3404-000165	SWITCH-TACT;12V,50MA,160GF+-50GF,6X6MM,SPS	
SW11	3404-000165	SWITCH-TACT;12V,50MA,160GF+-50GF,6X6MM,SPS	
SW12	3404-000165	SWITCH-TACT;12V,50MA,160GF+-50GF,6X6MM,SPS	
SW13	3404-000165	SWITCH-TACT;12V,50MA,160GF+-50GF,6X6MM,SPS	
SW14	3404-000165	SWITCH-TACT;12V,50MA,160GF+-50GF,6X6MM,SPS	
SW15	3404-000165	SWITCH-TACT;12V,50MA,160GF+-50GF,6X6MM,SPS	
SW16	3404-000165	SWITCH-TACT;12V,50MA,160GF+-50GF,6X6MM,SPS	
SW17	3404-000165	SWITCH-TACT;12V,50MA,160GF+-50GF,6X6MM,SPS	
SW18	3404-000165	SWITCH-TACT;12V,50MA,160GF+-50GF,6X6MM,SPS	
SW19	3404-000165	SWITCH-TACT;12V,50MA,160GF+-50GF,6X6MM,SPS	
SW2	3404-000165	SWITCH-TACT;12V,50MA,160GF+-50GF,6X6MM,SPS	
SW20	3404-000165	SWITCH-TACT;12V,50MA,160GF+-50GF,6X6MM,SPS	
SW21	3404-000165	SWITCH-TACT;12V,50MA,160GF+-50GF,6X6MM,SPS	
SW22	3404-000165	SWITCH-TACT;12V,50MA,160GF+-50GF,6X6MM,SPS	
SW23	3404-000165	SWITCH-TACT;12V,50MA,160GF+-50GF,6X6MM,SPS	
SW24	3404-000165	SWITCH-TACT;12V,50MA,160GF+-50GF,6X6MM,SPS	
SW25	3404-000165	SWITCH-TACT;12V,50MA,160GF+-50GF,6X6MM,SPS	
SW26	3404-000165	SWITCH-TACT;12V,50MA,160GF+-50GF,6X6MM,SPS	
SW27	3404-000165	SWITCH-TACT;12V,50MA,160GF+-50GF,6X6MM,SPS	
SW28	3404-000165	SWITCH-TACT;12V,50MA,160GF+-50GF,6X6MM,SPS	
SW3	3404-000165	SWITCH-TACT;12V,50MA,160GF+-50GF,6X6MM,SPS	
SW4	3404-000165	SWITCH-TACT;12V,50MA,160GF+-50GF,6X6MM,SPS	
SW5	3404-000165	SWITCH-TACT;12V,50MA,160GF+-50GF,6X6MM,SPS	
SW6	3404-000165	SWITCH-TACT;12V,50MA,160GF+-50GF,6X6MM,SPS	
SW7	3404-000165	SWITCH-TACT;12V,50MA,160GF+-50GF,6X6MM,SPS	
SW8	3404-000165	SWITCH-TACT;12V,50MA,160GF+-50GF,6X6MM,SPS	
SW9	3404-000165	SWITCH-TACT;12V,50MA,160GF+-50GF,6X6MM,SPS	
	AH92-00041A	**ASSY-PCB-MAIN COM;MAX932P,-**	**S.N.A.**
PBD1	0402-001258	DIODE-BRIDGE;GBU606,600V,6A,SIP-4,BK	
AQ17	0502-000303	TR-POWER;KSD882,NPN,1W,TO-126,TP,160-32	
AQ18	0502-000303	TR-POWER;KSD882,NPN,1W,TO-126,TP,160-32	
PQ7	0502-000407	TR-POWER;KTC4369Y,NPN,15W,TO-220,BK,120	
AQ11	0503-001013	TR-DARLINGTON;2SD2494,NPN,60W,TO-3P,BK,6500-20000	
AQ9	0503-001013	TR-DARLINGTON;2SD2494,NPN,60W,TO-3P,BK,6500-20000	
PQ1	0503-001014	TR-DARLINGTON;2SD2495-P,NPN,30W,TO-220F,BK,6500-20000	
AQ10	0503-001015	TR-DARLINGTON;2SB1625-P,PNP,60W,TO-3P,BK,6500-20000	
AQ8	0503-001015	TR-DARLINGTON;2SB1625-P,PNP,60W,TO-3P,BK,6500-20000	
DIC1	1201-000358	IC-PREAMP;22291,DIP,24P,-,DUAL,-,PLASTIC	
	1203-000300	IC-POSI.FIXED REG.;7810,TO-220,3P,-,PLASTIC,9.6/1	
FIC4	1204-001465	IC-VOLUME/TONE CONT.;TDA7440D,SOP,28,18.	
AR1	2003-000390	R-METAL OXIDE(S);0.27OHM,5%,2W,AA,TP,4X12MM	
AR2	2003-000390	R-METAL OXIDE(S);0.27OHM,5%,2W,AA,TP,4X12MM	
AR24	2003-000390	R-METAL OXIDE(S);0.27OHM,5%,2W,AA,TP,4X12MM	
AR25	2003-000390	R-METAL OXIDE(S);0.27OHM,5%,2W,AA,TP,4X12MM	
PR31	2003-000690	R-METAL OXIDE(S);4.7ohm,5%,2W,AA,TP,4x12mm	
PR32	2003-000690	R-METAL OXIDE(S);4.7ohm,5%,2W,AA,TP,4x12mm	
PR1	2003-000734	R-METAL OXIDE(S);560ohm,5%,2W,AA,TP,4x12mm	
	2201-000546	C-CERAMIC,DISC;4.7NF,20%,400V,Y5U,BK,16X7,10	
	2201-000795	C-CERAMIC,DISC;10nF,10%,400V,Y5P,TP,15x10,5	
PC1	2401-002592	C-AL;2200uF,20%,50V,GP,TP,18x35.5,7	
PC2	2401-002592	C-AL;2200uF,20%,50V,GP,TP,18x35.5,7	
	3601-000160	FUSE-FERRULE;250V,1.25A,SB,GLASS,5x20mm	
	3711-000190	CONNECTOR-HEADER;1WALL,2P,1R,7.92MM,STRAIGHT,SN	
ACW1	3711-000820	CONNECTOR-HEADER;BOX,2P,1R,2.5mm,STRAIGHT,SN	
FCW1	3711-002809	CONNECTOR-HEADER;BOX,8P,1R,2mm,STRAIGHT,SN	
	3711-003097	CONNECTOR-HEADER;NOWALL,10P,1R,1.25MM,ANGLE,SN	
CCW1	3711-003104	CONNECTOR-HEADER;NOWALL,22P,1R,1.25MM,ANGLE,SN	
DCW1	3711-003107	CONNECTOR-HEADER;BOX,3P,1R,2.5mm,STRAIGHT,SN	
DCW4	3711-003107	CONNECTOR-HEADER;BOX,3P,1R,2.5mm,STRAIGHT,SN	
DCW2	3711-003111	CONNECTOR-HEADER;BOX,6P,1R,2.5mm,-,BRAS	
PCW2	3711-003111	CONNECTOR-HEADER;BOX,6P,1R,2.5mm,-,BRAS	
FCW2	3711-004109	CONNECTOR-HEADER;3WALL,14P,1R,2mm,STRAIGHT,SN	
AJACK1	3716-000209	TERMINAL-BLOCK;,-,-,60V,7A	
HJACK1	3722-000363	JACK-PHONE;9P,6.4MM,AU,BLK,-	
AJACK2	3722-000377	JACK-RCA;4P/2C,3.5MM,SN,BLK,#16~22	
FJACK	3722-000377	JACK-RCA;4P/2C,3.5MM,SN,BLK,#16~22	
DL4	AH26-10002G	TRANS-IF;IODT-N5002,BIAS-OSC,3.7MH,7.6X12.0,L6/10	
DL1	AH26-10002Y	COIL-TRAP;FB875-85A,BIAS-TRAP,35DB,8.0,180PF,85KHZ	
DL2	AH26-10002Y	COIL-TRAP;FB875-85A,BIAS-TRAP,35DB,8.0,180PF,85KHZ	
RL1	AH27-10001F	COIL-CHOKE;27UH,K,Q30,-,-,DR(6.5*7.5),-,-,	
RL2	AH27-10001F	COIL-CHOKE;27UH,K,Q30,-,-,DR(6.5*7.5),-,-,	
AL1	AH27-90001A	COIL-SPRING;,2.2UH,-,-,SPRING	
AL2	AH27-90001A	COIL-SPRING;,2.2UH,-,-,SPRING	
FAN	AH31-10020A	FAN-DC;D0620B-12M,12VDC/0.16A,	
	AH39-00018A	LEAD-CONNECTOR ASSY;-,5264,51088,6P,300MM,1007#22	
	AH39-50001L	LEAD-FASTEN;RING,1007#24,200MM,BLK	
BRK1	AH61-10767A	BRACKET—H/SINK;-,SPTE,-,SEC1.0T,-,-,MAX940,-	
HE/SI	AH62-32009A	HEAT SINK-M;-,AL,-,-,-,-,-,MAX940	
AD1	0401-000101	DIODE-SWITCHING;1N4148,100V,200mA,DO-35,TP	
AD2	0401-000101	DIODE-SWITCHING;1N4148,100V,200mA,DO-35,TP	
AD3	0401-000101	DIODE-SWITCHING;1N4148,100V,200mA,DO-35,TP	
AD4	0401-000101	DIODE-SWITCHING;1N4148,100V,200mA,DO-35,TP	
AD5	0401-000101	DIODE-SWITCHING;1N4148,100V,200mA,DO-35,TP	
DD1	0401-000101	DIODE-SWITCHING;1N4148,100V,200mA,DO-35,TP	
DD2	0401-000101	DIODE-SWITCHING;1N4148,100V,200mA,DO-35,TP	
DD3	0401-000101	DIODE-SWITCHING;1N4148,100V,200mA,DO-35,TP	
DD5	0401-000101	DIODE-SWITCHING;1N4148,100V,200mA,DO-35,TP	
DD6	0401-000101	DIODE-SWITCHING;1N4148,100V,200mA,DO-35,TP	
FD2	0401-000101	DIODE-SWITCHING;1N4148,100V,200mA,DO-35,TP	

Location no.	Code no.	Description & Specifiation	Remarks
PD3	0401-000101	DIODE-SWITCHING;1N4148,100V,200mA,DO-35,TP	
PD7	0401-000101	DIODE-SWITCHING;1N4148,100V,200mA,DO-35,TP	
PD1	0402-000127	DIODE-RECTIFIER;1N4002,100V,1A,DO-41,TP	
PD2	0402-000127	DIODE-RECTIFIER;1N4002,100V,1A,DO-41,TP	
PD4	0402-000127	DIODE-RECTIFIER;1N4002,100V,1A,DO-41,TP	
PD5	0402-000127	DIODE-RECTIFIER;1N4002,100V,1A,DO-41,TP	
PD6	0402-000151	DIODE-RECTIFIER;1N5392,100V,1.5A,DO-15,TP	
EZD1	0403-000354	DIODE-ZENER;UZ5.1B,5.1V,4.8-5.4V,500mW,DO-	
PZD5	0403-000354	DIODE-ZENER;UZ5.1B,5.1V,4.8-5.4V,500mW,DO-	
PZD9	0403-000354	DIODE-ZENER;UZ5.1B,5.1V,4.8-5.4V,500mW,DO-	
PZD4	0403-000377	DIODE-ZENER;UZP10B,10V,9.4-10.6V,1W,DO-41,	
PZD6	0403-000377	DIODE-ZENER;UZP10B,10V,9.4-10.6V,1W,DO-41,	
PZD7	0403-000379	DIODE-ZENER;UZP12B,12V,11.4-12.6V,1W,DO-41	
PZD8	0403-000379	DIODE-ZENER;UZP12B,12V,11.4-12.6V,1W,DO-41	
PZD3	0403-000396	DIODE-ZENER;UZP6.8B,6.8V,6.4-7.2V,1W,DO	
PZD1	0403-000564	DIODE-ZENER;TZP16A,16V,15.3-17.1V,1W,DO-41	
PZD2	0403-000564	DIODE-ZENER;TZP16A,16V,15.3-17.1V,1W,DO-41	
DQ22	0501-000010	TR-SMALL SIGNAL;KSC1008,NPN,800mW,TO-92,TP,120	
DQ7	0501-000010	TR-SMALL SIGNAL;KSC1008,NPN,800mW,TO-92,TP,120	
DQ8	0501-000010	TR-SMALL SIGNAL;KSC1008,NPN,800mW,TO-92,TP,120	
DQ9	0501-000010	TR-SMALL SIGNAL;KSC1008,NPN,800mW,TO-92,TP,120	
FQ4	0501-000010	TR-SMALL SIGNAL;KSC1008,NPN,800mW,TO-92,TP,120	
PQ3	0501-000010	TR-SMALL SIGNAL;KSC1008,NPN,800mW,TO-92,TP,120	
PQ5	0501-000010	TR-SMALL SIGNAL;KSC1008,NPN,800mW,TO-92,TP,120	
PQ6	0501-000010	TR-SMALL SIGNAL;KSC1008,NPN,800mW,TO-92,TP,120	
AQ12	0501-000294	TR-SMALL SIGNAL;KSA708-Y,PNP,800mW,TO-92,TP,12	
AQ4	0501-000294	TR-SMALL SIGNAL;KSA708-Y,PNP,800mW,TO-92,TP,12	
PQ10	0501-000294	TR-SMALL SIGNAL;KSA708-Y,PNP,800mW,TO-92,TP,12	
PQ8	0501-000294	TR-SMALL SIGNAL;KSA708-Y,PNP,800mW,TO-92,TP,12	
AQ22	0501-000296	TR-SMALL SIGNAL;KSA709-Y,PNP,800mW,TO-92,TP,12	
PQ17	0501-000331	TR-SMALL SIGNAL;KSC1009-Y,NPN,800mW,TO-92,-,12	
AQ19	0501-000354	TR-SMALL SIGNAL;KSC1845-F,NPN,500mW,TO-92,TP,3	
AQ2	0501-000354	TR-SMALL SIGNAL;KSC1845-F,NPN,500mW,TO-92,TP,3	
AQ20	0501-000354	TR-SMALL SIGNAL;KSC1845-F,NPN,500mW,TO-92,TP,3	
AQ3	0501-000354	TR-SMALL SIGNAL;KSC1845-F,NPN,500mW,TO-92,TP,3	
DQ5	0501-000369	TR-SMALL SIGNAL;KSC2331-Y,NPN,1W,TO-92L,-,120-	
PQ4	0501-000369	TR-SMALL SIGNAL;KSC2331-Y,NPN,1W,TO-92L,-,120-	
AQ1	0501-000398	TR-SMALL SIGNAL;KSC945,NPN,250mW,TO-92,TP,120-	
AQ16	0501-000398	TR-SMALL SIGNAL;KSC945,NPN,250mW,TO-92,TP,120-	
DQ13	0501-000398	TR-SMALL SIGNAL;KSC945,NPN,250mW,TO-92,TP,120-	
DQ19	0501-000398	TR-SMALL SIGNAL;KSC945,NPN,250mW,TO-92,TP,120-	
DQ20	0501-000398	TR-SMALL SIGNAL;KSC945,NPN,250mW,TO-92,TP,120-	
DQ21	0501-000398	TR-SMALL SIGNAL;KSC945,NPN,250mW,TO-92,TP,120-	
DQ6	0501-000398	TR-SMALL SIGNAL;KSC945,NPN,250mW,TO-92,TP,120-	
EQ1	0501-000398	TR-SMALL SIGNAL;KSC945,NPN,250mW,TO-92,TP,120-	
AQ13	0501-000407	TR-SMALL SIGNAL;KSD471A-Y,NPN,800mW,TO-92,-,12	
AQ15	0501-000407	TR-SMALL SIGNAL;KSD471A-Y,NPN,800mW,TO-92,-,12	
AQ5	0501-000407	TR-SMALL SIGNAL;KSD471A-Y,NPN,800mW,TO-92,-,12	
AQ7	0501-000407	TR-SMALL SIGNAL;KSD471A-Y,NPN,800mW,TO-92,-,12	
DQ3	0501-000407	TR-SMALL SIGNAL;KSD471A-Y,NPN,800mW,TO-92,-,12	
DQ4	0501-000610	TR-SMALL SIGNAL;KSA928A-Y,PNP,1W,TO-92L,TP,160	
PQ11	0501-000610	TR-SMALL SIGNAL;KSA928A-Y,PNP,1W,TO-92L,TP,160	
PQ15	0501-000610	TR-SMALL SIGNAL;KSA928A-Y,PNP,1W,TO-92L,TP,160	
AQ14	0501-002188	TR-SMALL SIGNAL;KSA992,PNP,500mW,TO-92,TP,300-	
AQ6	0501-002188	TR-SMALL SIGNAL;KSA992,PNP,500mW,TO-92,TP,300-	
AQ23	0504-000118	TR-DIGITAL;KSR1003,NPN,300MW,22K/22K,TO-92,TP	
DQ18	0504-000118	TR-DIGITAL;KSR1003,NPN,300MW,22K/22K,TO-92,TP	
FQ7	0504-000118	TR-DIGITAL;KSR1003,NPN,300MW,22K/22K,TO-92,TP	
FQ8	0504-000118	TR-DIGITAL;KSR1003,NPN,300MW,22K/22K,TO-92,TP	
PQ13	0504-000118	TR-DIGITAL;KSR1003,NPN,300MW,22K/22K,TO-92,TP	
PQ9	0504-000118	TR-DIGITAL;KSR1003,NPN,300MW,22K/22K,TO-92,TP	
AQ21	0504-000122	TR-DIGITAL;KSR1009Y,NPN,300mW,4.7K,TO-92,	
DQ17	0504-000122	TR-DIGITAL;KSR1009Y,NPN,300mW,4.7K,TO-92,	
FQ2	0504-000122	TR-DIGITAL;KSR1009Y,NPN,300mW,4.7K,TO-92,	
FQ3	0504-000122	TR-DIGITAL;KSR1009Y,NPN,300mW,4.7K,TO-92,	
PQ18	0504-000122	TR-DIGITAL;KSR1009Y,NPN,300mW,4.7K,TO-92,	
DQ1	0504-001003	TR-DIGITAL;KSR2003,PNP,300MW,22K/22K,TO-92,TP	
DQ10	0504-001003	TR-DIGITAL;KSR2003,PNP,300MW,22K/22K,TO-92,TP	
DQ2	0504-001003	TR-DIGITAL;KSR2003,PNP,300MW,22K/22K,TO-92,TP	
FQ1	0504-001003	TR-DIGITAL;KSR2003,PNP,300MW,22K/22K,TO-92,TP	
FQ5	0504-001003	TR-DIGITAL;KSR2003,PNP,300MW,22K/22K,TO-92,TP	
FQ6	0504-001003	TR-DIGITAL;KSR2003,PNP,300MW,22K/22K,TO-92,TP	
PQ14	0504-001003	TR-DIGITAL;KSR2003,PNP,300MW,22K/22K,TO-92,TP	
PQ16	0504-001003	TR-DIGITAL;KSR2003,PNP,300MW,22K/22K,TO-92,TP	
FIC3	1001-001065	IC-ANALOG SWITCH;NJU4066BM,CMOS,DMP,14P,	
FIC1	1201-000163	IC-OP AMP;BA4560F-E2	
FIC2	1201-000163	IC-OP AMP;BA4560F-E2	
FIC5	1201-000163	IC-OP AMP;BA4560F-E2	
AR30	2001-000003	R-CARBON;330OHM,5%,1/8W,AA,TP,1.8X3.2MM	
AR8	2001-000003	R-CARBON;330OHM,5%,1/8W,AA,TP,1.8X3.2MM	
DR13	2001-000003	R-CARBON;330OHM,5%,1/8W,AA,TP,1.8X3.2MM	
DR52	2001-000003	R-CARBON;330OHM,5%,1/8W,AA,TP,1.8X3.2MM	
DR55	2001-000008	R-CARBON;15KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
DR6	2001-000008	R-CARBON;15KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
ER9	2001-000008	R-CARBON;15KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
FR37	2001-000008	R-CARBON;15KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
FR40	2001-000008	R-CARBON;15KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
DR8	2001-000010	R-CARBON;68KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
PR14	2001-000019	R-CARBON(S);10OHM,5%,1/2W,AA,TP,2.4X6.4MM	
PR22	2001-000020	R-CARBON(S);22OHM,5%,1/2W,AA,TP,2.4X6.4MM	
PR34	2001-000020	R-CARBON(S);22OHM,5%,1/2W,AA,TP,2.4X6.4MM	
AR11	2001-000028	R-CARBON(S);100OHM,5%,1/2W,AA,TP,2.4X6.4MM	
AR28	2001-000028	R-CARBON(S);100OHM,5%,1/2W,AA,TP,2.4X6.4MM	
AR33	2001-000028	R-CARBON(S);100OHM,5%,1/2W,AA,TP,2.4X6.4MM	
AR5	2001-000028	R-CARBON(S);100OHM,5%,1/2W,AA,TP,2.4X6.4MM	
PR14	2001-000028	R-CARBON(S);100OHM,5%,1/2W,AA,TP,2.4X6.4MM	
ER6	2001-000036	R-CARBON;330OHM,5%,1/4W,AA,TP,2.4X6.4MM	
AR44	2001-000109	R-CARBON(S);470OHM,5%,1/2W,AA,TP,2.4X6.4MM	
AR45	2001-000109	R-CARBON(S);470OHM,5%,1/2W,AA,TP,2.4X6.4MM	
PR25	2001-000109	R-CARBON(S);470OHM,5%,1/2W,AA,TP,2.4X6.4MM	
PR16	2001-000117	R-CARBON(S);68OHM,5%,1/2W,AA,TP,2.4X6.4MM	
AR22	2001-000221	R-CARBON;1.2KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
AR42	2001-000221	R-CARBON;1.2KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
FR19	2001-000241	R-CARBON;1.5KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
FR20	2001-000241	R-CARBON;1.5KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
FR21	2001-000241	R-CARBON;1.5KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
FR24	2001-000241	R-CARBON;1.5KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
PR100	2001-000241	R-CARBON;1.5KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
PR28	2001-000241	R-CARBON;1.5KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
SR6	2001-000241	R-CARBON;1.5KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
DR3	2001-000258	R-CARBON;1.8KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
DR59	2001-000258	R-CARBON;1.8KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
FR35	2001-000258	R-CARBON;1.8KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
FR36	2001-000258	R-CARBON;1.8KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
AR15	2001-000273	R-CARBON;100KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
AR40	2001-000273	R-CARBON;100KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
DR9	2001-000273	R-CARBON;100KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
FR53	2001-000273	R-CARBON;100KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
PR37	2001-000273	R-CARBON;100KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
SR3	2001-000273	R-CARBON;100KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
AR16	2001-000281	R-CARBON;100OHM,5%,1/8W,AA,TP,1.8X3.2MM	
AR47	2001-000281	R-CARBON;100OHM,5%,1/8W,AA,TP,1.8X3.2MM	
AR49	2001-000281	R-CARBON;100OHM,5%,1/8W,AA,TP,1.8X3.2MM	
CR1	2001-000281	R-CARBON;100OHM,5%,1/8W,AA,TP,1.8X3.2MM	
CR2	2001-000281	R-CARBON;100OHM,5%,1/8W,AA,TP,1.8X3.2MM	
CR3	2001-000281	R-CARBON;100OHM,5%,1/8W,AA,TP,1.8X3.2MM	
FR30	2001-000281	R-CARBON;100OHM,5%,1/8W,AA,TP,1.8X3.2MM	
FR31	2001-000281	R-CARBON;100OHM,5%,1/8W,AA,TP,1.8X3.2MM	
FR50	2001-000281	R-CARBON;100OHM,5%,1/8W,AA,TP,1.8X3.2MM	
AR52	2001-000290	R-CARBON;10KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
AR53	2001-000290	R-CARBON;10KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
DD7	2001-000290	R-CARBON;10KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
DR15	2001-000290	R-CARBON;10KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
DR48	2001-000290	R-CARBON;10KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
DR49	2001-000290	R-CARBON;10KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
DR50	2001-000290	R-CARBON;10KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
DR68	2001-000290	R-CARBON;10KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
DR72	2001-000290	R-CARBON;10KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
ER11	2001-000290	R-CARBON;10KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
ER3	2001-000290	R-CARBON;10KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
ER4	2001-000290	R-CARBON;10KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
FR10	2001-000290	R-CARBON;10KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
FR2	2001-000290	R-CARBON;10KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
FR25	2001-000290	R-CARBON;10KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
FR26	2001-000290	R-CARBON;10KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
FR27	2001-000290	R-CARBON;10KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
FR34	2001-000290	R-CARBON;10KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
FR4	2001-000290	R-CARBON;10KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
FR51	2001-000290	R-CARBON;10KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
FR9	2001-000290	R-CARBON;10KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
PR11	2001-000290	R-CARBON;10KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
PR12	2001-000290	R-CARBON;10KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
PR15	2001-000290	R-CARBON;10KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
PR18	2001-000290	R-CARBON;10KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
PR36	2001-000290	R-CARBON;10KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
PR7	2001-000290	R-CARBON;10KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
ER2	2001-000319	R-CARBON;120KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
AR21	2001-000331	R-CARBON;12KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
DR12	2001-000331	R-CARBON;12KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
DR34	2001-000331	R-CARBON;12KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
PR10	2001-000331	R-CARBON;12KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
DR19	2001-000397	R-CARBON;180KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
DR73	2001-000397	R-CARBON;180KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
AR43	2001-000411	R-CARBON;18KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
AR6	2001-000411	R-CARBON;18KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
ER5	2001-000411	R-CARBON;18KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
AR14	2001-000429	R-CARBON;1KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
AR18	2001-000429	R-CARBON;1KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
AR20	2001-000429	R-CARBON;1KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
AR27	2001-000429	R-CARBON;1KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
AR34	2001-000429	R-CARBON;1KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
AR39	2001-000429	R-CARBON;1KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
AR4	2001-000429	R-CARBON;1KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
AR41	2001-000429	R-CARBON;1KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
DR57	2001-000429	R-CARBON;1KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
DR76	2001-000429	R-CARBON;1KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
PR4	2001-000429	R-CARBON;1KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
PR8	2001-000429	R-CARBON;1KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
SR4	2001-000429	R-CARBON;1KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
AR19	2001-000449	R-CARBON;2.2KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
AR48	2001-000449	R-CARBON;2.2KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
AR50	2001-000449	R-CARBON;2.2KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
DR25	2001-000449	R-CARBON;2.2KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
DR27	2001-000449	R-CARBON;2.2KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
DR28	2001-000449	R-CARBON;2.2KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
DR29	2001-000449	R-CARBON;2.2KOHM,5%,1/8W,AA,TP,1.8X3.2MM	

Location no.	Code no.	Description & Specifiation	Remarks
DR30	2001-000449	R-CARBON;2.2KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
DR31	2001-000449	R-CARBON;2.2KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
DR42	2001-000449	R-CARBON;2.2KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
DR43	2001-000449	R-CARBON;2.2KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
DR75	2001-000449	R-CARBON;2.2KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
DR77	2001-000449	R-CARBON;2.2KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
ER7	2001-000449	R-CARBON;2.2KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
FR1	2001-000449	R-CARBON;2.2KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
FR11	2001-000449	R-CARBON;2.2KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
PR26	2001-000449	R-CARBON;2.2KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
PR29	2001-000449	R-CARBON;2.2KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
AR10	2001-000472	R-CARBON;2.7KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
AR32	2001-000472	R-CARBON;2.7KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
FR14	2001-000515	R-CARBON;220OHM,5%,1/8W,AA,TP,1.8X3.2MM	
FR16	2001-000515	R-CARBON;220OHM,5%,1/8W,AA,TP,1.8X3.2MM	
FR52	2001-000515	R-CARBON;220OHM,5%,1/8W,AA,TP,1.8X3.2MM	
FR6	2001-000515	R-CARBON;220OHM,5%,1/8W,AA,TP,1.8X3.2MM	
FR8	2001-000515	R-CARBON;220OHM,5%,1/8W,AA,TP,1.8X3.2MM	
AR54	2001-000522	R-CARBON;22KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
DR24	2001-000522	R-CARBON;22KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
ER8	2001-000522	R-CARBON;22KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
FR12	2001-000522	R-CARBON;22KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
FR32	2001-000522	R-CARBON;22KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
FR33	2001-000522	R-CARBON;22KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
FR38	2001-000522	R-CARBON;22KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
FR39	2001-000522	R-CARBON;22KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
PR13	2001-000522	R-CARBON;22KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
PR17	2001-000522	R-CARBON;22KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
PR21	2001-000522	R-CARBON;22KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
PR35	2001-000522	R-CARBON;22KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
PR5	2001-000522	R-CARBON;22KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
PR9	2001-000522	R-CARBON;22KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
DR17	2001-000527	R-CARBON;22OHM,5%,1/8W,AA,TP,1.8X3.2MM	
DR46	2001-000527	R-CARBON;22OHM,5%,1/8W,AA,TP,1.8X3.2MM	
FR22	2001-000548	R-CARBON;270KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
FR23	2001-000548	R-CARBON;270KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
AR38	2001-000563	R-CARBON;27KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
AR55	2001-000591	R-CARBON;3.3KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
AR56	2001-000591	R-CARBON;3.3KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
DR11	2001-000591	R-CARBON;3.3KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
DR20	2001-000591	R-CARBON;3.3KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
DR5	2001-000591	R-CARBON;3.3KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
DR58	2001-000591	R-CARBON;3.3KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
DR70	2001-000591	R-CARBON;3.3KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
FR55	2001-000591	R-CARBON;3.3KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
FR71	2001-000591	R-CARBON;3.3KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
FR80	2001-000591	R-CARBON;3.3KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
SR7	2001-000591	R-CARBON;3.3KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
DR1	2001-000613	R-CARBON;3.9KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
DR61	2001-000613	R-CARBON;3.9KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
SR2	2001-000660	R-CARBON;33KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
DR69	2001-000663	R-CARBON;33OHM,5%,1/2W,AA,TP,3.3X9MM	
AR23	2001-000702	R-CARBON;39KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
AR37	2001-000702	R-CARBON;39KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
PR27	2001-000702	R-CARBON;39KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
DR54	2001-000708	R-CARBON;39OHM,5%,1/8W,AA,TP,1.8X3.2MM	
DR14	2001-000734	R-CARBON;4.7KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
DR23	2001-000734	R-CARBON;4.7KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
DR41	2001-000734	R-CARBON;4.7KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
DR67	2001-000734	R-CARBON;4.7KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
ER1	2001-000734	R-CARBON;4.7KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
ER10	2001-000734	R-CARBON;4.7KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
ER12	2001-000734	R-CARBON;4.7KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
ER13	2001-000734	R-CARBON;4.7KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
FR13	2001-000734	R-CARBON;4.7KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
FR18	2001-000734	R-CARBON;4.7KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
FR3	2001-000734	R-CARBON;4.7KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
FR54	2001-000734	R-CARBON;4.7KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
PR20	2001-000734	R-CARBON;4.7KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
SR5	2001-000734	R-CARBON;4.7KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
DR66	2001-000773	R-CARBON;470KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
AR31	2001-000786	R-CARBON;47KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
AR52	2001-000786	R-CARBON;47KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
AR53	2001-000786	R-CARBON;47KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
AR9	2001-000786	R-CARBON;47KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
DR10	2001-000786	R-CARBON;47KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
DR26	2001-000786	R-CARBON;47KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
DR44	2001-000786	R-CARBON;47KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
DR47	2001-000786	R-CARBON;47KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
DR56	2001-000786	R-CARBON;47KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
DR63	2001-000786	R-CARBON;47KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
DR7	2001-000786	R-CARBON;47KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
FR15	2001-000786	R-CARBON;47KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
FR17	2001-000786	R-CARBON;47KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
FR28	2001-000786	R-CARBON;47KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
FR29	2001-000786	R-CARBON;47KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
FR42	2001-000786	R-CARBON;47KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
FR44	2001-000786	R-CARBON;47KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
FR48	2001-000786	R-CARBON;47KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
FR49	2001-000786	R-CARBON;47KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
FR5	2001-000786	R-CARBON;47KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
FR7	2001-000786	R-CARBON;47KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
PR30	2001-000786	R-CARBON;47KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
PR33	2001-000786	R-CARBON;47KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
SR1	2001-000786	R-CARBON;47KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
DR65	2001-000793	R-CARBON;47OHM,5%,1/8W,AA,TP,1.8X3.2MM	
FR4	2001-000793	R-CARBON;47OHM,5%,1/8W,AA,TP,1.8X3.2MM	
PR24	2001-000793	R-CARBON;47OHM,5%,1/8W,AA,TP,1.8X3.2MM	
DR53	2001-000802	R-CARBON;5.6Kohm,5%,1/8W,AA,TP,1.8x3.2m	
FR46	2001-000802	R-CARBON;5.6Kohm,5%,1/8W,AA,TP,1.8x3.2m	
FR47	2001-000802	R-CARBON;5.6Kohm,5%,1/8W,AA,TP,1.8x3.2m	
AR12	2001-000864	R-CARBON;56KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
AR17	2001-000864	R-CARBON;56KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
AR35	2001-000864	R-CARBON;56KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
AR46	2001-000864	R-CARBON;56KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
DR64	2001-000864	R-CARBON;56KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
FR41	2001-000864	R-CARBON;56KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
FR43	2001-000864	R-CARBON;56KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
DR51	2001-000890	R-CARBON;6.8KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
PR6	2001-000890	R-CARBON;6.8KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
AR13	2001-000924	R-CARBON;680OHM,5%,1/8W,AA,TP,1.8X3.2MM	
AR36	2001-000924	R-CARBON;680OHM,5%,1/8W,AA,TP,1.8X3.2MM	
DR16	2001-000924	R-CARBON;680OHM,5%,1/8W,AA,TP,1.8X3.2MM	
DR45	2001-000924	R-CARBON;680OHM,5%,1/8W,AA,TP,1.8X3.2MM	
OR1	2001-000938	R-CARBON;68OHM,5%,1/8W,AA,TP,1.8X3.2MM	
DR18	2001-000977	R-CARBON;8.2KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
DR74	2001-000977	R-CARBON;8.2KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
AR29	2001-000995	R-CARBON;820OHM,5%,1/8W,AA,TP,1.8X3.2MM	
AR7	2001-000995	R-CARBON;820OHM,5%,1/8W,AA,TP,1.8X3.2MM	
DR2	2001-001006	R-CARBON;82OHM,5%,1/8W,AA,TP,1.8X3.2MM	
DR60	2001-001006	R-CARBON;82OHM,5%,1/8W,AA,TP,1.8X3.2MM	
DR33	2001-001096	R-CARBON(S);2.2OHM,5%,1/2W,AA,TP,2.4X6.4MM	
PR2	2001-001153	R-CARBON(S);47ohm,5%,1/2W,AA,TP,2.4x6.4mm	
PR3	2001-001153	R-CARBON(S);47ohm,5%,1/2W,AA,TP,2.4x6.4mm	
AR26	2003-000468	R-METAL OXIDE(S);10ohm,5%,1W,AA,TP,3.3x9mm	
AR3	2003-000468	R-METAL OXIDE(S);10ohm,5%,1W,AA,TP,3.3x9mm	
PFR1	2003-000542	R-METAL OXIDE(S);1ohm,5%,1W,AA,TP,3.3x9mm	
PR31	2003-000690	R-METAL OXIDE(S);4.7ohm,5%,2W,AA,TP,4x12mm	
PR32	2003-000690	R-METAL OXIDE(S);4.7ohm,5%,2W,AA,TP,4x12mm	
PR1	2003-000765	R-METAL OXIDE(S);680ohm,5%,1W,AA,TP,3.3x9mm	
DVR4	2103-000171	VR-SEMI;10Kohm,30%,1/10W,TOP	
DVR1	2103-000248	VR-SEMI;200KOHM,30%,1/10W,TOP	
DVR2	2103-000248	VR-SEMI;200KOHM,30%,1/10W,TOP	
FC29	2201-000377	C-CERAMIC,DISC;220PF,5%,50V,UJ,TP,8.0X3.0,5	
FC30	2201-000377	C-CERAMIC,DISC;220PF,5%,50V,UJ,TP,8.0X3.0,5	
OC1	2201-000381	C-CERAMIC,DISC;22NF,20%,50V,Y5V,8.0x4.0mm,5mm,TP	
OC4	2201-000483	C-CERAMIC,DISC;33pF,5%,50V,CH,TP,5x3,5	
RC1	2201-000547	C-CERAMIC,DISC;4.7nF,20%,500V,Y5T,TP,8x3,5	
RC2	2201-000547	C-CERAMIC,DISC;4.7nF,20%,500V,Y5T,TP,8x3,5	
FC24	2201-000557	C-CERAMIC,DISC;470pF,10%,50V,SL,TP,8x3,5	
AC12	2201-000653	C-CERAMIC,DISC;68pF,5%,50V,SL,TP,4.0X3.5mm,2.	
AC23	2201-000653	C-CERAMIC,DISC;68pF,5%,50V,SL,TP,4.0X3.5mm,2.	
AC22	2201-000674	C-CERAMIC,DISC;820PF,10%,50V,Y5P,BK,5.0X3.0,2	
AC4	2201-000674	C-CERAMIC,DISC;820PF,10%,50V,Y5P,BK,5.0X3.0,2	
EC14	2202-000148	C-CERAMIC,MLC-AXIAL;12NF,5%,50V,NPO,TP	
DC11	2202-000781	C-CERAMIC,MLC-AXIAL;100pF,10%,50V,Y5P,TP,3.5x19,-	
DC15	2202-000781	C-CERAMIC,MLC-AXIAL;100pF,10%,50V,Y5P,TP,3.5x19,-	
DC42	2202-000781	C-CERAMIC,MLC-AXIAL;100pF,10%,50V,Y5P,TP,3.5x19,-	
DC55	2202-000781	C-CERAMIC,MLC-AXIAL;100pF,10%,50V,Y5P,TP,3.5x19,-	
DC56	2202-000781	C-CERAMIC,MLC-AXIAL;100pF,10%,50V,Y5P,TP,3.5x19,-	
DC9	2202-000781	C-CERAMIC,MLC-AXIAL;100pF,10%,50V,Y5P,TP,3.5x19,-	
FC46	2202-000781	C-CERAMIC,MLC-AXIAL;100pF,10%,50V,Y5P,TP,3.5x19,-	
FC47	2202-000781	C-CERAMIC,MLC-AXIAL;100pF,10%,50V,Y5P,TP,3.5x19,-	
DC28	2202-000796	C-CERAMIC,MLC-AXIAL;1nF,10%,50V,Y5P,TP,3.5x19,-	
DC3	2202-000796	C-CERAMIC,MLC-AXIAL;1nF,10%,50V,Y5P,TP,3.5x19,-	
EC1	2202-000797	C-CERAMIC,MLC-AXIAL;10NF,30%,16V,Y5S,TP,3.5X1.9MM,-	
EC10	2202-000797	C-CERAMIC,MLC-AXIAL;10NF,30%,16V,Y5S,TP,3.5X1.9MM,-	
EC12	2202-000797	C-CERAMIC,MLC-AXIAL;10NF,30%,16V,Y5S,TP,3.5X1.9MM,-	
EC2	2202-000797	C-CERAMIC,MLC-AXIAL;10NF,30%,16V,Y5S,TP,3.5X1.9MM,-	
EC7	2202-000797	C-CERAMIC,MLC-AXIAL;10NF,30%,16V,Y5S,TP,3.5X1.9MM,-	
DC52	2202-000806	C-CERAMIC,MLC-AXIAL;220pF,10%,50V,Y5P,TP,3.5x19,-	
DC53	2202-000806	C-CERAMIC,MLC-AXIAL;220pF,10%,50V,Y5P,TP,3.5x19,-	
FC1	2202-000806	C-CERAMIC,MLC-AXIAL;220pF,10%,50V,Y5P,TP,3.5x19,-	
FC6	2202-000806	C-CERAMIC,MLC-AXIAL;220pF,10%,50V,Y5P,TP,3.5x19,-	
EC11	2202-000809	C-CERAMIC,MLC-AXIAL;3.3NF,20%,16V,Y5R,TP,3.5X19,-	
EC3	2202-000817	C-CERAMIC,MLC-AXIAL;4.7NF,20%,16V,Y5R,TP,3.5X19,-	
DC20	2202-000847	C-CERAMIC,MLC-AXIAL;1,8NF,30%,50V,Y5S,TP,3.5X1.9	
DC21	2202-000847	C-CERAMIC,MLC-AXIAL;1,8NF,30%,50V,Y5S,TP,3.5X1.9	
DC30	2202-000847	C-CERAMIC,MLC-AXIAL;1,8NF,30%,50V,Y5S,TP,3.5X1.9	
DC31	2202-000847	C-CERAMIC,MLC-AXIAL;1,8NF,30%,50V,Y5S,TP,3.5X1.9	
DC57	2202-000854	C-CERAMIC,MLC-AXIAL;47NF,30%,50V,Y5R,TP,3.5X1.9,-	
DC22	2301-000383	C-FILM,PEF;10nF,5%,50V,TP,6x7x3.2mm,5mm	
FC33	2301-000383	C-FILM,PEF;10nF,5%,50V,TP,6x7x3.2mm,5mm	
OC3	2301-000383	C-FILM,PEF;10nF,5%,50V,TP,6x7x3.2mm,5mm	
DC18	2301-000390	C-FILM,PEF;15NF,10%,50V,TP,6.5X9X3.5MM,5M	
DC23	2301-000390	C-FILM,PEF;15NF,10%,50V,TP,6.5X9X3.5MM,5M	
DC35	2301-000390	C-FILM,PEF;15NF,10%,50V,TP,6.5X9X3.5MM,5M	
DC34	2301-000396	C-FILM,PEF;18NF,5%,50V,TP,7X12X4,4MM	
DC8	2301-000396	C-FILM,PEF;18NF,5%,50V,TP,7X12X4,4MM	
DC4	2301-000401	C-FILM,PEF;1NF,5%,50V,TP,5.5X12X3.3MM	
DC44	2301-000401	C-FILM,PEF;1NF,5%,50V,TP,5.5X12X3.3MM	
DC59	2301-000404	C-FILM,PEF;2.2NF,10%,50V,TP,5.5X7X3.2MM,5	
FC10	2301-000412	C-FILM,PEF;22NF,10%,50V,TP,6.5X10.5X4MM,5	
FC12	2301-000412	C-FILM,PEF;22NF,10%,50V,TP,6.5X10.5X4MM,5	
FC13	2301-000412	C-FILM,PEF;22NF,10%,50V,TP,6.5X10.5X4MM,5	
FC38	2301-000419	C-FILM,PEF;27NF,10%,50V,TP,7.5X10.5X4MM,5	

Location no.	Code no.	Description & Specification	Remarks
FC39	2301-000419	C-FILM,PEF;27NF,10%,50V,TP,7.5X10.5X4MM,5	
DC17	2301-000428	C-FILM,PEF;3.9nF,5%,50V,TP,5.5x12x3,3mm	
DC50	2301-000428	C-FILM,PEF;3.9nF,5%,50V,TP,5.5x12x3,3mm	
DC25	2301-000446	C-FILM,PEF;4.7NF,5%,50V,TP,6X12X3,3.5MM	
SC2	2301-000446	C-FILM,PEF;4.7NF,5%,50V,TP,6X12X3,3.5MM	
PC23	2301-000449	C-FILM,PEF;47NF,10%,50V,TP,8X11X4.5MM,5MM	
DC37	2301-000475	C-FILM,PEF;8.2nF,5%,50V,TP,6.5x12x3.5,3.5	
DC5	2301-000475	C-FILM,PEF;8.2nF,5%,50V,TP,6.5x12x3.5,3.5	
AC11	2303-000311	C-FILM,PPF;100NF,5%,100V,TP,10X13.5X4,5MM	
AC8	2303-000311	C-FILM,PPF;100NF,5%,100V,TP,10X13.5X4,5MM	
DC12	2303-000311	C-FILM,PPF;100NF,5%,100V,TP,10X13.5X4,5MM	
DC38	2303-000311	C-FILM,PPF;100NF,5%,100V,TP,10X13.5X4,5MM	
FC22	2303-000311	C-FILM,PPF;100NF,5%,100V,TP,10X13.5X4,5MM	
FC23	2303-000311	C-FILM,PPF;100NF,5%,100V,TP,10X13.5X4,5MM	
FC34	2303-000311	C-FILM,PPF;100NF,5%,100V,TP,10X13.5X4,5MM	
FC35	2303-000311	C-FILM,PPF;100NF,5%,100V,TP,10X13.5X4,5MM	
FC36	2303-000311	C-FILM,PPF;100NF,5%,100V,TP,10X13.5X4,5MM	
FC37	2303-000311	C-FILM,PPF;100NF,5%,100V,TP,10X13.5X4,5MM	
PC11	2303-000311	C-FILM,PPF;100NF,5%,100V,TP,10X13.5X4,5MM	
PC12	2303-000311	C-FILM,PPF;100NF,5%,100V,TP,10X13.5X4,5MM	
PC13	2303-000311	C-FILM,PPF;100NF,5%,100V,TP,10X13.5X4,5MM	
PC3	2401-000230	C-AL;100uF,20%,100V,GP,TP,12.5x20,5	
DC2	2401-000240	C-AL;100uF,20%,10V,GP,TP,5x11,5	
DC36	2401-000240	C-AL;100uF,20%,10V,GP,TP,5x11,5	
OC2	2401-000240	C-AL;100uF,20%,10V,GP,TP,5x11,5	
AC15	2401-000303	C-AL;100uF,20%,25V,GP,TP,6.3x11,5	
AC3	2401-000303	C-AL;100uF,20%,25V,GP,TP,6.3x11,5	
AC14	2401-000357	C-AL;100UF,20%,50V,GP,-,8X11.5,3.5M	
AC17	2401-000357	C-AL;100UF,20%,50V,GP,-,8X11.5,3.5M	
AC18	2401-000357	C-AL;100UF,20%,50V,GP,-,8X11.5,3.5M	
AC5	2401-000357	C-AL;100UF,20%,50V,GP,-,8X11.5,3.5M	
AC6	2401-000357	C-AL;100UF,20%,50V,GP,-,8X11.5,3.5M	
PC4	2401-000357	C-AL;100UF,20%,50V,GP,-,8X11.5,3.5M	
FC40	2401-000438	C-AL;10UF,20%,25V,GP,-,5X11,2MM	
PC6	2401-000475	C-AL;10UF,20%,50V,GP,-,5X11,2MM	
DC51	2401-000795	C-AL;220UF,20%,16V,GP,-,8X11.5,3.5M	
PC15	2401-000795	C-AL;220UF,20%,16V,GP,-,8X11.5,3.5M	
EC8	2401-000907	C-AL;22UF,20%,16V,GP,-,5X11,2MM	
SC1	2401-000907	C-AL;22UF,20%,16V,GP,-,5X11,2MM	
DC13	2401-001019	C-AL;3.3UF,20%,50V,GP,-,5X7,1.5MM	
DC16	2401-001019	C-AL;3.3UF,20%,50V,GP,-,5X7,1.5MM	
DC32	2401-001019	C-AL;3.3UF,20%,50V,GP,-,5X7,1.5MM	
DC41	2401-001019	C-AL;3.3UF,20%,50V,GP,-,5X7,1.5MM	
DC47	2401-001019	C-AL;3.3UF,20%,50V,GP,-,5X7,1.5MM	
DC7	2401-001019	C-AL;3.3UF,20%,50V,GP,-,5X7,1.5MM	
DC1	2401-001080	C-AL;330nF,20%,50V,GP,-,5x11,2mm	
DC45	2401-001080	C-AL;330nF,20%,50V,GP,-,5x11,2mm	
AC25	2401-001538	C-AL;47UF,20%,25V,GP,-,6X11,2.5MM	
AC28	2401-001538	C-AL;47UF,20%,25V,GP,-,6X11,2.5MM	
DC33	2401-001538	C-AL;47UF,20%,25V,GP,-,6X11,2.5MM	
DC6	2401-001538	C-AL;47UF,20%,25V,GP,-,6X11,2.5MM	
PC16	2401-001538	C-AL;47UF,20%,25V,GP,-,6X11,2.5MM	
PC17	2401-001538	C-AL;47UF,20%,25V,GP,-,6X11,2.5MM	
PC19	2401-001538	C-AL;47UF,20%,25V,GP,-,6X11,2.5MM	
PC22	2401-001538	C-AL;47UF,20%,25V,GP,-,6X11,2.5MM	
PC24	2401-001538	C-AL;47UF,20%,25V,GP,-,6X11,2.5MM	
PC7	2401-001538	C-AL;47UF,20%,25V,GP,-,6X11,2.5MM	
PC9	2401-001538	C-AL;47UF,20%,25V,GP,-,6X11,2.5MM	
PC10	2401-001572	C-AL;47UF,20%,50V,GP,-,6.3X11,2.5MM	
PC21	2401-001572	C-AL;47UF,20%,50V,GP,-,6.3X11,2.5MM	
AC19	2401-001887	C-AL;100NF,20%,50V,-,TP,4X7MM,5	
AC2	2401-001887	C-AL;100NF,20%,50V,-,TP,4X7MM,5	
DC24	2401-001895	C-AL;100uF,20%,16V,GP,6.3x11mm,2.5m	
AC13	2401-001912	C-AL;1uF,20%,50V,GP,5x11mm,2mm,BK	
AC7	2401-001912	C-AL;1uF,20%,50V,GP,5x11mm,2mm,BK	
DC54	2401-001912	C-AL;1uF,20%,50V,GP,5x11mm,2mm,BK	
DC58	2401-001912	C-AL;1uF,20%,50V,GP,5x11mm,2mm,BK	
EC4	2401-001912	C-AL;1uF,20%,50V,GP,5x11mm,2mm,BK	
EC9	2401-001912	C-AL;1uF,20%,50V,GP,5x11mm,2mm,BK	
FC11	2401-001912	C-AL;1uF,20%,50V,GP,5x11mm,2mm,BK	
FC43	2401-001912	C-AL;1uF,20%,50V,GP,5x11mm,2mm,BK	
FC9	2401-001912	C-AL;1uF,20%,50V,GP,5x11mm,2mm,BK	
PC4	2401-001912	C-AL;1uF,20%,50V,GP,5x11mm,2mm,BK	
PC1	2401-001943	C-AL;3300UF,20%,50V,GP,BK,25X40MM,1	
AC1	2401-001952	C-AL;4.7UF,20%,50V,-,TP,6.3X7,5	
AC16	2401-001952	C-AL;4.7UF,20%,50V,-,TP,6.3X7,5	
DC40	2401-001952	C-AL;4.7UF,20%,50V,-,TP,6.3X7,5	
FC2	2401-001952	C-AL;4.7UF,20%,50V,-,TP,6.3X7,5	
FC3	2401-001952	C-AL;4.7UF,20%,50V,-,TP,6.3X7,5	
FC4	2401-001952	C-AL;4.7UF,20%,50V,-,TP,6.3X7,5	
FC41	2401-001952	C-AL;4.7UF,20%,50V,-,TP,6.3X7,5	
FC42	2401-001952	C-AL;4.7UF,20%,50V,-,TP,6.3X7,5	
FC45	2401-001952	C-AL;4.7UF,20%,50V,-,TP,6.3X7,5	
FC5	2401-001952	C-AL;4.7UF,20%,50V,-,TP,6.3X7,5	
PC14	2401-001952	C-AL;4.7UF,20%,50V,-,TP,6.3X7,5	
SC3	2401-001965	C-AL;470NF,20%,50V,-,BK,4X7MM,1.5MM	
SC4	2401-001965	C-AL;470NF,20%,50V,-,BK,4X7MM,1.5MM	
DC14	2401-001975	C-AL;47UF,20%,16V,GP,TP,5X11MM,5	
DC43	2401-001975	C-AL;47UF,20%,16V,GP,TP,5X11MM,5	
EC6	2401-001975	C-AL;47UF,20%,16V,GP,TP,5X11MM,5	
FC15	2401-001975	C-AL;47UF,20%,16V,GP,TP,5X11MM,5	
FC16	2401-001975	C-AL;47UF,20%,16V,GP,TP,5X11MM,5	
FC44	2401-001975	C-AL;47UF,20%,16V,GP,TP,5X11MM,5	

Location no.	Code no.	Description & Specification	Remarks
PC8	2401-001975	C-AL;47UF,20%,16V,GP,TP,5X11MM,5	
FC20	2401-001989	C-AL;4.7uF,20%,50V,BP,TP,5x11,5	
FC21	2401-001989	C-AL;4.7uF,20%,50V,BP,TP,5x11,5	
FC7	2401-001994	C-AL;3.3UF,20%,50V,BP,TP,5X11MM,5	
FC8	2401-001994	C-AL;3.3UF,20%,50V,BP,TP,5X11MM,5	
DC10	2401-002180	C-AL;2.2UF,20%,50V,GP,TP,5X11,5MM	
DC39	2401-002180	C-AL;2.2UF,20%,50V,GP,TP,5X11,5MM	
DC48	2401-002180	C-AL;2.2UF,20%,50V,GP,TP,5X11,5MM	
DC49	2401-002180	C-AL;2.2UF,20%,50V,GP,TP,5X11,5MM	
EC5	2401-002180	C-AL;2.2UF,20%,50V,GP,TP,5X11,5MM	
FC25	2401-002180	C-AL;2.2UF,20%,50V,GP,TP,5X11,5MM	
FC26	2401-002180	C-AL;2.2UF,20%,50V,GP,TP,5X11,5MM	
FC27	2401-002180	C-AL;2.2UF,20%,50V,GP,TP,5X11,5MM	
FC28	2401-002180	C-AL;2.2UF,20%,50V,GP,TP,5X11,5MM	
FC31	2401-002180	C-AL;2.2UF,20%,50V,GP,TP,5X11,5MM	
FC32	2401-002180	C-AL;2.2UF,20%,50V,GP,TP,5X11,5MM	
PL1	2701-000116	INDUCTOR-AXIAL;10uH,10%,4.2x9.8mm	
AL3	2701-000298	INDUCTOR-AXIAL;470uH,10%,4.2x9.8mm	
DL3	2701-000298	INDUCTOR-AXIAL;470uH,10%,4.2x9.8mm	
RF1	3602-000147	FUSE-CLIP;250V,7.5A,30MOHM	
RF2	3602-000147	FUSE-CLIP;250V,7.5A,30MOHM	
PQ12	AC14-12001G	IC;KA78L05,T,-	
	AH94-00070A	**ASSY-MANU-PRO LOGIC;MAX932P**	
LD5	0402-000450	DIODE-BRIDGE;PBL403,200V,4.0A,DIP-4	
LIC3	1201-001026	IC-POWER AMP;7265,ZIP,11P,19.6MIL,DUAL,1000	
LIC4	1204-001472	IC AUDIO PROCESSOR;M62463FP,QFP,64P,-,PL	
	2201-000795	C-CERAMIC,DISC;10nF,10%,400V,Y5P,TP,15x10,5	
LC70	2401-001925	C-AL;2200UF,20%,25V,GP,BK,16X26,7.5	
LC71	2401-001925	C-AL;2200UF,20%,25V,GP,BK,16X26,7.5	
LCW3	3711-001018	CONNECTOR-HEADER;BOX,5P,1R,2mm,STRAIGHT,SN	
LCW2	3711-001168	CONNECTOR-HEADER;BOX,9P,1R,2.5MM,STRAIGHT,SN	
LCW1	3711-003107	CONNECTOR-HEADER;BOX,3P,1R,2.5mm,STRAIGHT,SN	
LJACK1	3722-000398	JACK-RCA;3P/2C,3.5MM,SN,BLK,#16~22	
LJACK2	3722-001011	JACK-RCA;2P,3.5MM,NI,BLK,-	
UIC1	AH09-00002A	IC-MICOM MASKING;-,100P,-,-,-	
LL1	AH27-90001A	COIL-SPRING;,2.2UH,-,-,SPRING	
LL2	AH27-90001A	COIL-SPRING;,2.2UH,-,-,SPRING	
	AH39-00004A	LEAD CONNECTOR-ASSY;-,5264,5395,9,250,2547#26	
	AH39-20006G	LEAD-CONNECTOR ASS'Y;51004,5295,5P,300MM,1007#26	
	AH59-00004A	REMOCON—ASSY;-,-,-,22KEY,MAX940,-	
	G3VI	**M;CDP PACK**	
NQ1502	0501-000314	TR-SMALL SIGNAL;KSA812,PNP,150mW,SOT-23,TP,90-	
NIC928	0904-001159	IC-DSP;9286,8BIT,QFP,80P,-,1MHZ,TR,CM	
NIC925	1003-000179	IC-MOTOR DRIVER;KA9258D,SOP,28P,-,SINGLE,-,ST,	
NIC922	1204-001286	IC-ASP;KB9223,QFP,80P,-,PLASTIC,6V,20	
NR109	2007-000282	R-CHIP;100KOHM,5%,1/10W,DA,TP,2012	
NR203	2007-000282	R-CHIP;100KOHM,5%,1/10W,DA,TP,2012	
NR300	2007-000282	R-CHIP;100KOHM,5%,1/10W,DA,TP,2012	
NR57L	2007-000282	R-CHIP;100KOHM,5%,1/10W,DA,TP,2012	
NR57R	2007-000282	R-CHIP;100KOHM,5%,1/10W,DA,TP,2012	
NR606	2007-000282	R-CHIP;100KOHM,5%,1/10W,DA,TP,2012	
NR602	2007-000300	R-CHIP;10KOHM,5%,1/10W,DA,TP,2012	
NR603	2007-000300	R-CHIP;10KOHM,5%,1/10W,DA,TP,2012	
NR104	2007-000338	R-CHIP;120KOHM,5%,1/10W,DA,TP,2012	
NR107	2007-000338	R-CHIP;120KOHM,5%,1/10W,DA,TP,2012	
NR100	2007-000355	R-CHIP;12KOHM,5%,1/10W,DA,TP,2012	
NR120	2007-000355	R-CHIP;12KOHM,5%,1/10W,DA,TP,2012	
NR121	2007-000355	R-CHIP;12KOHM,5%,1/10W,DA,TP,2012	
NR204	2007-000355	R-CHIP;12KOHM,5%,1/10W,DA,TP,2012	
FREE	2007-000395	R-CHIP;150KOHM,5%,1/10W,DA,TP,2012	
NR103	2007-000395	R-CHIP;150KOHM,5%,1/10W,DA,TP,2012	
NR119	2007-000395	R-CHIP;150KOHM,5%,1/10W,DA,TP,2012	
NR400	2007-000409	R-CHIP;15KOHM,5%,1/10W,DA,TP,2012	
NR115	2007-000444	R-CHIP;180KOHM,5%,1/10W,DA,TP,2012	
NR10	2007-000468	R-CHIP;1KOHM,5%,1/10W,DA,TP,2012	
NR11	2007-000468	R-CHIP;1KOHM,5%,1/10W,DA,TP,2012	
NR12	2007-000468	R-CHIP;1KOHM,5%,1/10W,DA,TP,2012	
NR4	2007-000468	R-CHIP;1KOHM,5%,1/10W,DA,TP,2012	
NR5	2007-000468	R-CHIP;1KOHM,5%,1/10W,DA,TP,2012	
NR54L	2007-000468	R-CHIP;1KOHM,5%,1/10W,DA,TP,2012	
NR54R	2007-000468	R-CHIP;1KOHM,5%,1/10W,DA,TP,2012	
NR6	2007-000468	R-CHIP;1KOHM,5%,1/10W,DA,TP,2012	
NR604	2007-000468	R-CHIP;1KOHM,5%,1/10W,DA,TP,2012	
NR7	2007-000468	R-CHIP;1KOHM,5%,1/10W,DA,TP,2012	
NR8	2007-000468	R-CHIP;1KOHM,5%,1/10W,DA,TP,2012	
NR804	2007-000468	R-CHIP;1KOHM,5%,1/10W,DA,TP,2012	
SR3	2007-000468	R-CHIP;1KOHM,5%,1/10W,DA,TP,2012	
SR4	2007-000468	R-CHIP;1KOHM,5%,1/10W,DA,TP,2012	
NR114	2007-000477	R-CHIP;1MOHM,5%,1/10W,DA,TP,2012	
NR50L	2007-000586	R-CHIP;22KOHM,5%,1/10W,DA,TP,2012	
NR50R	2007-000586	R-CHIP;22KOHM,5%,1/10W,DA,TP,2012	
NR101	2007-000593	R-CHIP;22OHM,5%,1/10W,DA,TP,2012	
NR200	2007-000653	R-CHIP;27KOHM,5%,1/10W,DA,TP,2012	
NR52L	2007-000653	R-CHIP;27KOHM,5%,1/10W,DA,TP,2012	
NR52R	2007-000653	R-CHIP;27KOHM,5%,1/10W,DA,TP,2012	
NR201	2007-000686	R-CHIP;3.3KOHM,5%,1/10W,DA,TP,2012	
NR202	2007-000686	R-CHIP;3.3KOHM,5%,1/10W,DA,TP,2012	
NR105	2007-000830	R-CHIP;39KOHM,5%,1/10W,DA,TP,2012	
NR995	2007-000830	R-CHIP;39KOHM,5%,1/10W,DA,TP,2012	
NR996	2007-000830	R-CHIP;39KOHM,5%,1/10W,DA,TP,2012	

Location no.	Code no.	Description & Specification	Remarks
NR997	2007-000830	R-CHIP;39KOHM,5%,1/10W,DA,TP,2012	
NR998	2007-000830	R-CHIP;39KOHM,5%,1/10W,DA,TP,2012	
NR53L	2007-000872	R-CHIP;4.7KOHM,5%,1/10W,DA,TP,2012	
NR53R	2007-000872	R-CHIP;4.7KOHM,5%,1/10W,DA,TP,2012	
NR55L	2007-000872	R-CHIP;4.7KOHM,5%,1/10W,DA,TP,2012	
NR55R	2007-000872	R-CHIP;4.7KOHM,5%,1/10W,DA,TP,2012	
SR2	2007-000872	R-CHIP;4.7KOHM,5%,1/10W,DA,TP,2012	
NR117	2007-000898	R-CHIP;430Kohm,5%,1/10W,DA,TP,2012	
NR108	2007-000941	R-CHIP;47KOHM,5%,1/10W,DA,TP,2012	
NR111	2007-000941	R-CHIP;47KOHM,5%,1/10W,DA,TP,2012	
NR112	2007-001039	R-CHIP;56KOHM,5%,1/10W,DA,TP,2012	
NR116	2007-001195	R-CHIP;820KOHM,5%,1/10W,DA,TP,2012	
NR994	2007-001208	R-CHIP;82KOHM,5%,1/10W,DA,TP,2012	
NR999	2007-001208	R-CHIP;82KOHM,5%,1/10W,DA,TP,2012	
	2007-001216	R-CHIP;82OHM,5%,1/10W,DA,TP,2012	
NC107	2203-000199	C-CERAMIC,CHIP;100nF,79.8,50V,Z5U,TP,2012,-	
NC108	2203-000199	C-CERAMIC,CHIP;100nF,79.8,50V,Z5U,TP,2012,-	
NC119	2203-000199	C-CERAMIC,CHIP;100nF,79.8,50V,Z5U,TP,2012,-	
NC120	2203-000199	C-CERAMIC,CHIP;100nF,79.8,50V,Z5U,TP,2012,-	
NC121	2203-000199	C-CERAMIC,CHIP;100nF,79.8,50V,Z5U,TP,2012,-	
NC600	2203-000199	C-CERAMIC,CHIP;100nF,79.8,50V,Z5U,TP,2012,-	
NC901	2203-000199	C-CERAMIC,CHIP;100nF,79.8,50V,Z5U,TP,2012,-	
NC1	2203-000260	C-CERAMIC,CHIP;10nF,10%,50V,X7R,TP,2012,-	
NC103	2203-000260	C-CERAMIC,CHIP;10nF,10%,50V,X7R,TP,2012,-	
NC112	2203-000260	C-CERAMIC,CHIP;10nF,10%,50V,X7R,TP,2012,-	
NC113	2203-000260	C-CERAMIC,CHIP;10nF,10%,50V,X7R,TP,2012,-	
NC116	2203-000260	C-CERAMIC,CHIP;10nF,10%,50V,X7R,TP,2012,-	
NC205	2203-000260	C-CERAMIC,CHIP;10nF,10%,50V,X7R,TP,2012,-	
NC502	2203-000260	C-CERAMIC,CHIP;10nF,10%,50V,X7R,TP,2012,-	
NC503	2203-000260	C-CERAMIC,CHIP;10nF,10%,50V,X7R,TP,2012,-	
NC504	2203-000260	C-CERAMIC,CHIP;10nF,10%,50V,X7R,TP,2012,-	
NC53L	2203-000260	C-CERAMIC,CHIP;10nF,10%,50V,X7R,TP,2012,-	
NC53R	2203-000260	C-CERAMIC,CHIP;10nF,10%,50V,X7R,TP,2012,-	
NC602	2203-000260	C-CERAMIC,CHIP;10nF,10%,50V,X7R,TP,2012,-	
NC800	2203-000260	C-CERAMIC,CHIP;10nF,10%,50V,X7R,TP,2012,-	
NC804	2203-000260	C-CERAMIC,CHIP;10nF,10%,50V,X7R,TP,2012,-	
NC905	2203-000260	C-CERAMIC,CHIP;10nF,10%,50V,X7R,TP,2012,-	
SC1	2203-000260	C-CERAMIC,CHIP;10nF,10%,50V,X7R,TP,2012,-	
SC2	2203-000260	C-CERAMIC,CHIP;10nF,10%,50V,X7R,TP,2012,-	
SC6	2203-000260	C-CERAMIC,CHIP;10nF,10%,50V,X7R,TP,2012,-	
NC190	2203-000335	C-CERAMIC,CHIP;12pF,5%,50V,NPO,TP,2012,2.0m	
NC117	2203-000477	C-CERAMIC,CHIP;1uF,+80-20%,16V,Y5V,TP,2012,-	
NC110	2203-000495	C-CERAMIC,CHIP;2.2nF,10%,50V,X7R,2012,-,TP	
NC118	2203-000787	C-CERAMIC,CHIP;330pF,5%,50V,NPO,TP,2012,-	
NC101	2203-000802	C-CERAMIC,CHIP;33nF,10%,50V,X7R,TP,2012,-	
NC111	2203-000802	C-CERAMIC,CHIP;33nF,10%,50V,X7R,TP,2012,-	
NC125	2203-000802	C-CERAMIC,CHIP;33nF,10%,50V,X7R,TP,2012,-	
NC100	2203-000892	C-CERAMIC,CHIP;4.7NF,10%,50V,X7R,TP,2012,-	
NC106	2203-000892	C-CERAMIC,CHIP;4.7NF,10%,50V,X7R,TP,2012,-	
NC124	2203-000919	C-CERAMIC,CHIP;470nF,+80-20%,16V,Y5V,TP,2012,	
NC204	2203-000919	C-CERAMIC,CHIP;470nF,+80-20%,16V,Y5V,TP,2012,	
NC200	2203-000979	C-CERAMIC,CHIP;47nF,10%,50V,X7R,TP,2012,-	
NC115	2203-001137	C-CERAMIC,CHIP;68nF,+80-20%,50V,Y5V,TP,2012,-	
NC104	2203-001537	C-CERAMIC,CHIP;1NF,10%,50V,X7R,TP,2012,-	
NC52L	2203-001537	C-CERAMIC,CHIP;1NF,10%,50V,X7R,TP,2012,-	
NC52R	2203-001537	C-CERAMIC,CHIP;1NF,10%,50V,X7R,TP,2012,-	
NC603	2203-001537	C-CERAMIC,CHIP;1NF,10%,50V,X7R,TP,2012,-	
NC903	2203-001537	C-CERAMIC,CHIP;1NF,10%,50V,X7R,TP,2012,-	
NC102	2203-001551	C-CERAMIC,CHIP;1.5NF,10%,50V,X7R,TP,2012,2MM	
NC201	2203-001551	C-CERAMIC,CHIP;1.5NF,10%,50V,X7R,TP,2012,2MM	
NC202	2203-001619	C-CERAMIC,CHIP;27PF,5%,50V,NPO,TP,2012,2MM	
NC203	2203-001619	C-CERAMIC,CHIP;27PF,5%,50V,NPO,TP,2012,2MM	
NL105	3301-000325	CORE-FERRITE BEAD;AB,3.2x2.5x1.3mm,-,-	
SIC1	1003-001162	IC-MOTOR DRIVER;KA3082,SIP,10PIN,25MIL,DOUBLE,	
SIC2	1003-001162	IC-MOTOR DRIVER;KA3082,SIP,10PIN,25MIL,DOUBLE,	
NXF100	2802-000211	RESONATOR-CERAMIC;16.93MHZ,0.5%,TP,10.0X5.0X10.0	
SCW5	3708-001131	CONNECTOR-FPC/FC/PIC;5P,1.25mm,STRAIGHT,SN	
NCW100	3708-001312	CONNECTOR-FPC/FC/PIC;16P,1mm,STRAIGHT,SN	
	3711-000906	CONNECTOR-HEADER;BOX,3P,1R,2mm,ANGLE,SN	
SCW1	3711-002579	CONNECTOR-HEADER;WALL,22P,1R,2.5MM,ANGLE,	
SCW7	3711-003379	CONNECTOR-HEADER;NOWALL,3P,1R,2.5MM,STRAIGHT,SN	
NCW101	AH39-20025S	LEAD-CONNECTOR,ASSY;-,51004-08,35023-08,8P,300MM,1	
NCW102	AH39-20561P	LEAD CONNECTOR-ASSY;-,5295,PHR,6P,150mm,1007#28	
ND200	0401-000101	DIODE-SWITCHING;1N4148,100V,200mA,DO-35,TP	
ND201	0401-000101	DIODE-SWITCHING;1N4148,100V,200mA,DO-35,TP	
ND202	0401-000101	DIODE-SWITCHING;1N4148,100V,200mA,DO-35,TP	
ND203	0401-000101	DIODE-SWITCHING;1N4148,100V,200mA,DO-35,TP	
SZD1	0403-000352	DIODE-ZENER;UZ4.7BM,4.7V,4.4-5.0V,500MW,DO	
SZD2	0403-000361	DIODE-ZENER;UZ6.2BSB,6.2V,5.99-6.24V,50	
NQ1501	0501-000610	TR-SMALL SIGNAL;KSA928A-Y,PNP,1W,TO-92L,TP,160	
SR1	2001-000027	R-CARBON;100OHM,5%,1/4W,AA,TP,2.4X6.4MM	
NR106	2001-000319	R-CARBON;120KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
NR1	2001-000429	R-CARBON;1KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
NR2	2001-000429	R-CARBON;1KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
NR3	2001-000429	R-CARBON;1KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
NR113	2001-000977	R-CARBON;8.2KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
NR555	2008-000141	R-FUSIBLE;2.2ohm,5%,1/4W,AA,TP,2.6x6.7mm	
NC400	2202-000243	C-CERAMIC,MLC-AXIAL;33PF,5%,50V,SL,3.5X19,-,TP	
NC300	2202-000796	C-CERAMIC,MLC-AXIAL;1nF,10%,50V,Y5P,TP,3.5x19,-	
NC117	2301-000389	C-FILM,PEF;150nF,5%,50V,TP,12.5x15x7.5,7m	
NC105	2401-000240	C-AL;100uF,20%,10V,GP,TP,5x11,5	
NC501	2401-000240	C-AL;100uF,20%,10V,GP,TP,5x11,5	
NC702	2401-000240	C-AL;100uF,20%,10V,GP,TP,5x11,5	
NC904	2401-000240	C-AL;100uF,20%,10V,GP,TP,5x11,5	
SC14	2401-000240	C-AL;100uF,20%,10V,GP,TP,5x11,5	
NC114	2401-000419	C-AL;10UF,20%,16V,GP,-,4X7,5	
NC301	2401-000778	C-AL;220uF,20%,10V,GP,6.3x11,2.5mm,	
NC700	2401-000778	C-AL;220uF,20%,10V,GP,6.3x11,2.5mm,	
NC701	2401-000778	C-AL;220uF,20%,10V,GP,6.3x11,2.5mm,	
SC5	2401-000795	C-AL;220UF,20%,16V,GP,-,8X11.5,3.5M	
NC703	2401-001102	C-AL;330UF,20%,16V,GP,TP,8X12,5	
NC122	2401-001952	C-AL;4.7UF,20%,50V,-,TP,6.3X7,5	
NC50L	2401-001952	C-AL;4.7UF,20%,50V,-,TP,6.3X7,5	
NC50R	2401-001952	C-AL;4.7UF,20%,50V,-,TP,6.3X7,5	
NC54	2401-001952	C-AL;4.7UF,20%,50V,-,TP,6.3X7,5	
NC55L	2401-001952	C-AL;4.7UF,20%,50V,-,TP,6.3X7,5	
NC55R	2401-001952	C-AL;4.7UF,20%,50V,-,TP,6.3X7,5	
NL101	2701-000111	INDUCTOR-AXIAL;100uH,10%,2.5x3.4mm	
NL102	2701-000111	INDUCTOR-AXIAL;100uH,10%,2.5x3.4mm	
NL100	2701-000114	INDUCTOR-AXIAL;10uH,10%,2.5x3.4mm	
SL1	2701-000179	INDUCTOR-AXIAL;33uH,10%,4.2x9.8mm	
NL300	3301-000297	CORE-FERRITE BEAD;AA,3.6X1.2X5.7MM,1400,2900G	
NL301	3301-000297	CORE-FERRITE BEAD;AA,3.6X1.2X5.7MM,1400,2900G	
NL302	3301-000297	CORE-FERRITE BEAD;AA,3.6X1.2X5.7MM,1400,2900G	
NIC05	AC14-12001G	IC;KA78L05,T,-	
SCO4	AC14-12001G	IC;KA78L05,T,-	
	AJ59-20150T	DECK-CDP;CMS-300,-,-,-,-	

4. Block Diagram

4-1 Main Part(COMMON)

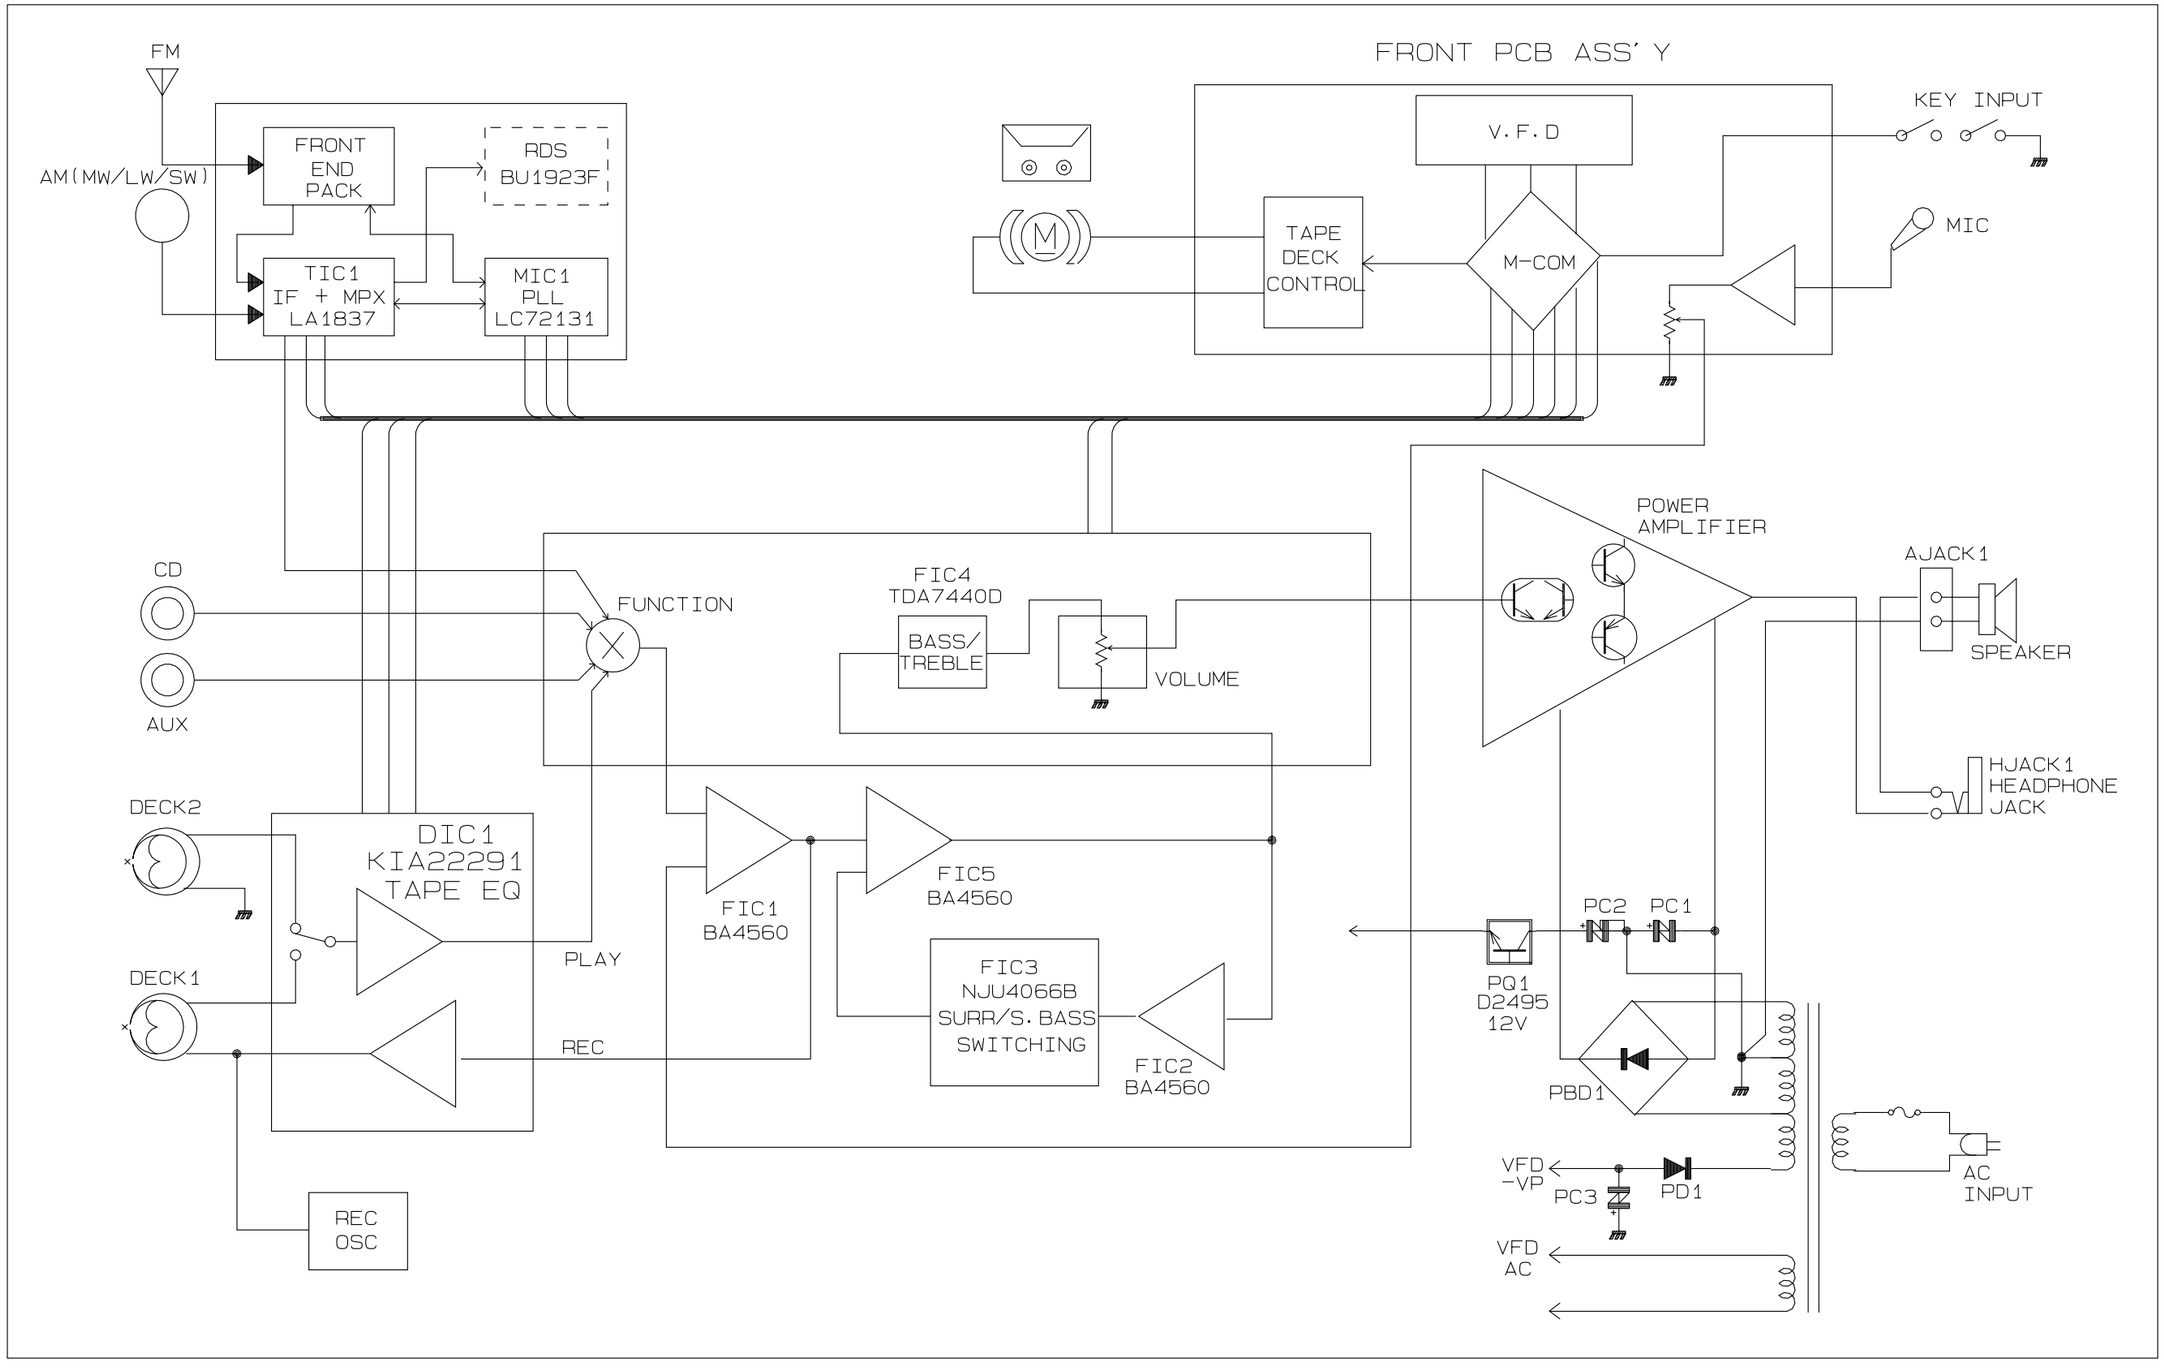

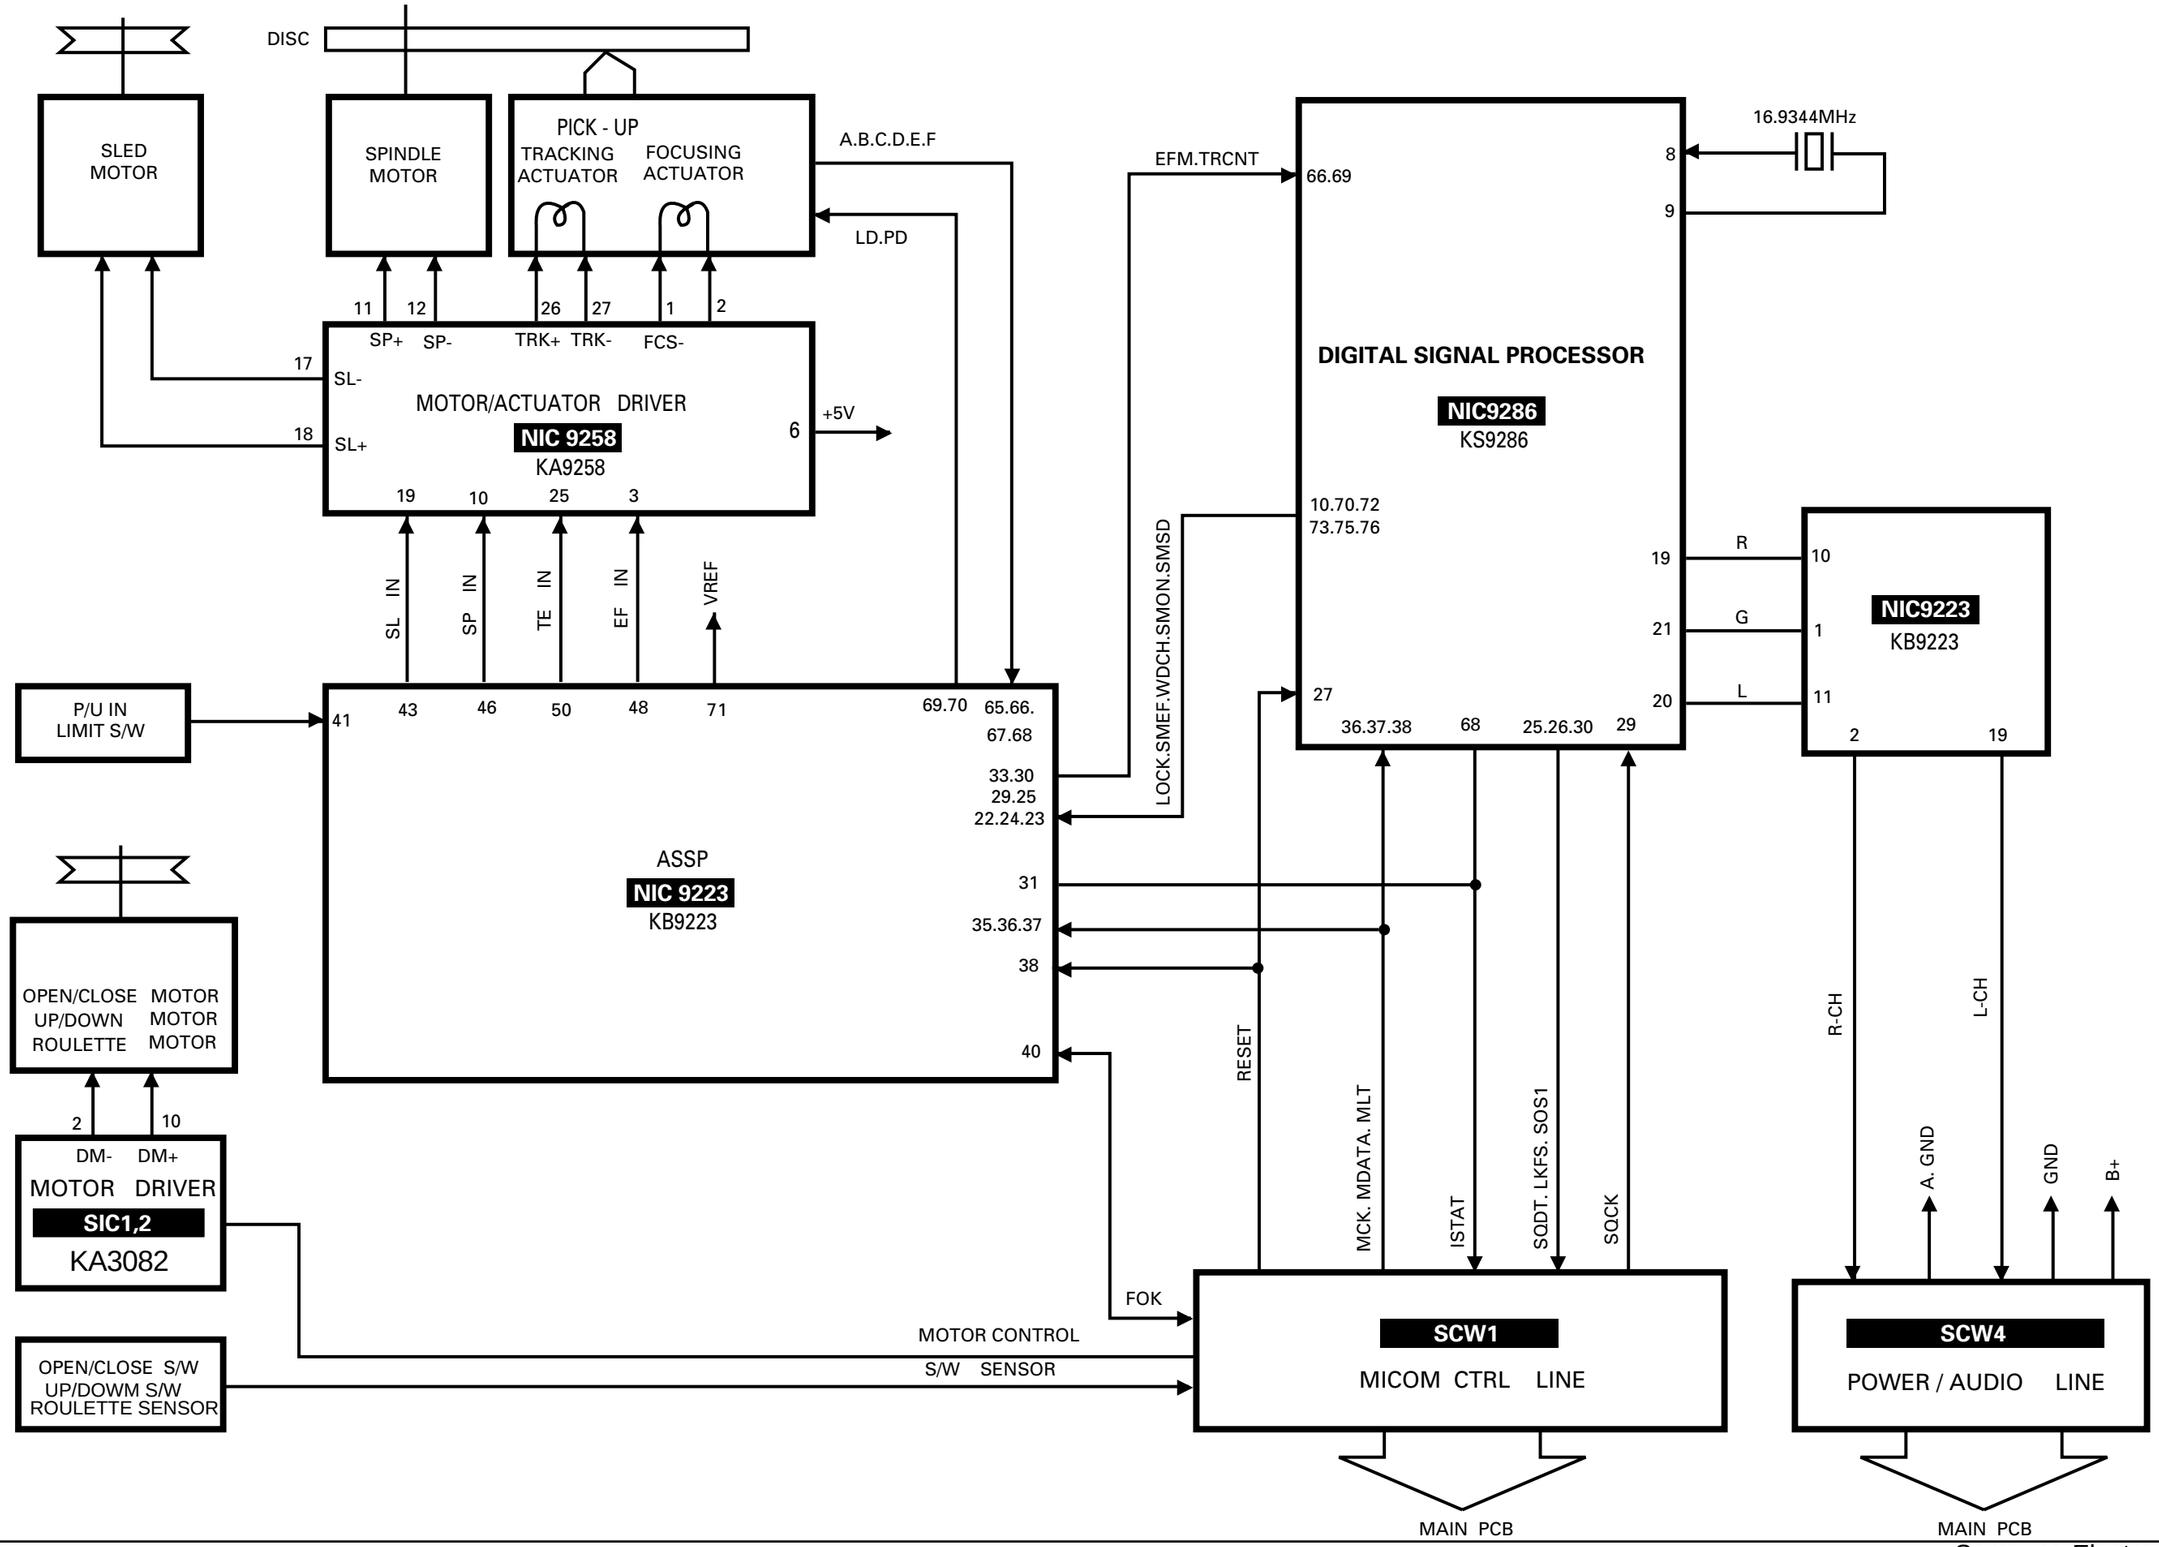
DISC
SLED MOTOR
SPINDLE MOTOR
PICK - UP
TRACKING ACTUATOR
FOCUSING ACTUATOR
A.B.C.D.E.F
LD.PD
11 12 26 27 1 2
SP+ SP- TRK+ TRK- FCS-
17
SL-
18
SL+
MOTOR/ACTUATOR DRIVER
NIC 9258
KA9258
6
+5V
19 10 25 3
SL IN
SP IN
TE IN
EF IN
VREF
P/U IN LIMIT S/W
41
43 46 50 48 71
69.70 65.66. 67.68
33.30 29.25 22.24.23
ASSP
NIC 9223
KB9223
31
35.36.37
38
40
EFM.TRCNT
LOCK.SMEF.WDCH.SMON.SMSD
RESET
MCK. MDATA. MLT
ISTAT
SQDT. LKFS. SOS1
SQCK
66.69
8
9
16.9344MHz
DIGITAL SIGNAL PROCESSOR
NIC9286
KS9286
10.70.72
73.75.76
19
21
27
20
R
G
L
36.37.38
68
25.26.30
29
10
1
11
2
19
NIC9223
KB9223
R-CH
L-CH
A. GND
GND
B+
OPEN/CLOSE MOTOR
UP/DOWN MOTOR
ROULETTE MOTOR
2
10
DM- DM+
MOTOR DRIVER
SIC1,2
KA3082
OPEN/CLOSE S/W
UP/DOWM S/W
ROULETTE SENSOR
FOK
MOTOR CONTROL
S/W SENSOR
SCW1
MICOM CTRL LINE
SCW4
POWER / AUDIO LINE
MAIN PCB
MAIN PCB

5. Printed Circuit Board Diagram

5-1 MAIN(COMMON)

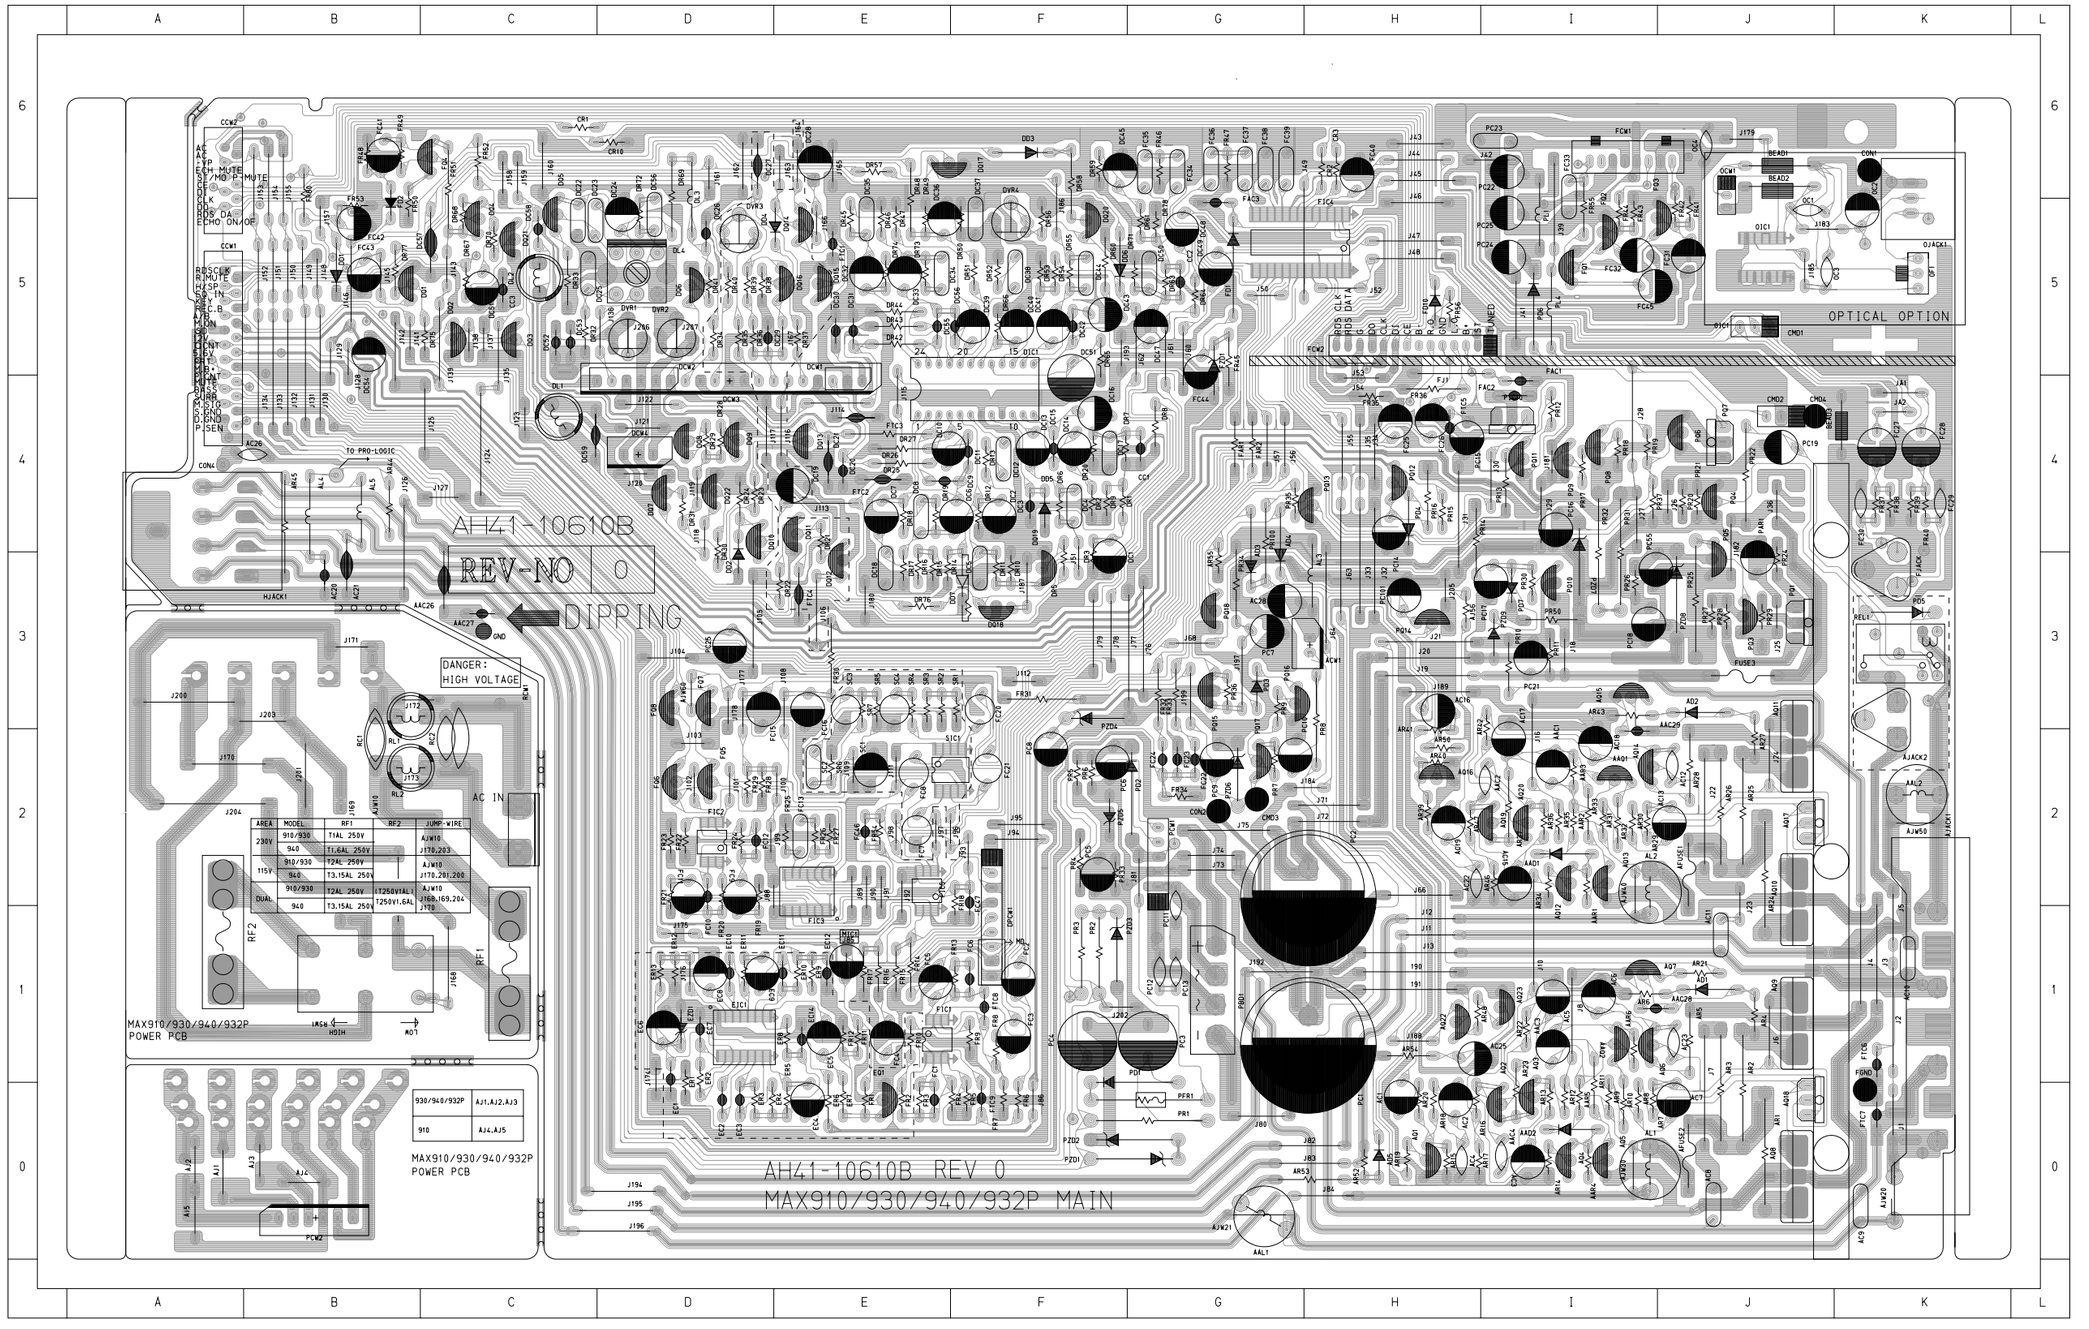

AREA	MODEL	RF1	RF2	JUMP-WIRE
230V	910/930	T1.6AL 250V		AJW10
	940	T1.6AL 250V		J170,203
115V	910/930	T2AL 250V		AJW10
	940	T3.15AL 250V		J170,201,200
DUAL	910/930	T2AL 250V	T1250VTAL1	AJW10
	940	T3.15AL 250V	T250V1.6AL	J169,169,204

930/940/932P	AJ1,AJ2,AJ3
910	AJ4,AJ5

*** DIODE ***

AAD1 (I2)
AAD2 (I0)
AD1 (J1)
AD2 (J3)
AD3 (G3)
AD4 (G3)
AD5 (H0)
DD1 (B5)
DD2 (D4)
DD3 (F6)
DD4 (E5)
DD5 (F4)
DD6 (F5)
DD7 (F3)
EZD1 (D1)
FD1 (G5)
FD10 (H5)
FD2 (B5)
FZD1 (G5)
PD1 (F1)
PD2 (G2)
PD3 (G3)
PD4 (H4)
PD5 (K3)
PD6 (I5)
PD7 (I3)
PZD1 (G0)
PZD2 (F0)
PZD3 (F1)
PZD4 (F3)
PZD5 (F2)
PZD6 (G2)
PZD7 (I4)
PZD8 (J4)
PZD9 (I3)

*** IC&WAFER ***

ACW1 (H3)
CMD1 (J5)
CMD2 (J4)
DCW3 (D4)
DCW4 (D4)
DPCW1 (F1)
FCW1 (I6)
FCW2 (H5)
OCW1 (J6)
PCW1 (G2)
PCW2 (B0)

5-2 FRONT(Only MAX929/930/936/938/939/940/932p/942p)

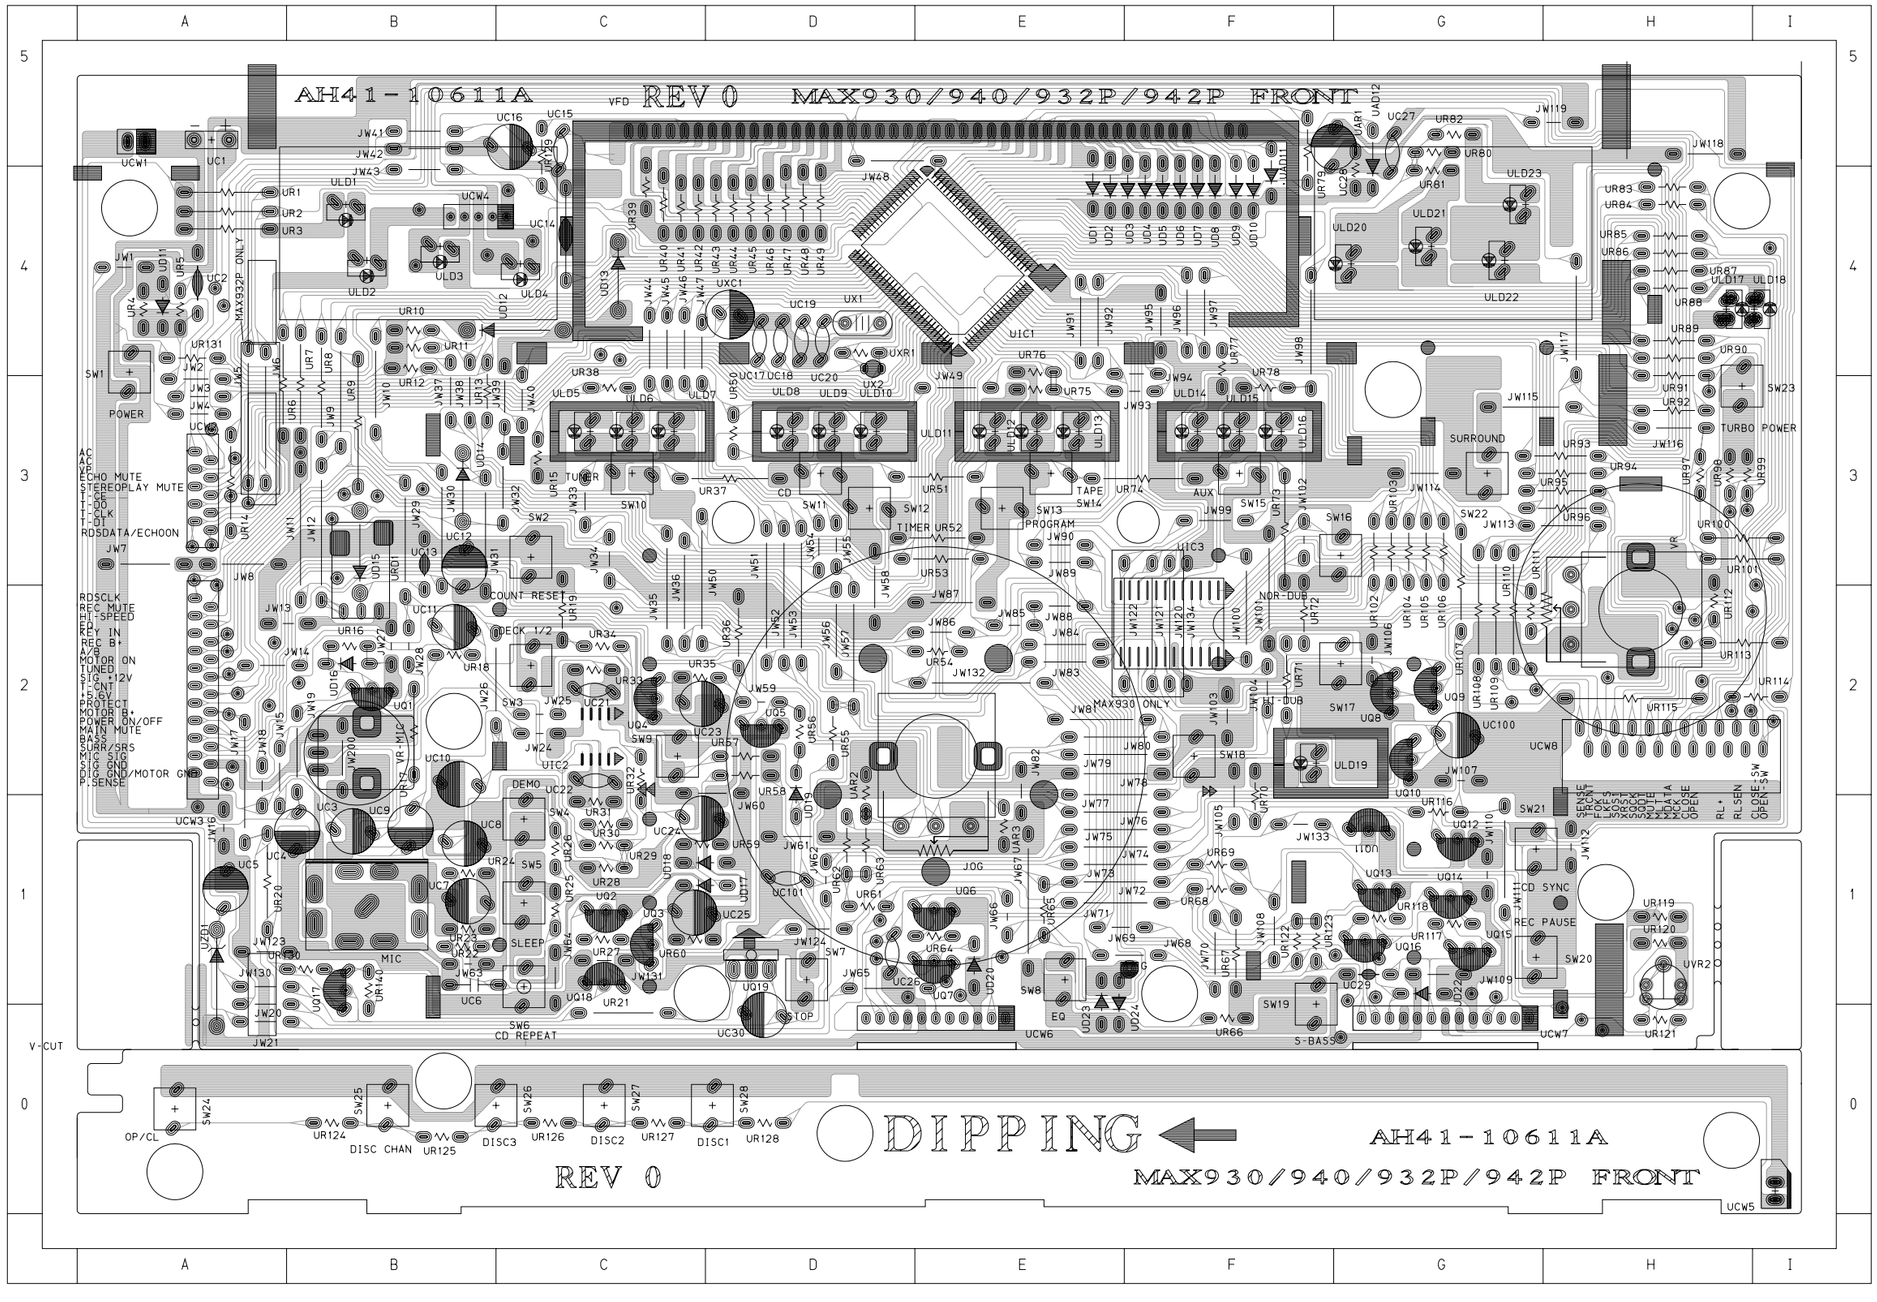

*** CONDENSER ***

UC10 (B2)
UC100 (G2)
UC101 (D1)
UC11 (B2)
UC12 (B3)
UC13 (B2)
UC14 (C4)
UC15 (C4)
UC16 (B5)
UC17 (D4)
UC18 (D4)
UC19 (D4)
UC2 (A4)
UC20 (D4)
UC21 (C2)
UC22 (C2)
UC23 (C2)
UC24 (C1)
UC25 (C1)
UC26 (D1)
UC27 (G4)
UC28 (G5)
UC29 (G1)
UC3 (B1)
UC30 (D0)
UC4 (B1)
UC5 (A1)
UC7 (B1)
UC8 (B1)
UC9 (B1)
UXC1 (D4)

*** DIODE ***

UAD11 (F4)
UAD12 (G4)
UD1 (E4)
UD10 (F4)
UD11 (A4)
UD12 (B4)
UD13 (C4)
UD14 (B3)
UD15 (B2)
UD16 (B2)
UD17 (C1)
UD18 (C1)
UD19 (D2)
UD2 (E4)
UD20 (E1)
UD22 (G1)
UD23 (E1)
UD24 (E0)
UD3 (F4)
UD4 (F4)
UD5 (F4)
UD6 (F4)
UD7 (F4)
UD8 (F4)
UD9 (F4)
UZD1 (A1)

*** TR ***

UQ1 (B2)
UQ10 (G2)
UQ11 (G1)
UQ12 (G1)
UQ13 (G1)
UQ14 (G1)
UQ15 (G1)
UQ16 (G1)
UQ17 (B0)
UQ18 (C1)
UQ2 (C1)
UQ3 (C1)
UQ4 (C2)
UQ5 (D2)
UQ6 (E1)
UQ7 (E1)
UQ8 (G2)
UQ9 (G2)

*** IC&WAFER ***

SW1 (A4)
SW10 (C3)
SW11 (D3)
SW12 (D3)
SW13 (E3)
SW14 (E3)
SW15 (F3)
SW16 (G3)
SW17 (G2)
SW18 (F2)
SW19 (F1)
SW2 (C3)
SW20 (G1)
SW21 (G1)
SW22 (G3)
SW23 (H3)
SW24 (A0)
SW25 (B0)
SW26 (C0)
SW27 (C0)
SW28 (D0)
SW3 (C2)
SW4 (C1)
SW5 (C1)
SW6 (C1)
SW7 (D1)
SW8 (E1)
SW9 (C2)
UC1 (A5)
UCW1 (A5)
UCW4 (B4)
UCW5 (I0)
UCW6 (E0)
UCW7 (G0)
UIC1 (E4)

5-3 FRONT(Only MAX909/910/916)

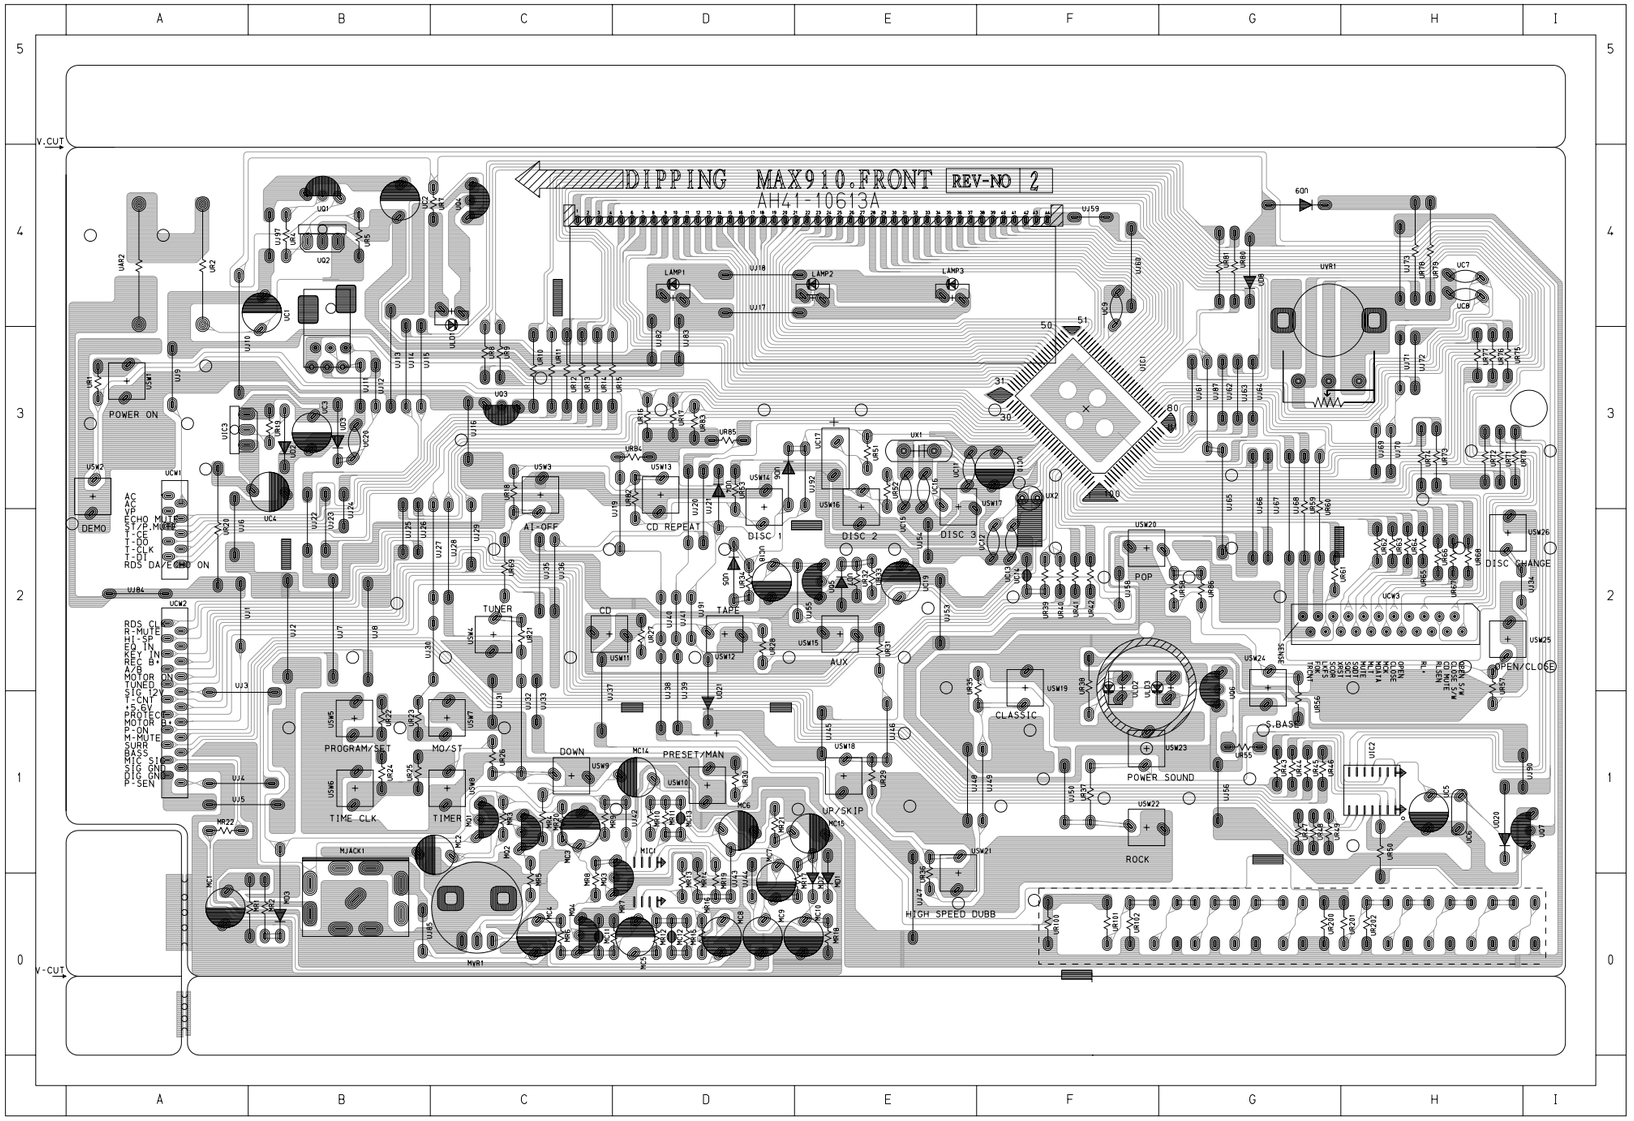

*** CONDENSER ***

MC1 (A0)
MC10 (E0)
MC11 (C0)
MC12 (D0)
MC13 (D1)
MC14 (D1)
MC15 (E1)
MC2 (C1)
MC3 (C1)
MC4 (C0)
MC5 (D0)
MC6 (D1)
MC7 (D1)
MC8 (D0)
MC9 (D0)
UC1 (B3)
UC10 (F3)
UC11 (E3)
UC12 (F2)
UC13 (F2)
UC14 (F2)
UC15 (E3)
UC16 (E3)
UC17 (E3)
UC18 (D2)
UC19 (E2)
UC2 (B4)
UC20 (B3)
UC3 (B3)
UC4 (B3)
UC5 (H1)
UC6 (H1)
UC7 (H4)
UC8 (H4)
UC9 (F4)

*** DIODE ***

MD1 (E0)
MD2 (E0)
MD3 (B0)
UD2 (B3)
UD20 (H1)
UD21 (D1)
UD3 (B3)
UD4 (D3)
UD5 (D2)
UD6 (D3)
UD7 (E2)
UD8 (G4)
UD9 (G4)

*** TR ***

MQ1 (C1)
MQ2 (C1)
MQ3 (D1)
MQ4 (C0)
UQ1 (B4)
UQ3 (C3)
UQ4 (C4)
UQ5 (E2)
UQ6 (G1)
UQ7 (I1)

*** IC&WAFER ***

USW1 (A3)
USW10 (D1)
USW11 (C2)
USW12 (D2)
USW13 (D3)
USW14 (D3)
USW15 (E2)
USW16 (E3)
USW17 (E3)
USW18 (E1)
USW19 (F2)
USW2 (A3)
USW20 (F2)
USW21 (E1)
USW22 (F1)
USW23 (F1)
USW24 (G2)
USW25 (H2)
USW26 (H2)
USW3 (C3)
USW4 (C2)
USW5 (B1)
USW6 (B1)
USW7 (C1)
USW8 (C1)
USW9 (C1)

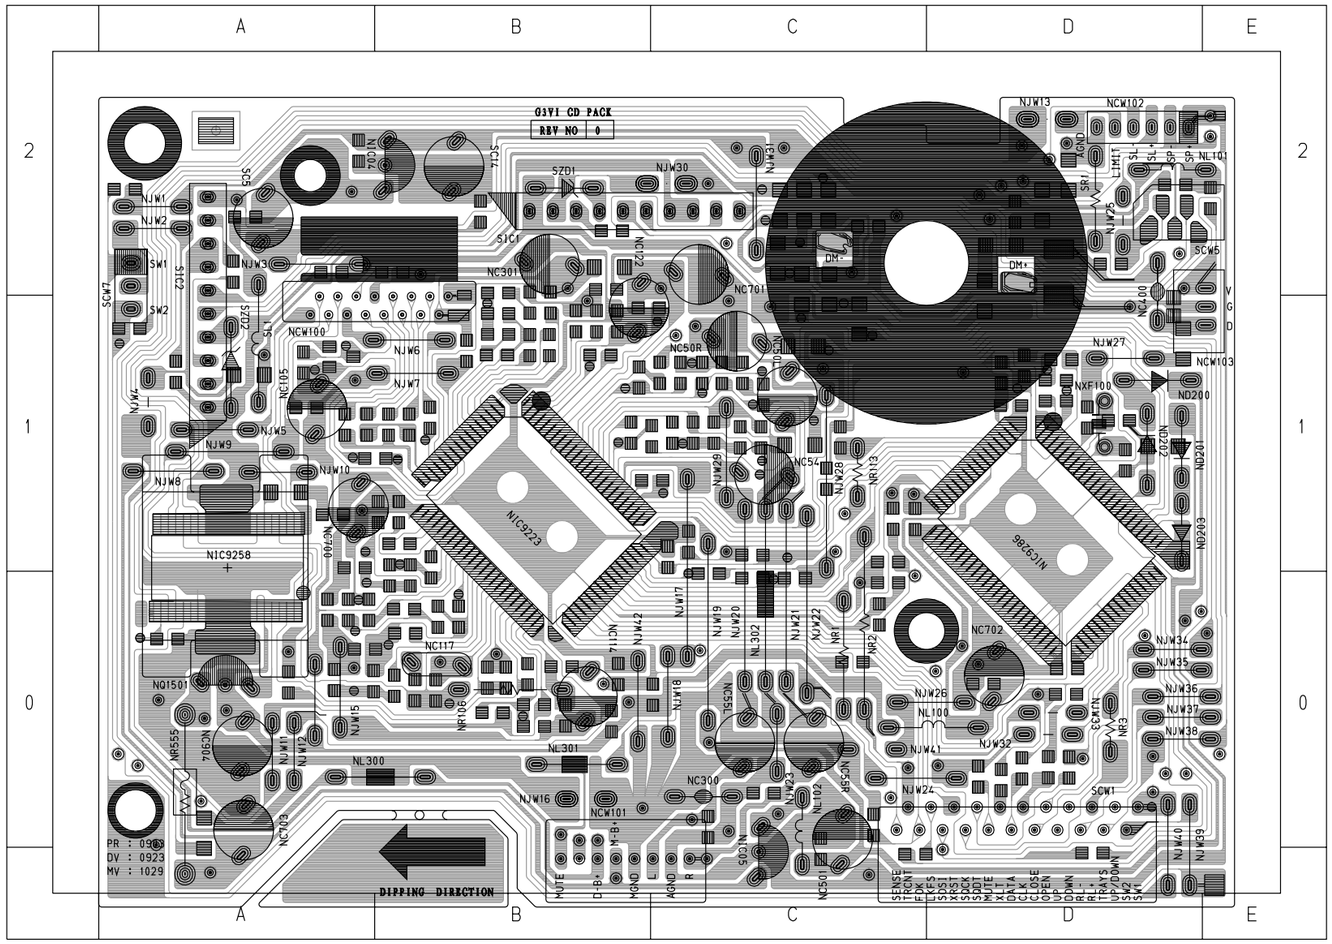
A
B
C
D
E
2
1
0
G3V1 CD PACK
REV NO 0
SZD1
NJW30
NJW13
NCW102
NJW1
NJW2
NJW3
SW1
SW2
SCW2
SIC1
SIC2
NC301
NC702
NC701
NCW100
NJW6
NJW7
NJW5
NJW9
NJW10
NJW8
NC105
NC50R
NJW27
NCW103
NXF100
ND200
ND202
NC54
NJW28
NR13
NIC9223
NIC9258
NIC9286
NC117
NJW42
NJW17
NJW19
NJW20
NJW21
NJW22
NJW23
NJW24
NJW25
NJW26
NJW32
NJW33
NJW34
NJW35
NJW36
NJW37
NJW38
NJW39
NJW40
NJW41
NJW18
NJW16
NQ1501
NR555
NC703
NC904
NL300
NL301
NL100
NL1501
NC300
NCW101
NC501
NC503
SCW1
SCW5
SCW7
SC5
NC400
NC700
NC703
NC904
NC1501
NC1502
NC1503
NC1504
NC1505
NC1506
NC1507
NC1508
NC1509
NC1510
NC1511
NC1512
NC1513
NC1514
NC1515
NC1516
NC1517
NC1518
NC1519
NC1520
NC1521
NC1522
NC1523
NC1524
NC1525
NC1526
NC1527
NC1528
NC1529
NC1530
NC1531
NC1532
NC1533
NC1534
NC1535
NC1536
NC1537
NC1538
NC1539
NC1540

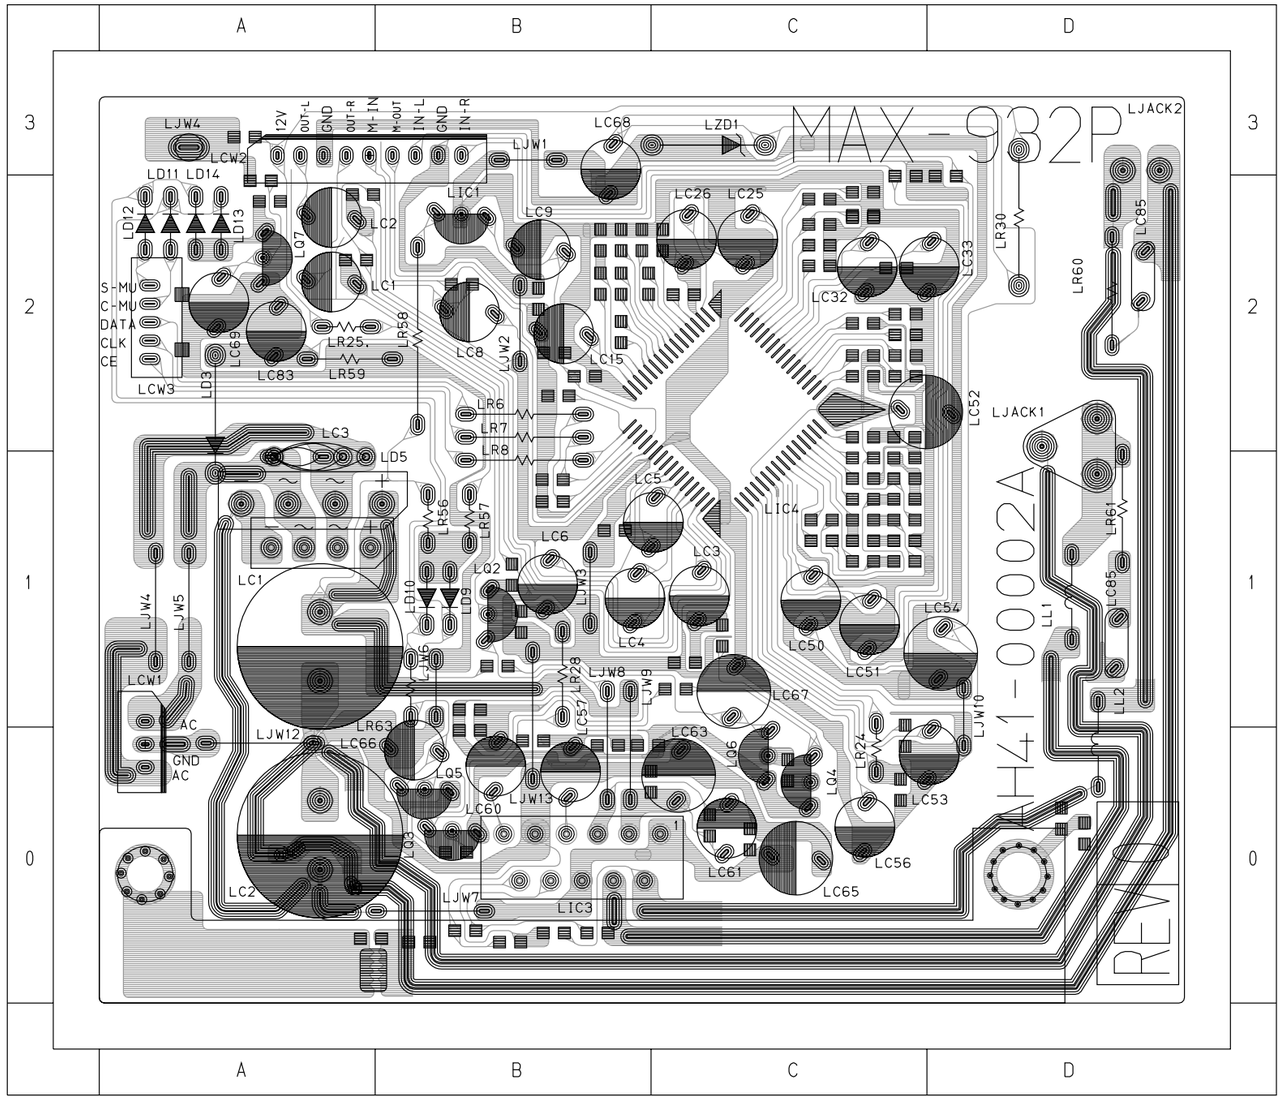

*** CONDENSER ***

* (C1)
LC1 (A2)
LC15 (B2)
LC2 (A2)
LC25 (C2)
LC26 (C2)
LC3 (C1)
LC32 (C2)
LC33 (D2)
LC4 (B1)
LC5 (C1)
LC50 (C1)
LC51 (C1)
LC52 (C2)
LC53 (D0)
LC54 (D1)
LC56 (C0)
LC57 (B0)
LC6 (B1)
LC60 (B0)
LC61 (C0)
LC65 (C0)
LC66 (B0)
LC67 (C0)
LC68 (B3)
LC69 (A2)
LC8 (B2)
LC83 (A2)
LC85 (D1)
LC85 (D2)
LC9 (B2)

*** DIODE ***

LD10 (B1)
LD11 (A2)
LD12 (A2)
LD13 (A2)
LD14 (A2)
LD3 (A1)
LD9 (B1)
LZD1 (C3)

*** TR ***

LIC1 (B2)
LQ2 (B1)
LQ3 (B0)
LQ4 (C0)
LQ5 (B0)
LQ6 (C0)
LQ7 (A2)

*** IC&WAFER ***

LCW1 (A0)
LCW2 (A3)
LCW3 (A2)

5-6 Tuner Parts(COMMON)

5-6-1 LW Band

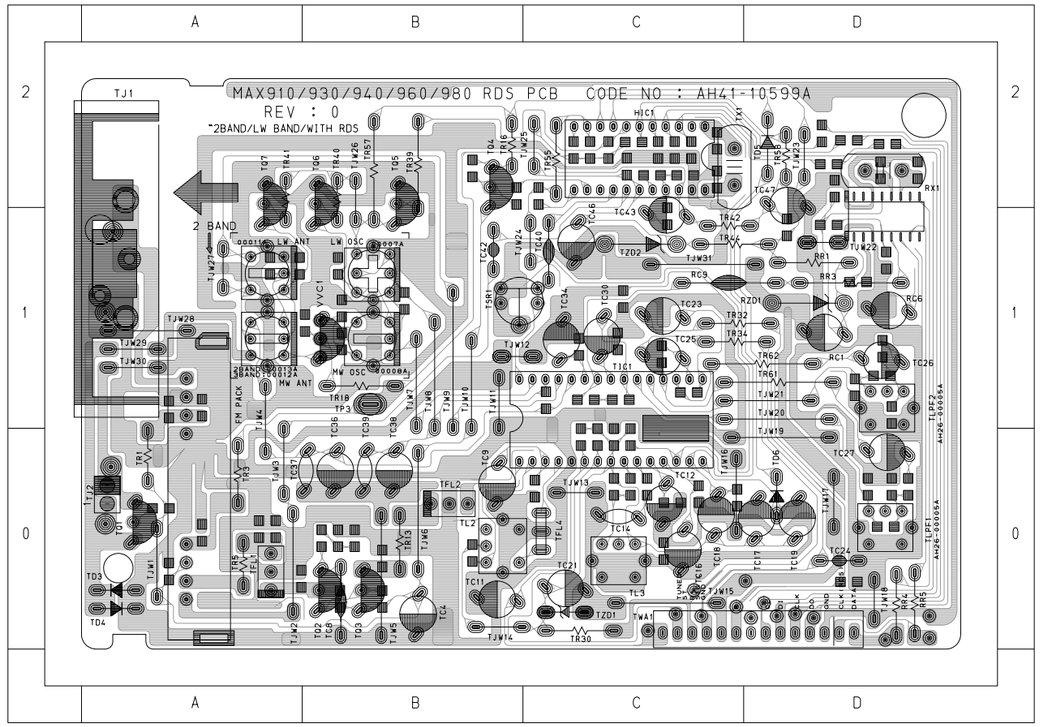

*** CONDENSER ***

RC9 (C1)
TC14 (C0)
TC24 (D0)
TC37 (B0)
TC39 (B0)
TC40 (C1)
TC42 (B1)
TC8 (B0)

*** DIODE ***

RZD1 (D1)
TD3 (A0)
TD4 (A0)
TD5 (D2)
TD6 (D0)
TZD1 (C0)
TZD2 (C1)

*** TR ***

TQ1 (A0)
TQ2 (B0)
TQ3 (B0)
TQ4 (B2)
TQ5 (B2)
TQ6 (B2)
TQ7 (A2)
VVC1 (B1)

*** IC&WAFER ***

TFL4 (C0)
TJ2 (A0)

5-6-2 SW Band

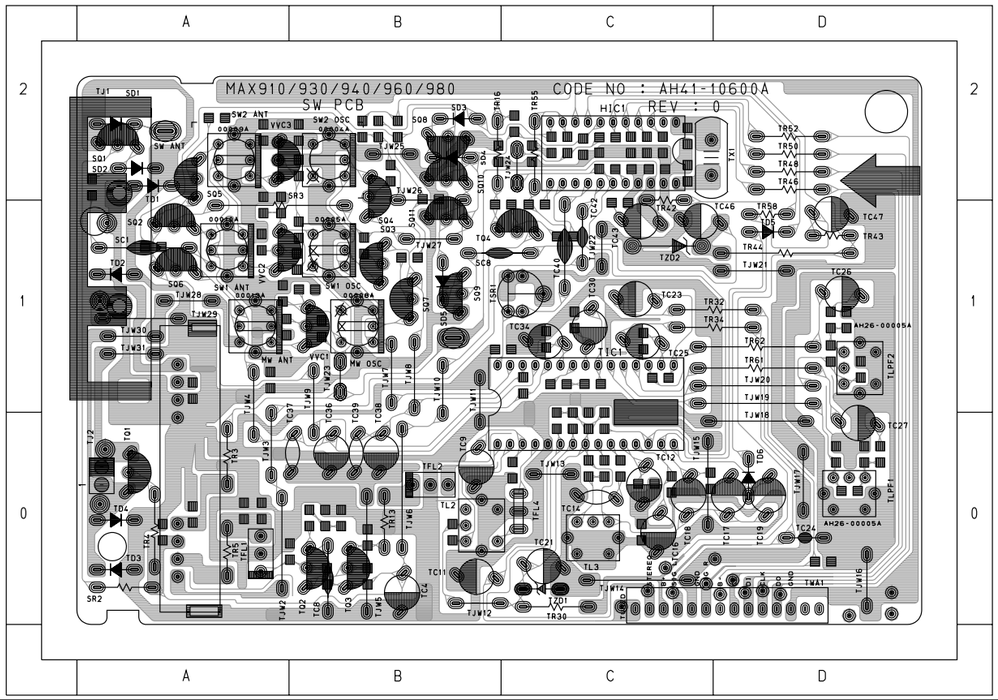

*** CONDENSER ***

SC1 (A1)
SC8 (B1)
TC14 (C0)
TC24 (D0)
TC37 (B0)
TC39 (B0)
TC40 (C1)
TC42 (C1)
TC8 (B0)

*** DIODE ***

SD1 (A2)
SD2 (A2)
SD3 (B2)
SD4 (B2)
SD5 (B1)
TD1 (A2)
TD2 (A1)
TD3 (A0)
TD4 (A0)
TD5 (D1)
TD6 (D0)
TZD1 (C0)
TZD2 (C1)

*** TR ***

SQ1 (A2)
SQ10 (B2)
SQ11 (B1)
SQ2 (A1)
SQ3 (B1)
SQ4 (B2)
SQ5 (A2)
SQ6 (A1)
SQ7 (B1)
SQ8 (B2)
SQ9 (B1)
TQ1 (A0)
TQ2 (B0)
TQ3 (B0)
TQ4 (B1)
VVC1 (B1)
VVC2 (A1)
VVC3 (A2)

*** IC&WAFER ***

TFL4 (C0)
TJ2 (A0)

6. Wiring Diagram(COMMON)

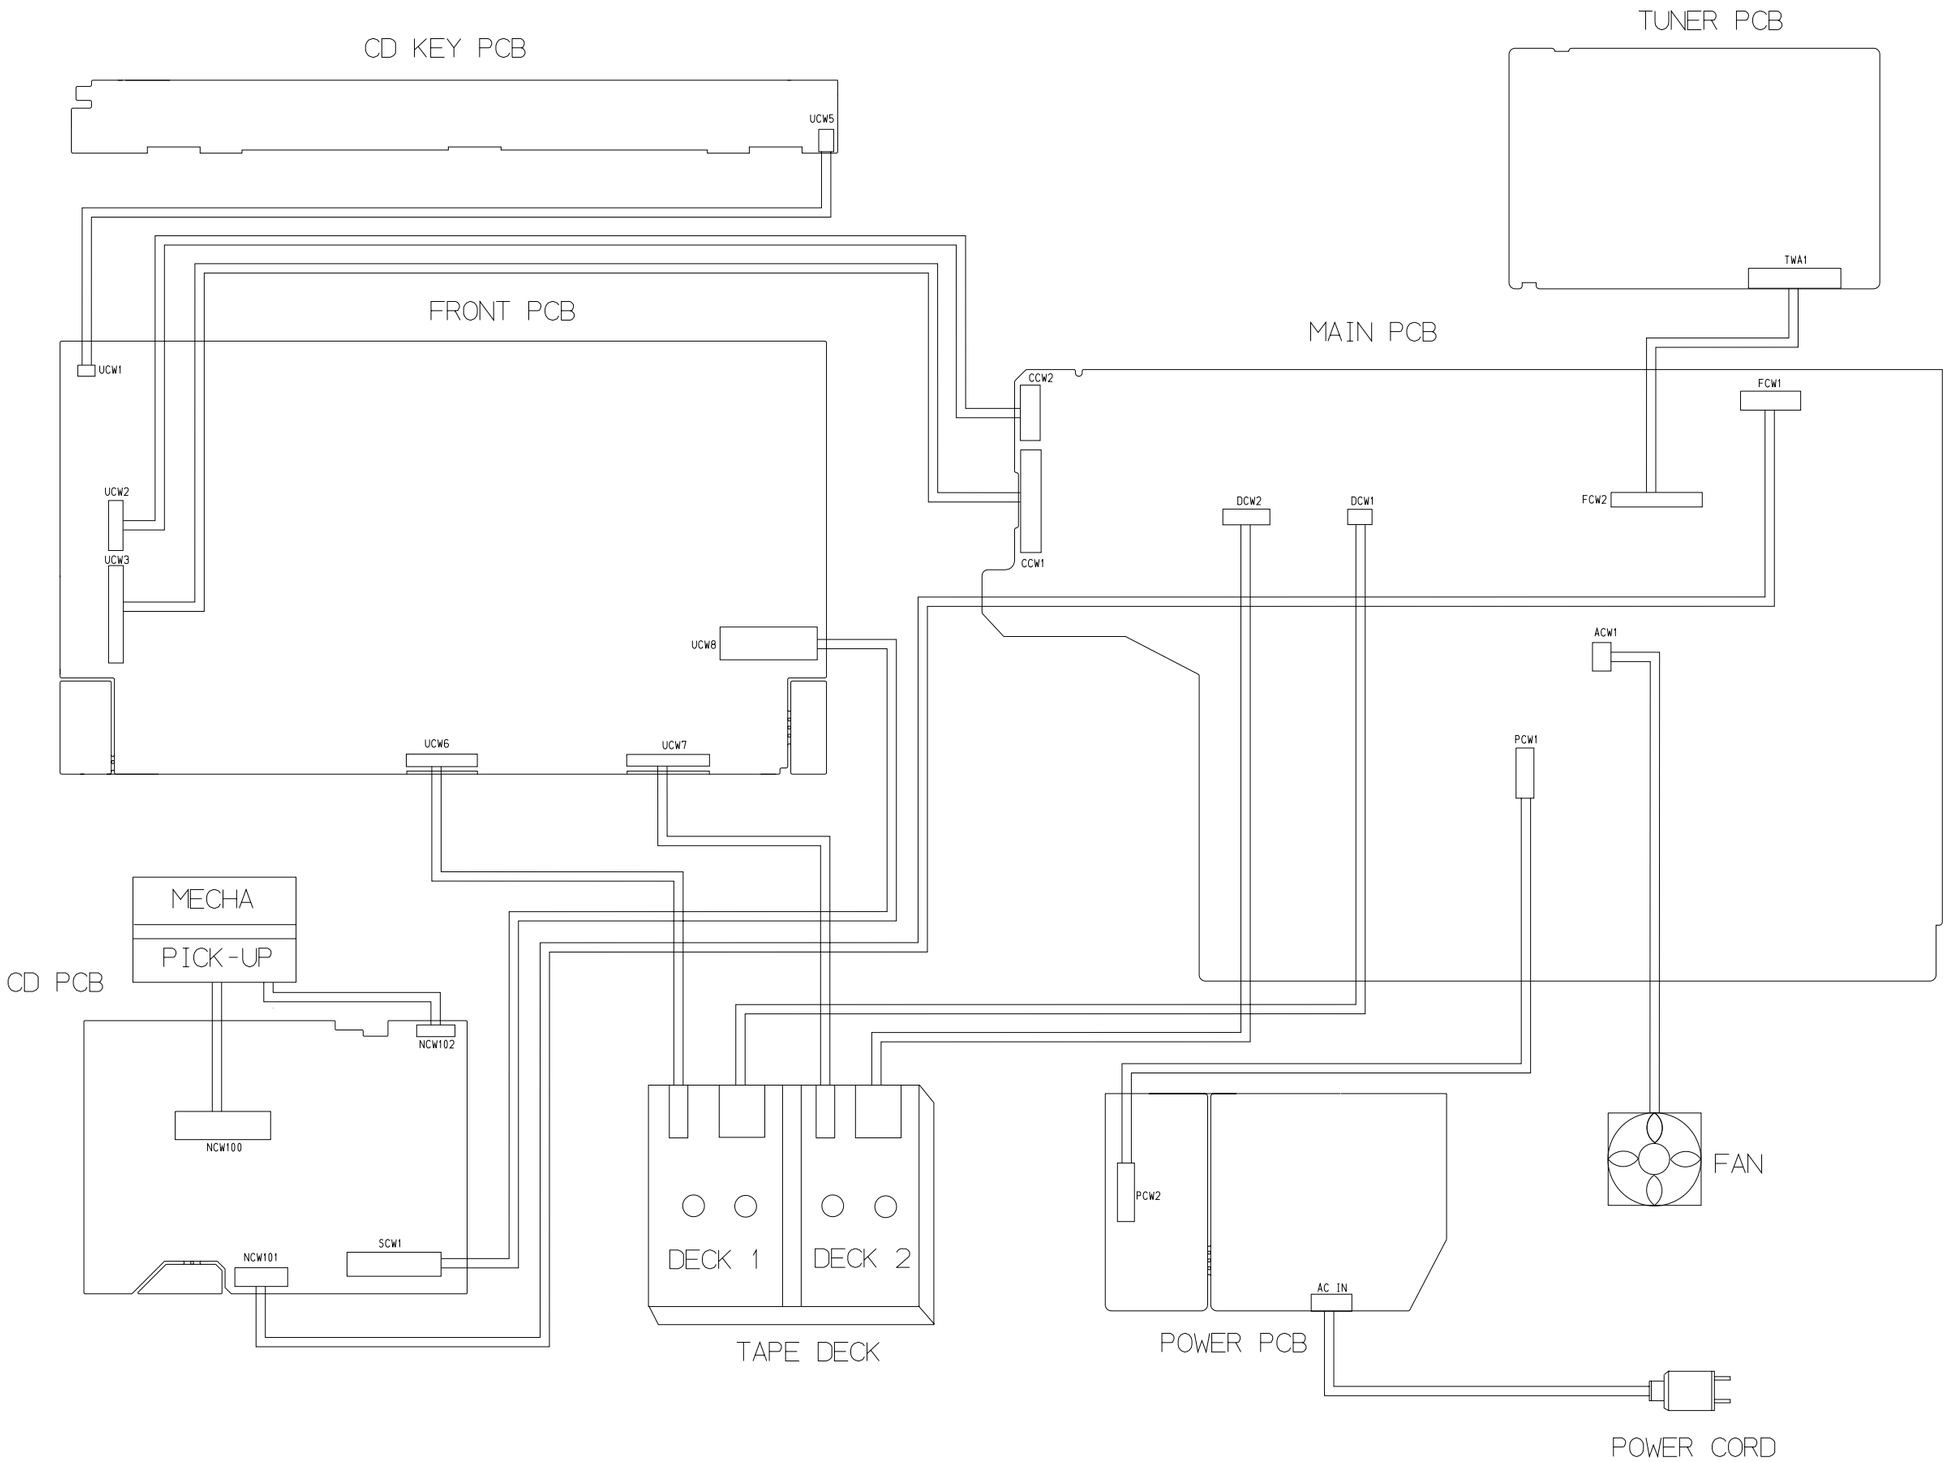

7. Schematic Diagram

7-1 CD Part(COMMON)

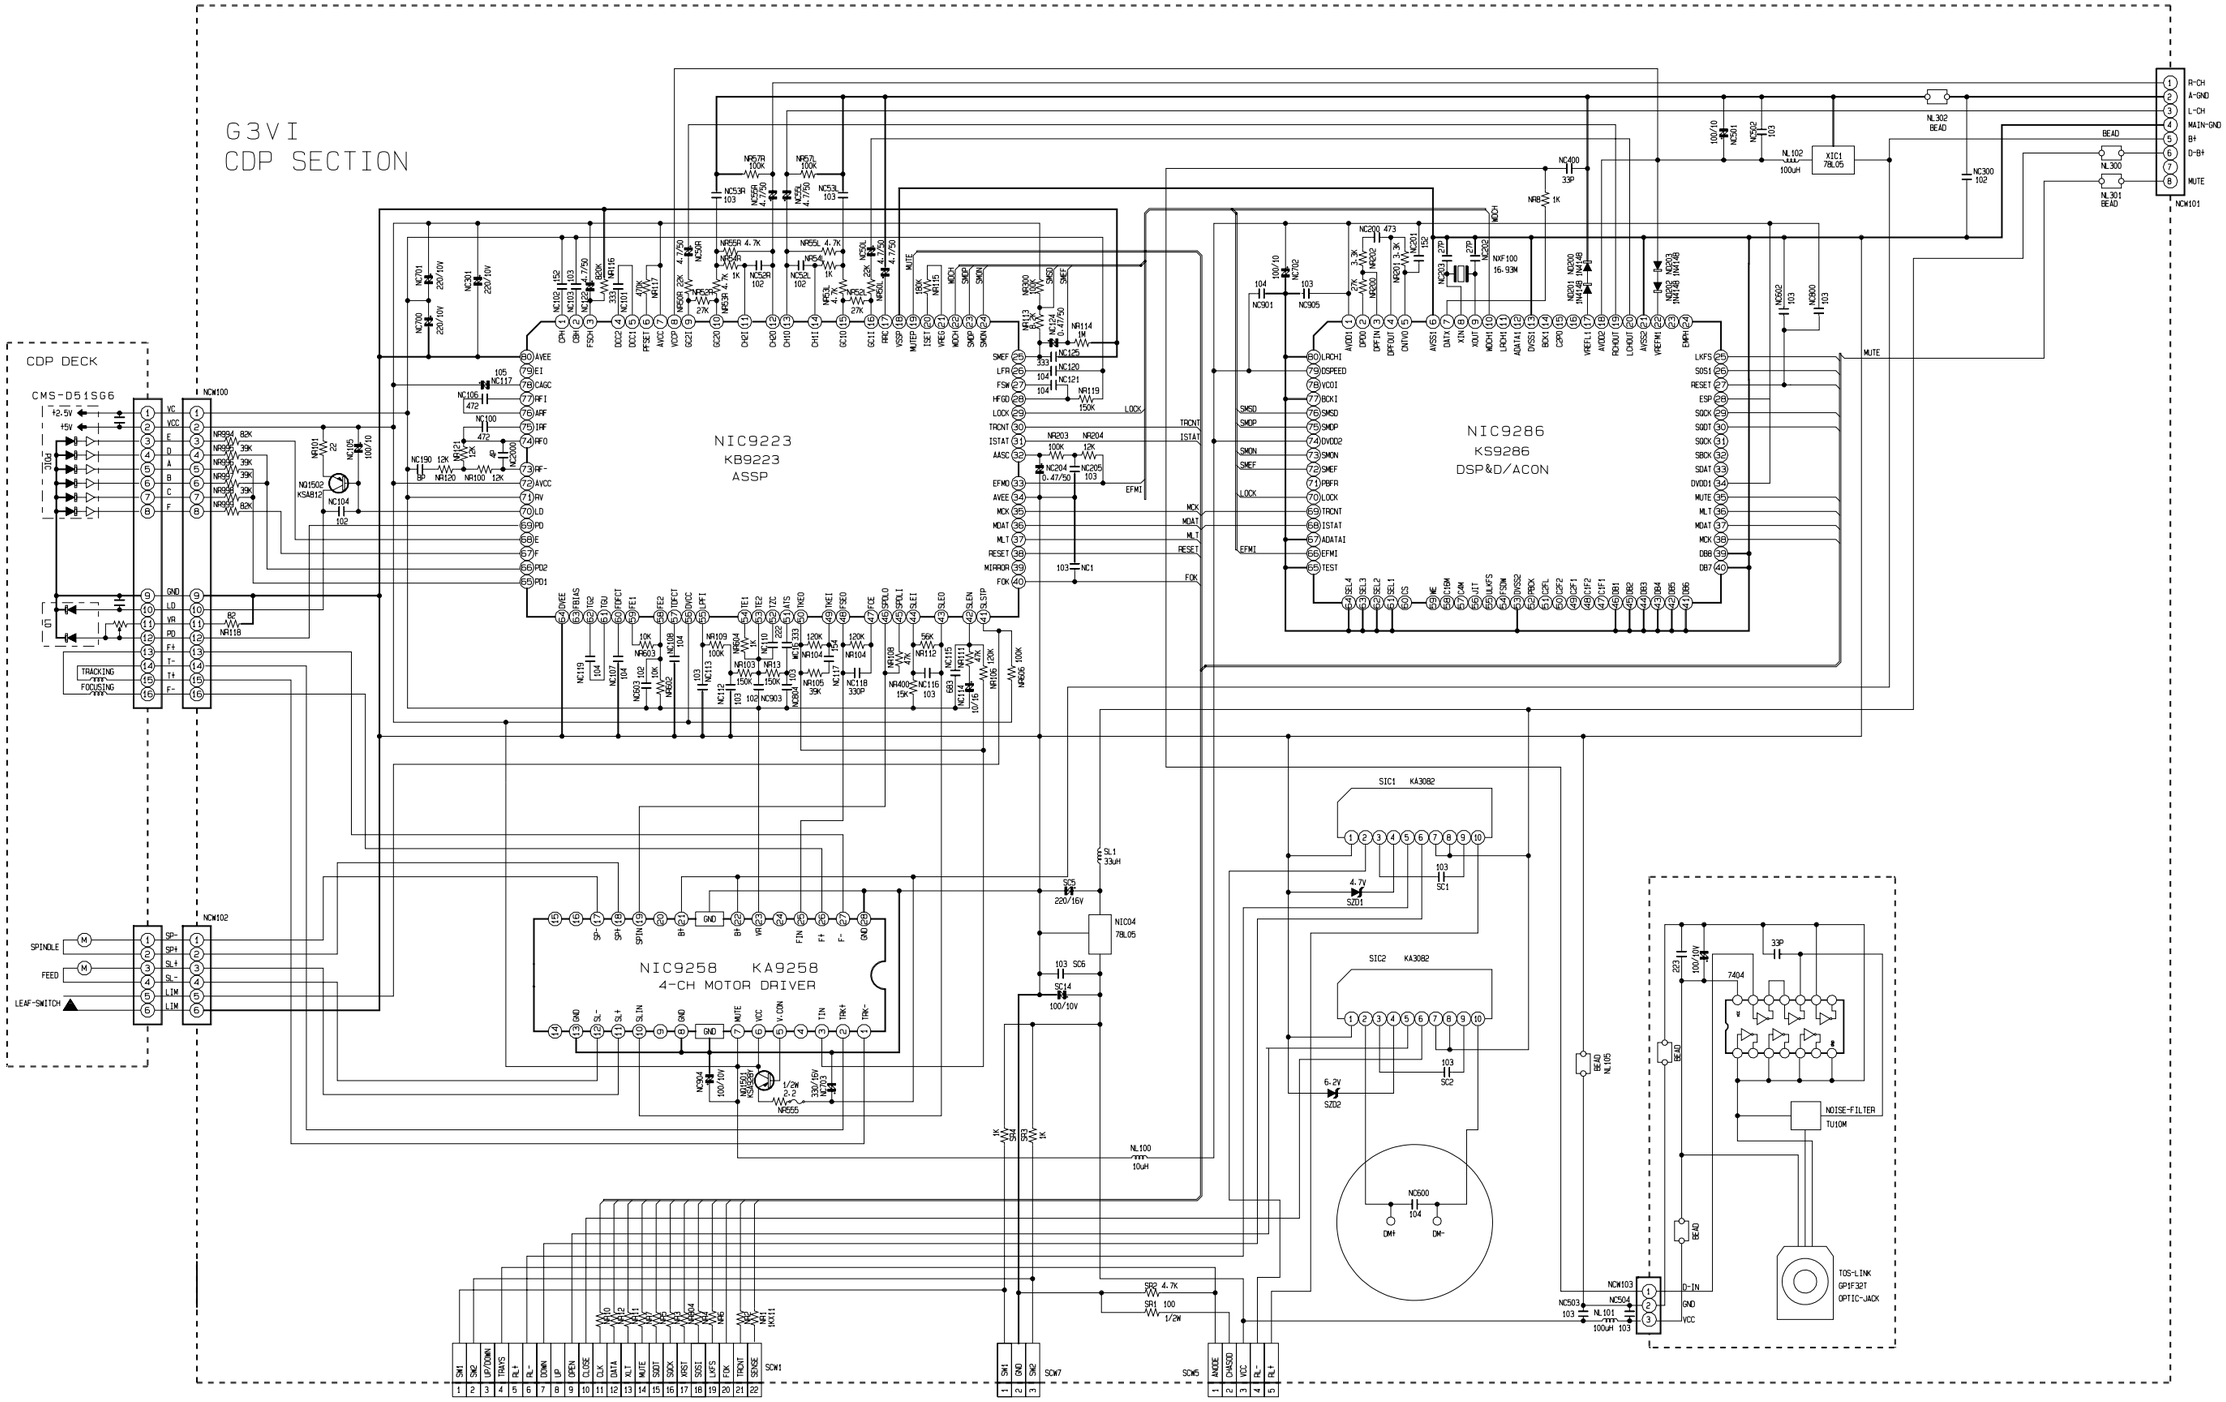

7-2 MAIN Part(COMMON)

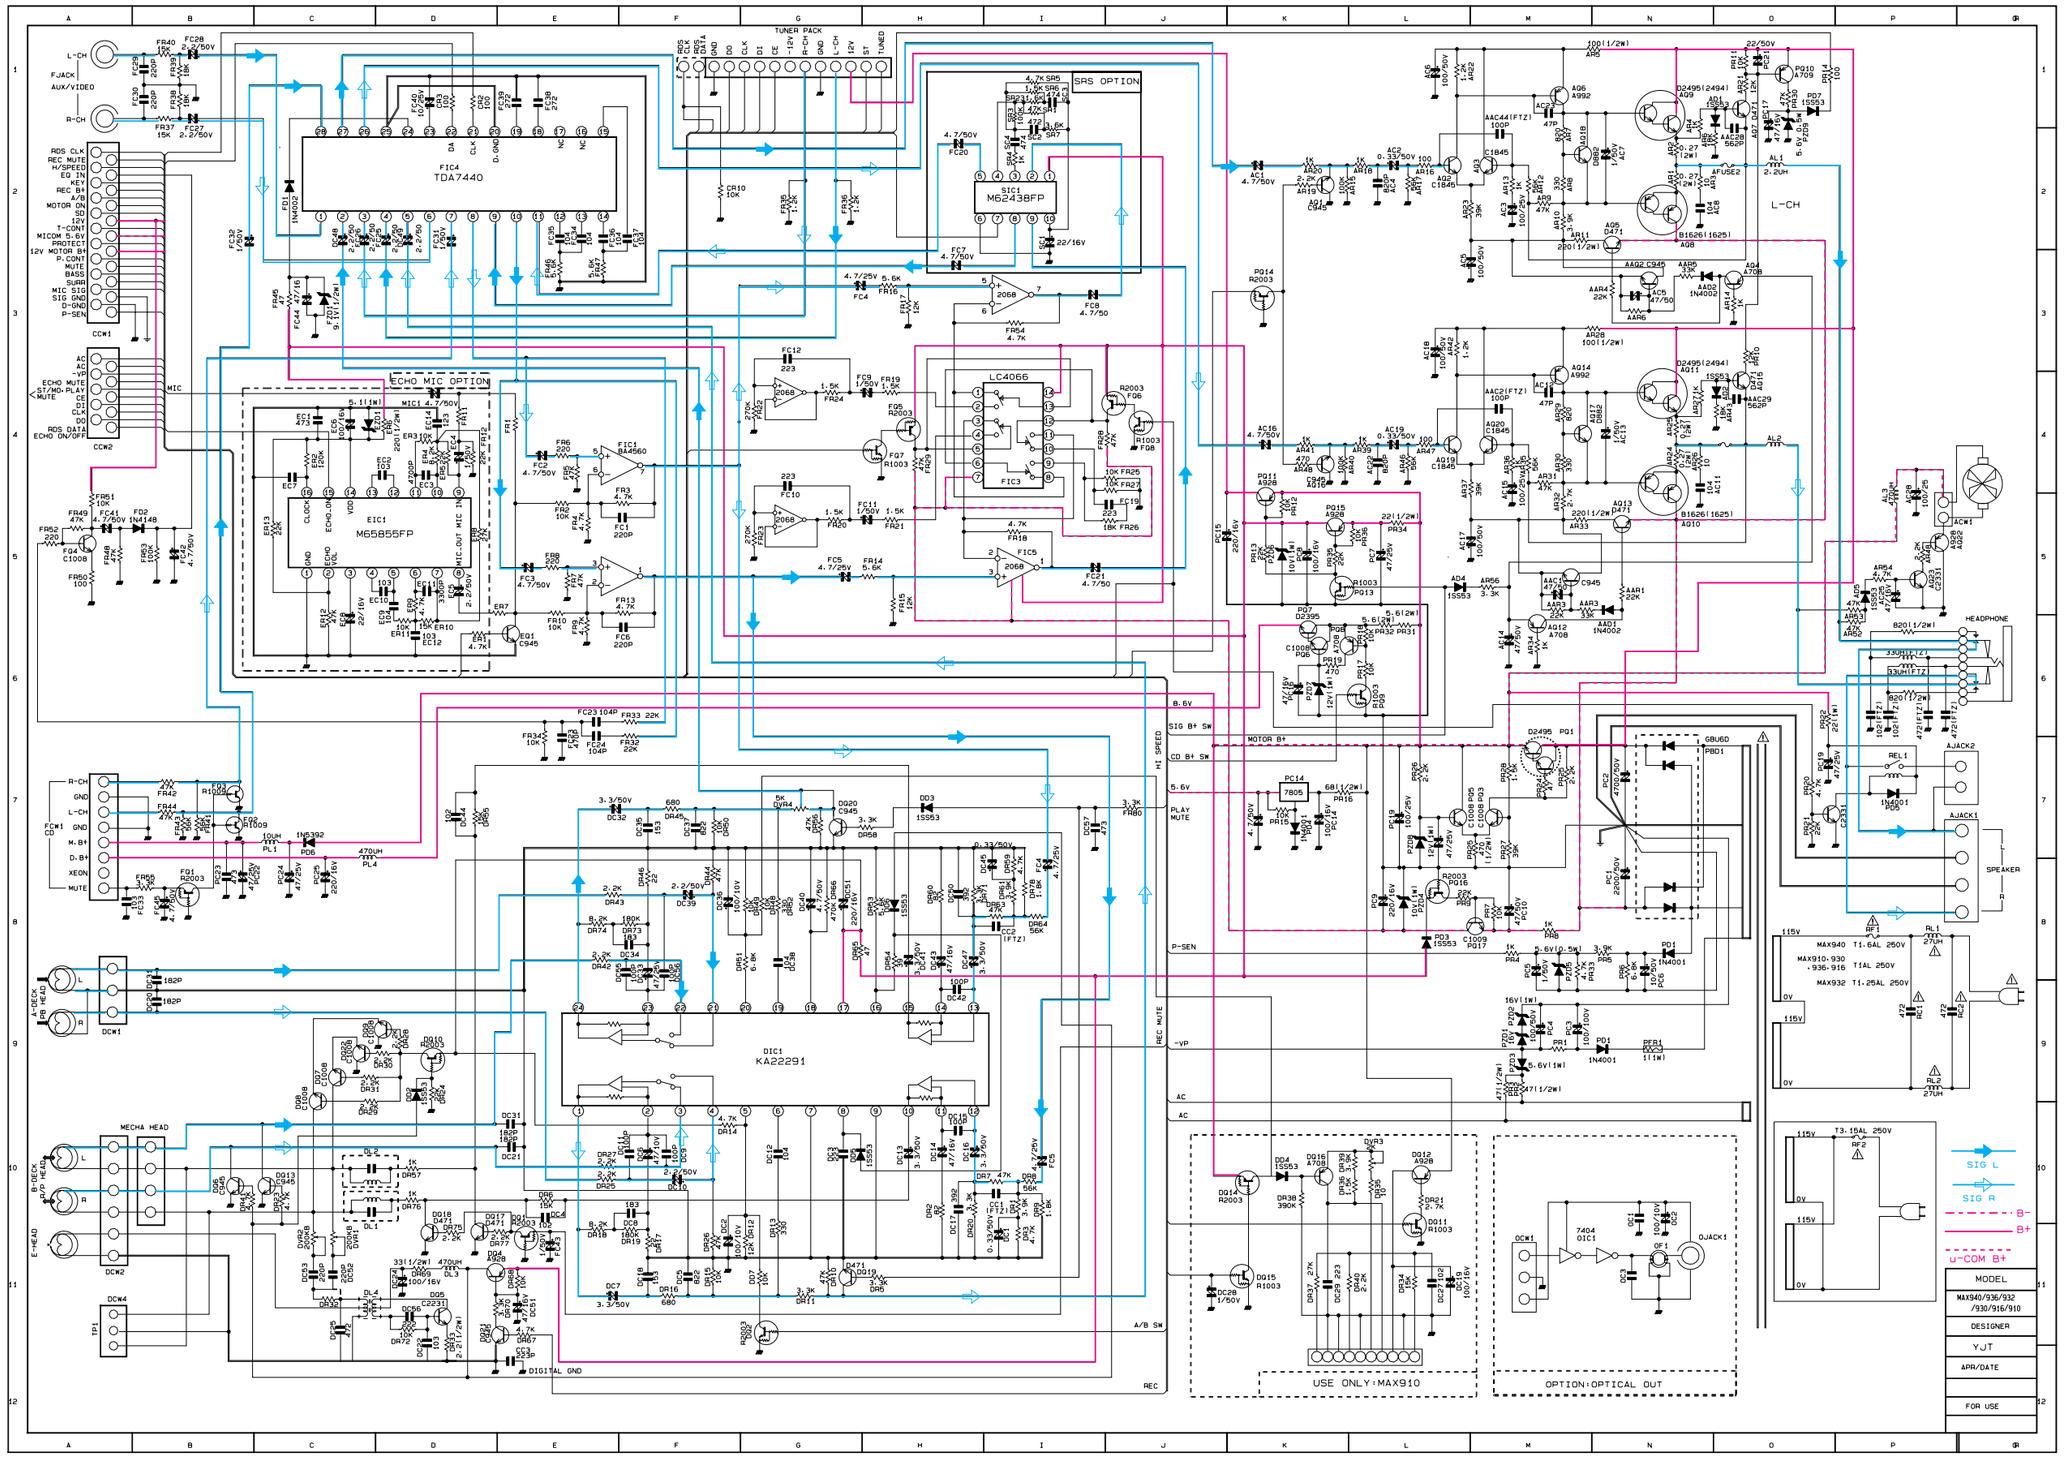

7-3 Front Part(Only MAX929/930/936/939/940/932P/942P)

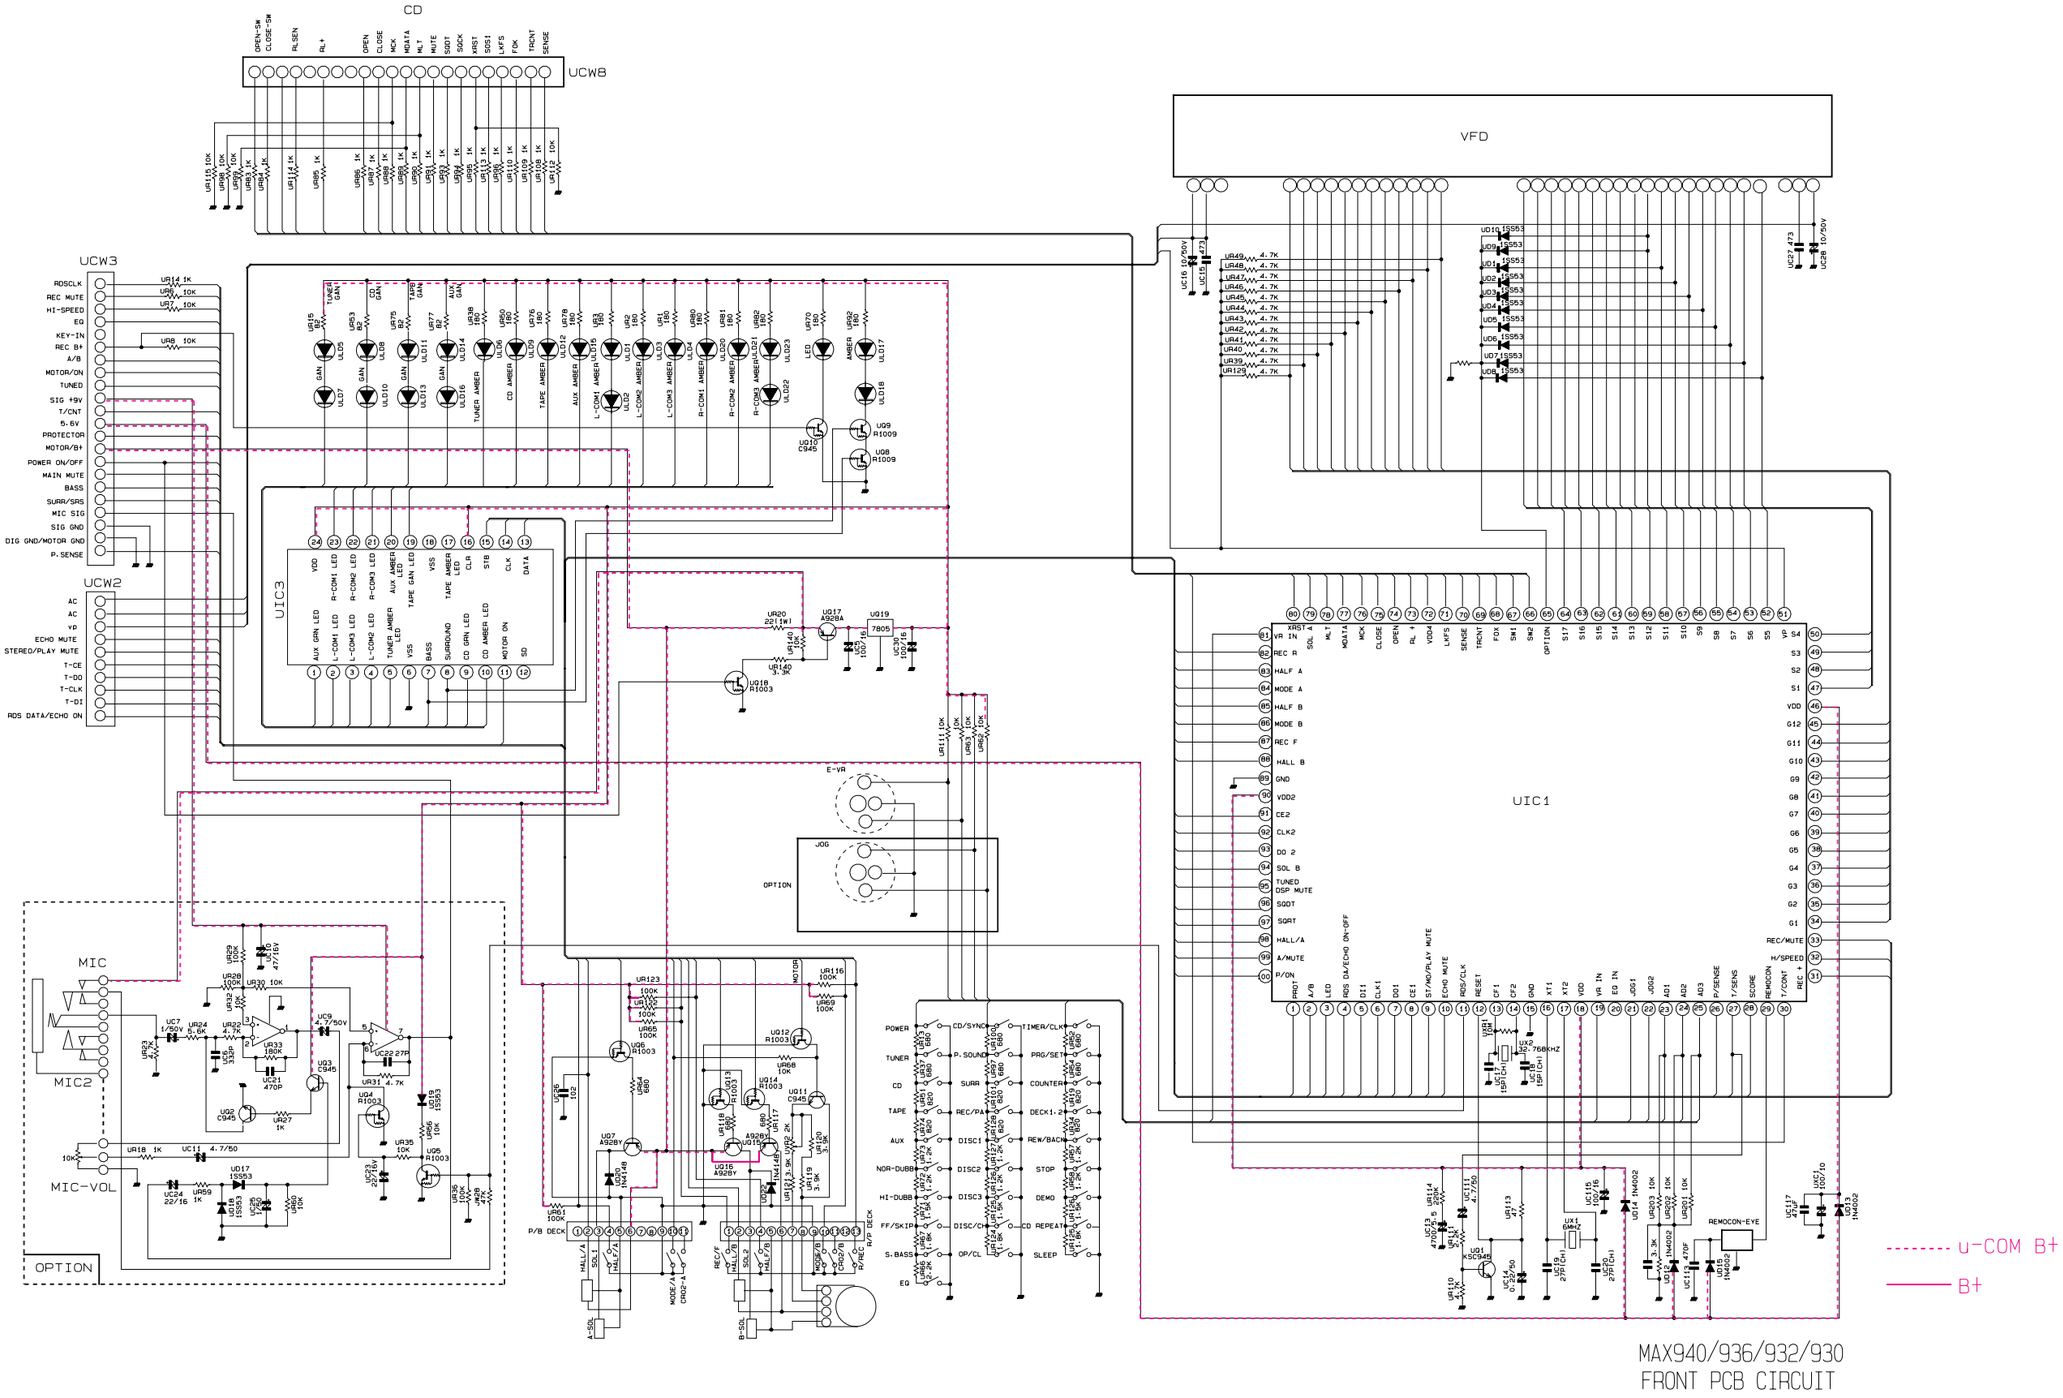

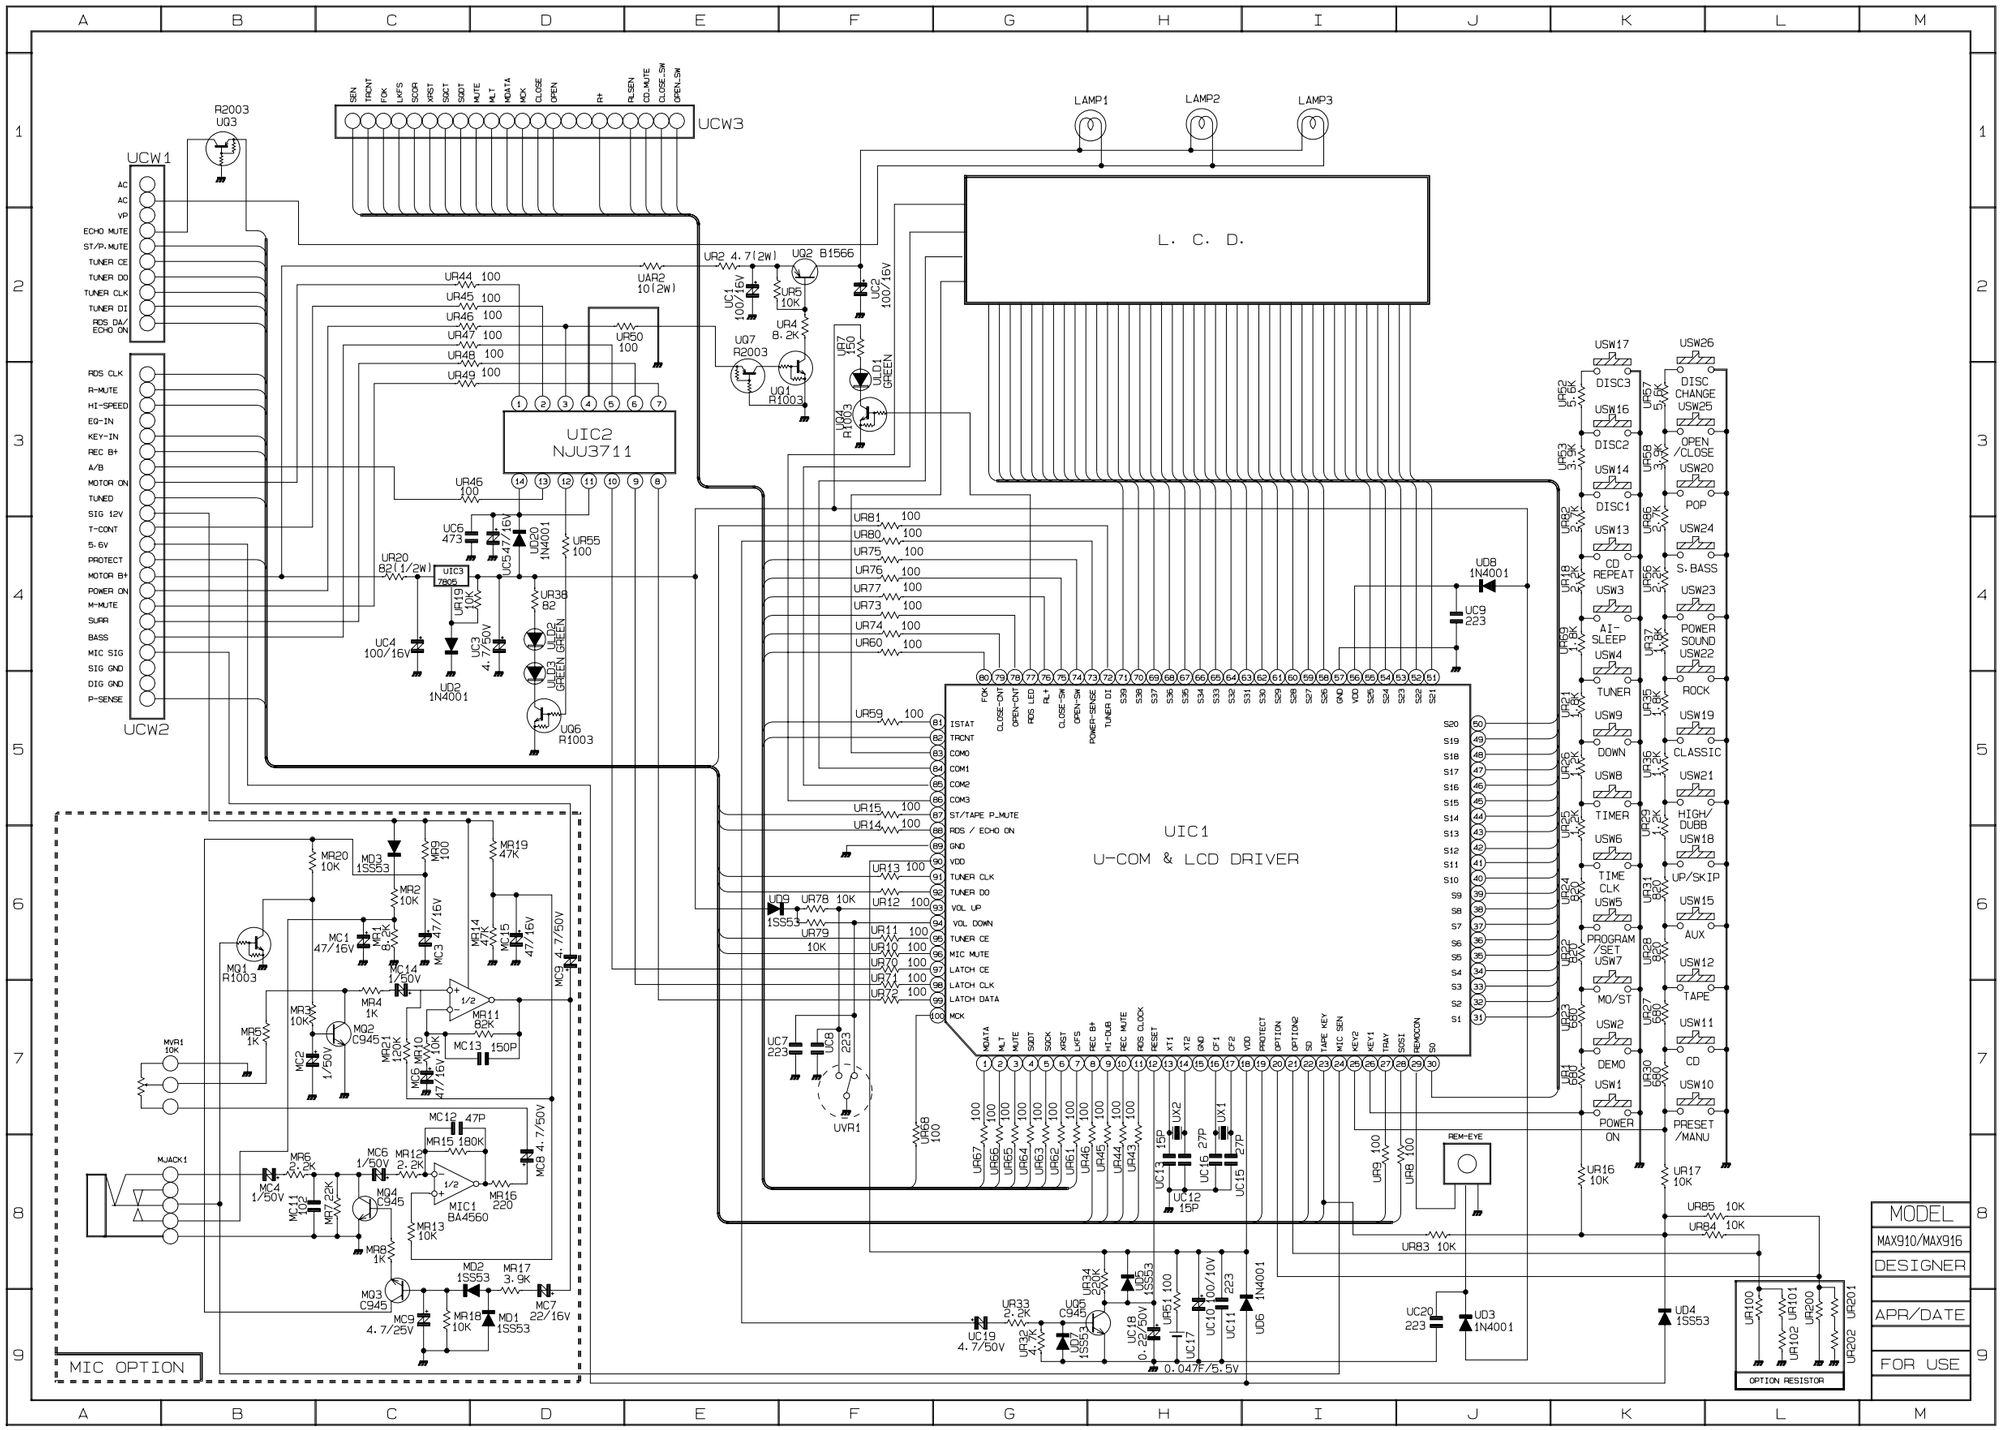
UCW1
UCW2
UCW3
UIC1
U-COM & LCD DRIVER
UIC2
NJU3711
L. C. D.
LAMP1
LAMP2
LAMP3
MIC OPTION
MODEL
MAX910/MAX916
DESIGNER
APR/DATE
FOR USE
OPTION RESISTOR
REM-EYE
DISC3
DISC2
DISC1
CD REPEAT
AI-SLEEP
TUNER
DOWN
TIMER
TIME CLK
PROGRAM /SET
MO/ST
DEMO
POWER ON
DISC CHANGE
OPEN-CLOSE
POP
S.BASS
POWER SOUND
ROCK
CLASSIC
HIGH/DUBB
UP/SKIP
AUX
TAPE
CD
PRESET /MANU

7-5 Pro Logic part(Only MAX932P/942P)

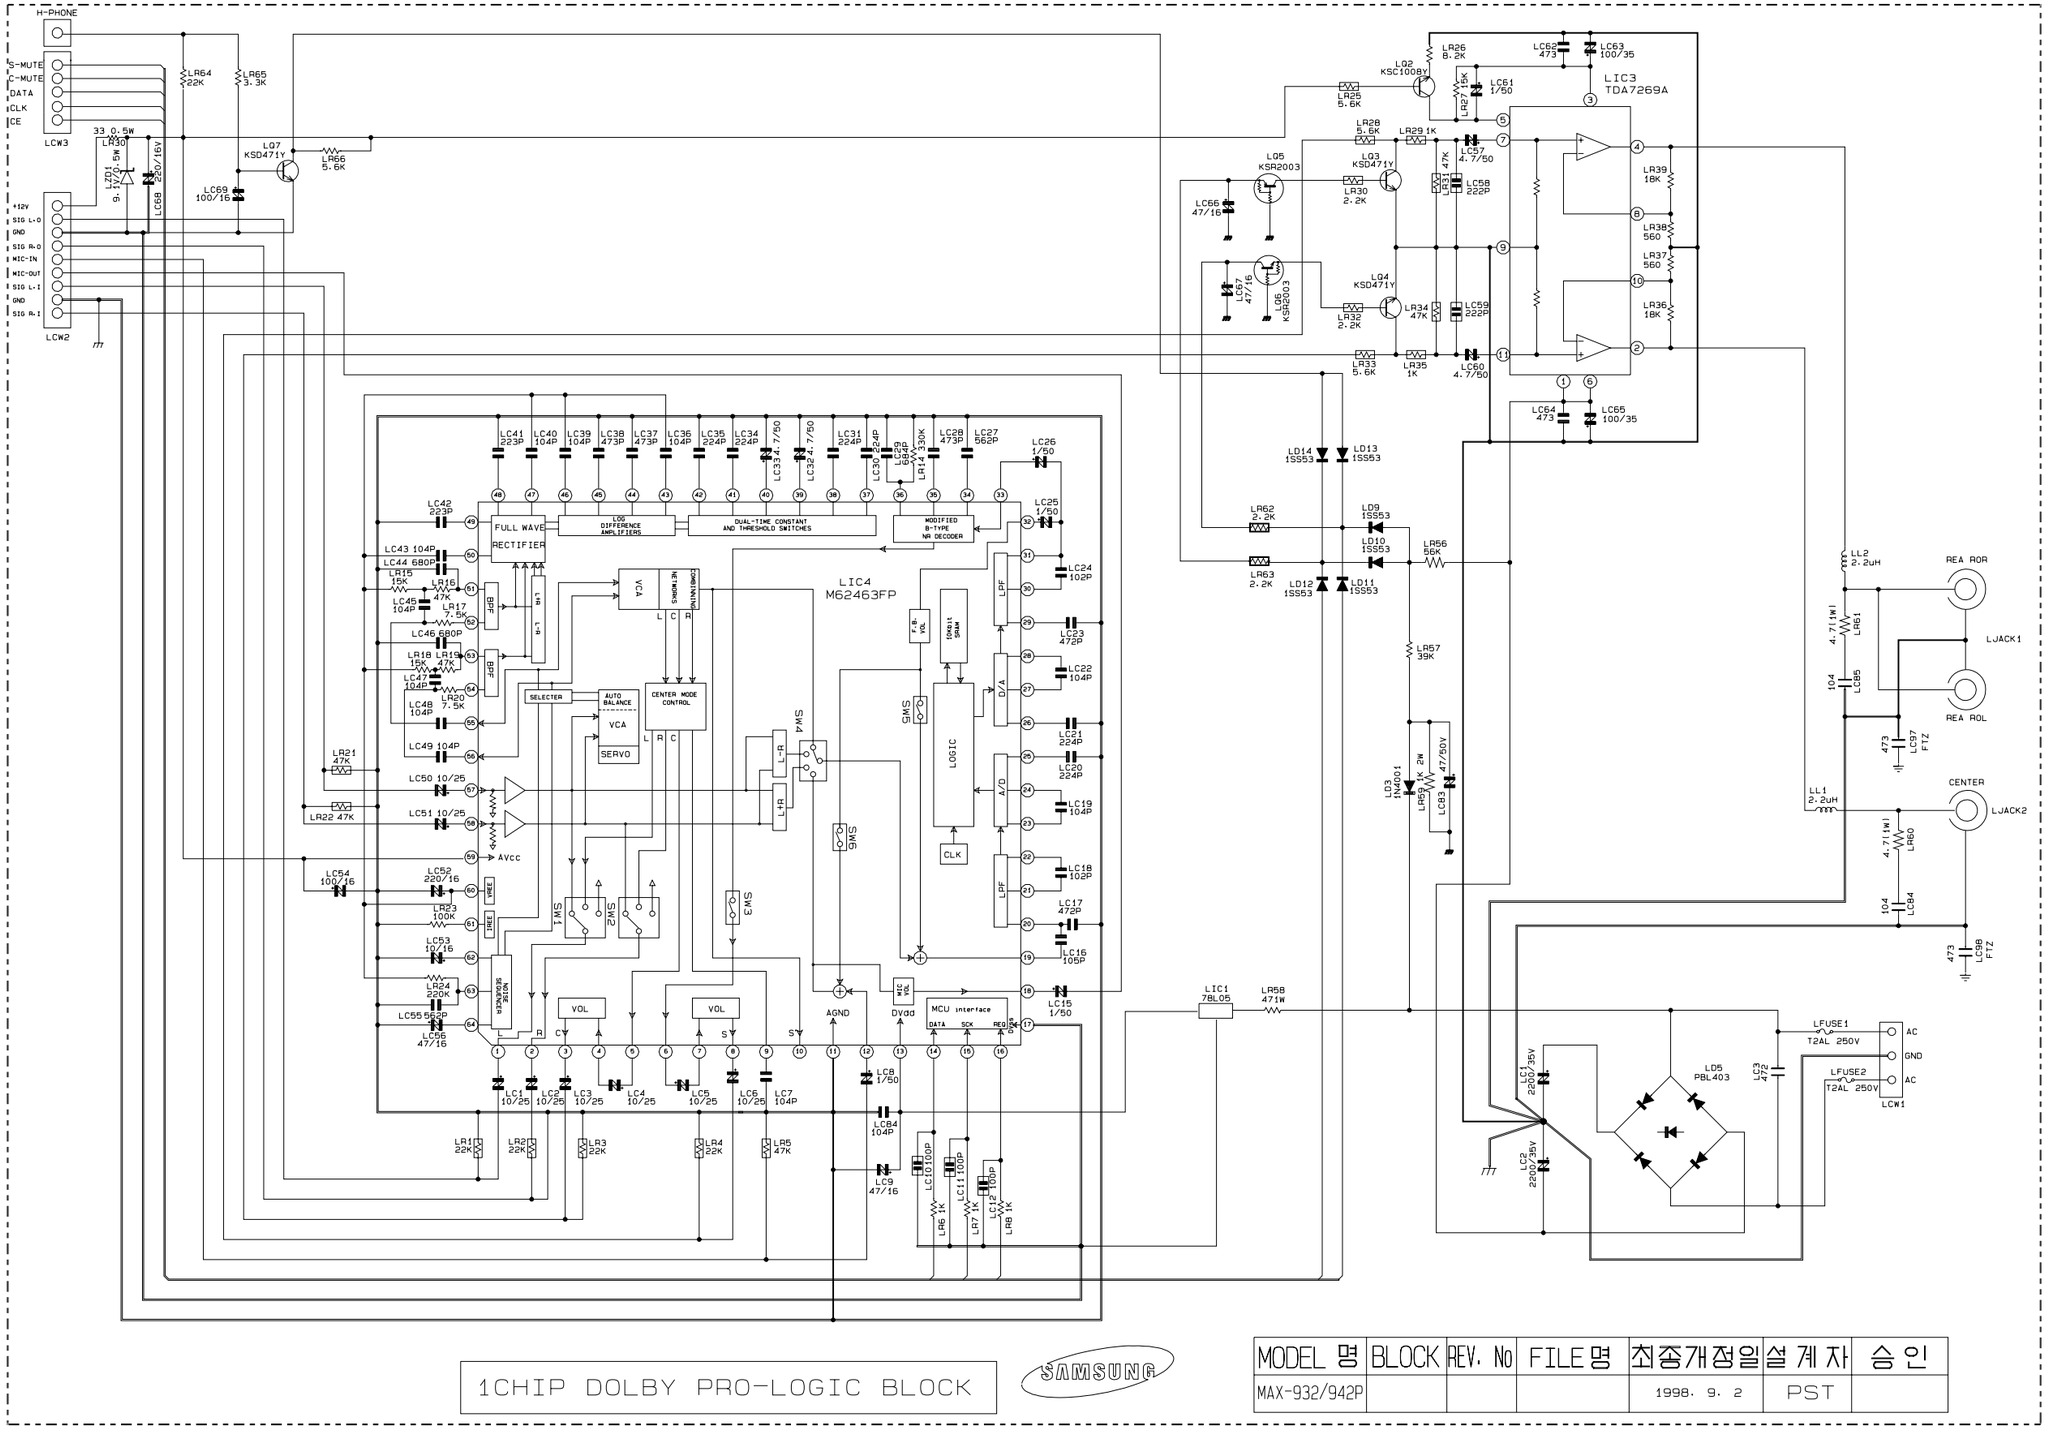

MODEL 명	BLOCK	REV. No	FILE명	최종개정일	설 계 자	승 인
MAX-932/942P				1998. 9. 2	PST	

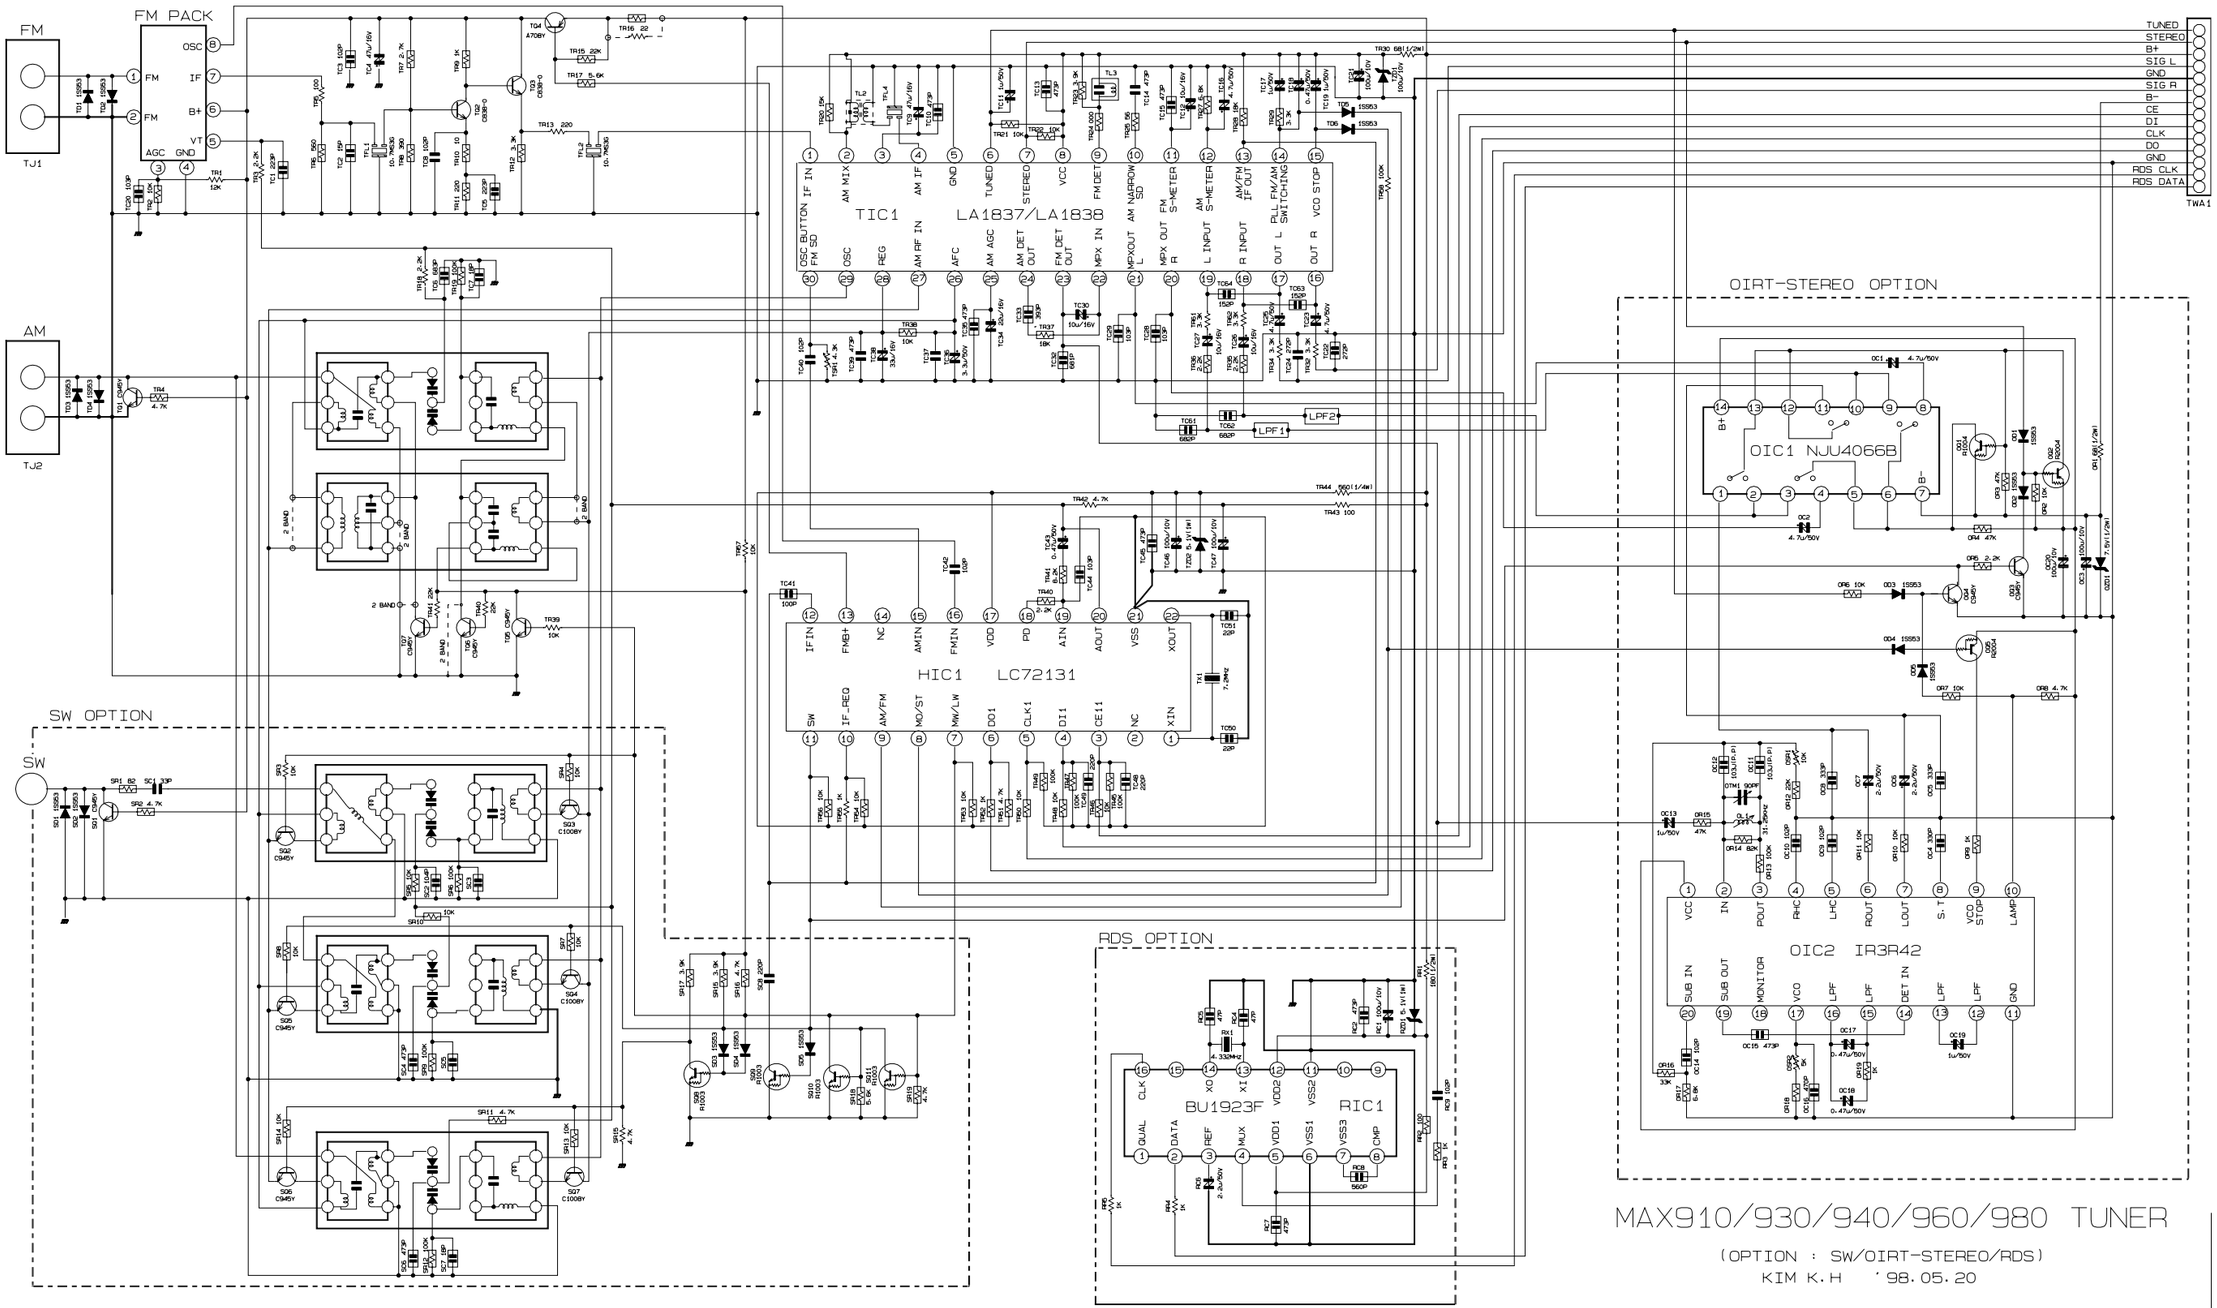
FM
FM PACK
TJ1
AM
TJ2
TIC1 LA1837/LA1838
HIC1 LC72131
RIC1 BU1923F
OIC1 NJU4066B
OIC2 IR3R42
OIRT-STEREO OPTION
RDS OPTION
SW OPTION
SW
TUNED
STEREO
B+
SIG L
GND
SIG R
B-
CE
DI
CLK
DO
GND
RDS CLK
RDS DATA
TWA1
MAX910/930/940/960/980 TUNER
(OPTION : SW/OIRT-STEREO/RDS)
KIM K.H '98.05.20